PART NO.	ENG. NO.	
02-09-1116	1381-(P901)	
02-09-1118	1381-(P901)L	





SECT. "A-A"



SECT. "B-B"

LEGEND

1381-(xxxx)x

- FORM: BLANK=STD. CHAIN, L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE

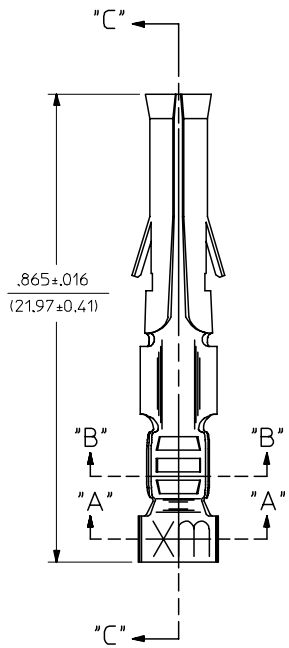

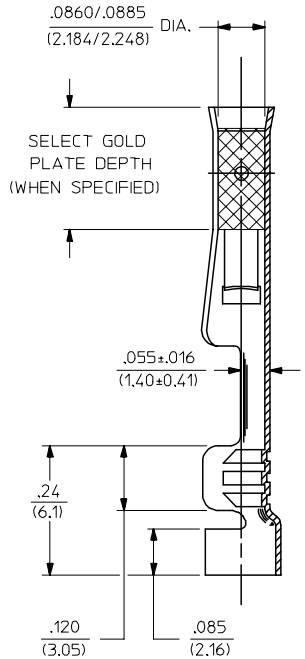

SECT. "C-C"

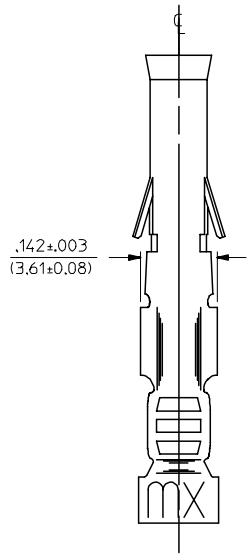



NOTES:

1. MATERIAL: BRASS
2. FINISHES:
   901 HOT TIN DIP .000020/(0.00051) MIN.
3. THIS PART CONFORMS TO PROD. SPEC. PS-43660-9999.
4. PACKAGING SPECIFICATION: N/A
5. TERMINAL FOR USE WITH .093/(2.36) SERIES HOUSINGS AND WILL ACCEPT 18 THRU 22 AWG WIRE.
6. INSERTION FORCE: 3.5 LBS. AVG. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
7. RETENTION: 20 LBS. MIN. FROM HOUSING.

DIMPLE P/N'S ONLY
EC NO: UCP2006-2900 2006/06/29
DRWN:PRIDDER 2006/07/05
CH'KD:AELHAG 2006/07/05
APPR:FSMITH 2006/07/05
DESCRIPTION
REV E

QUALITY SYMBOLS
▼=0
(C)=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± .014
1 PLACE	± 0.35	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 6:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	GWC	1995/02/10
CHECKED BY	RW	1995/02/10
APPROVED BY	RAS	1995/02/10

TITLE: CRIMP TERMINAL, DIMPLED FEMALE, .093/(2.36) DIA. 18-22 AWG

molex MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-1381-xx
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION