



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
	-		B	RELEASED, ET00-0224-04	11 NOV 2004	HY	GT
			B1	UPDATED, ET00-0012-05	12 JAN 2005	HY	GT
			B2	P/N 293009-3 ADDED AS PRELIMINARY	02 DEC 2009	PKS	RRP
			B3	PN 293009-3 RELEASED	10MAR2011	PKS	MP

D

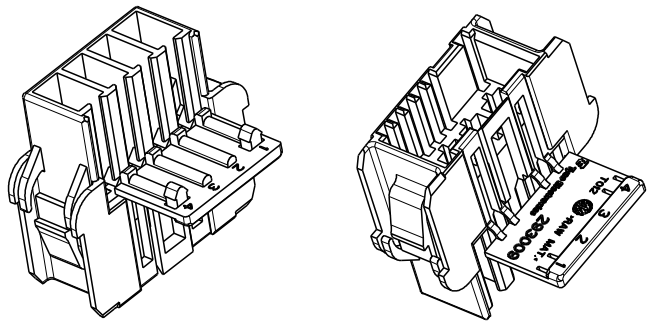



SCALE 1:1

POLARIZATION KEYS SCHEME

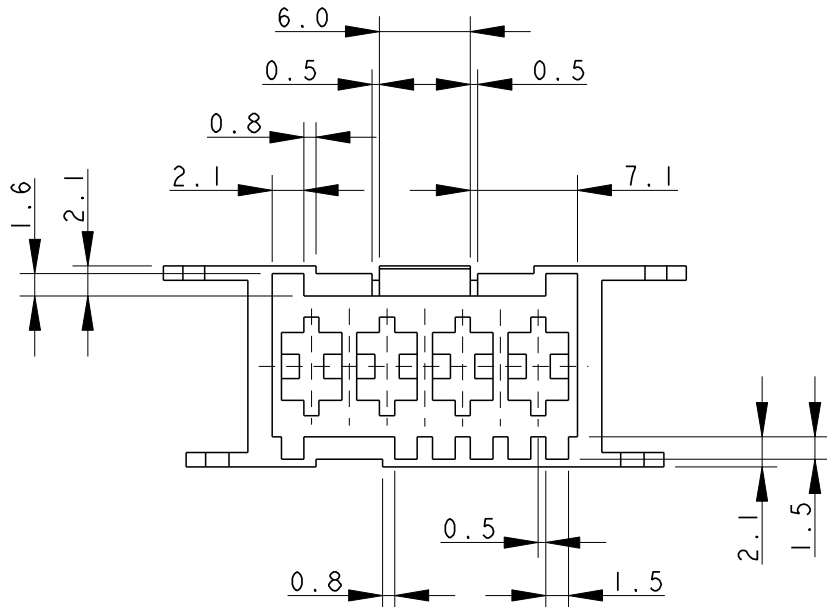


PANEL MOUNT
DIMENSIONS
SCALE 1:1

NO FLASH PERMITTED

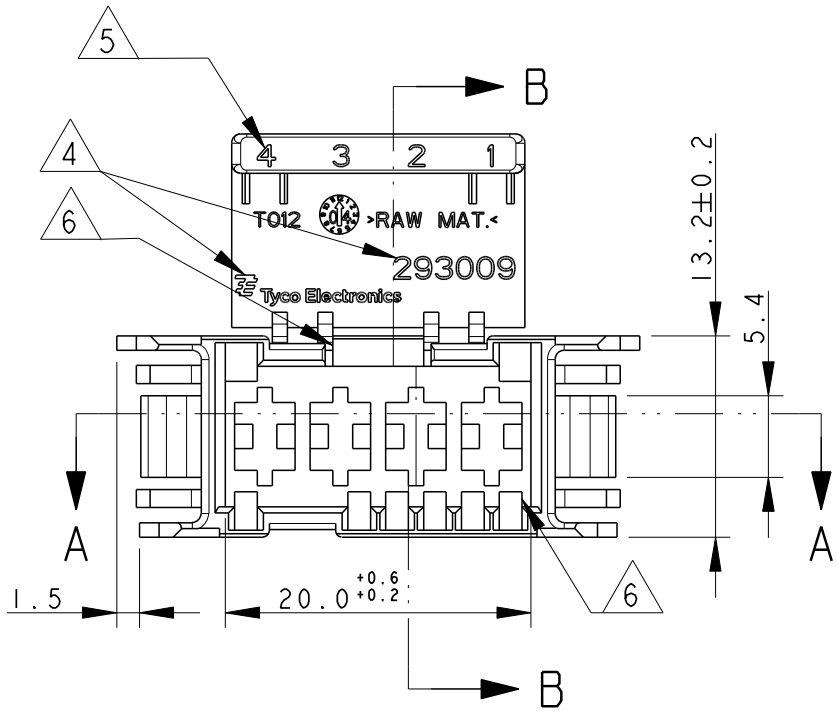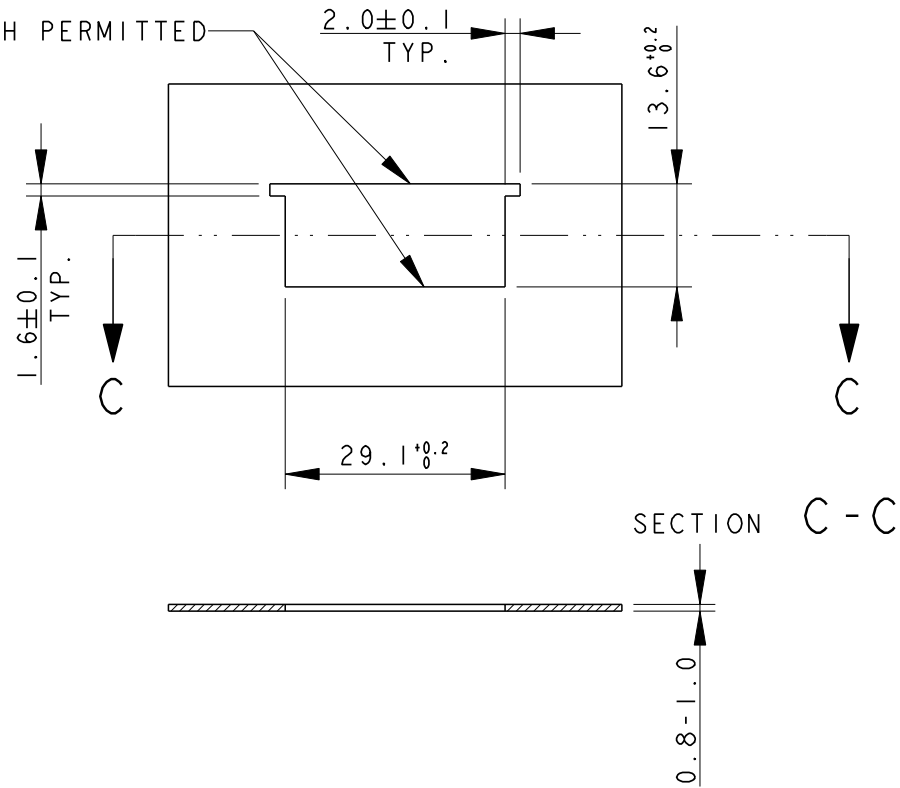





SECTION A - A

SECTION B - B

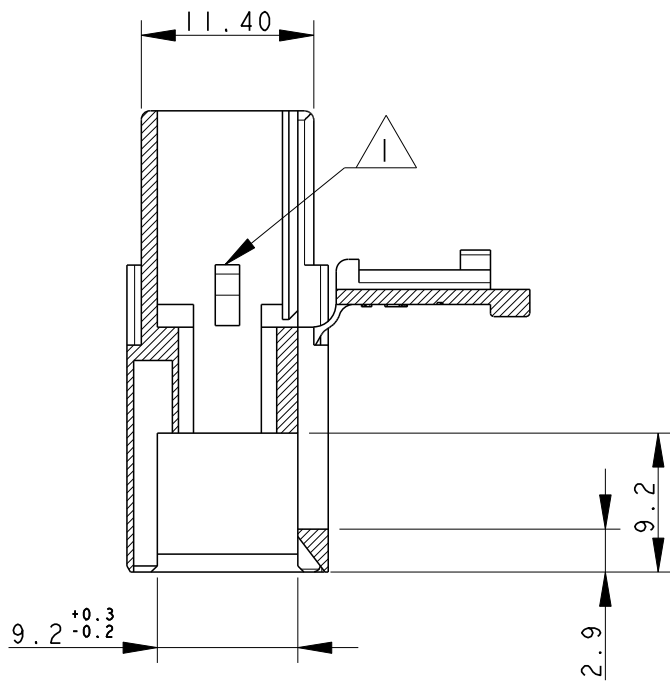

- 1 TYPICAL CAVITY SUITABLE FOR:
FASTIN-FASTON TAB CONTACTS 6.3 mm SRS:
P/N: 60294, 0.3-0.8 mm² WIRE RANGE
160691, 0.3-0.8 mm² WIRE RANGE
AMPLIVAR CONTACTS:
P/N: 141051, 0.1-0.5 mm² WIRE RANGE
142411, 0.3-1.6 mm² WIRE RANGE
MAX. INSULATION DIA. 2.8 mm,
MAX. INSULATION CRIMP WIDTH 3.3 mm.
- 2) PA6 UNFILLED, UL 94-V2, NATURE COLOUR
ACCORDING TO IEC 60335-1 NORM.
- 3) PA66 UNFILLED, UL 94-V2, NATURE COLOUR
- 4 TE TRADEMARK "LOGO" AND
TYCO ELECTRONICS "PART NUMBER"
OPTIONAL POSITION.
- 5 CIRCUIT IDENTIFICATION NUMBERS, 1 TO 4
- 6 POLARIZATION KEYS DIMENSIONS AND POSITIONS
ARE ACCORDING TO "RAST 5" NORM
RAST CODE 04-B, 04-C, 04-F, 04-G.
- 7) PA66 UNFILLED, UL 94-V0 GWT, NATURE COLOUR

B

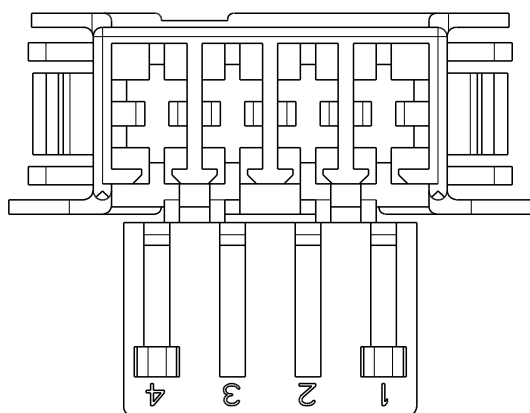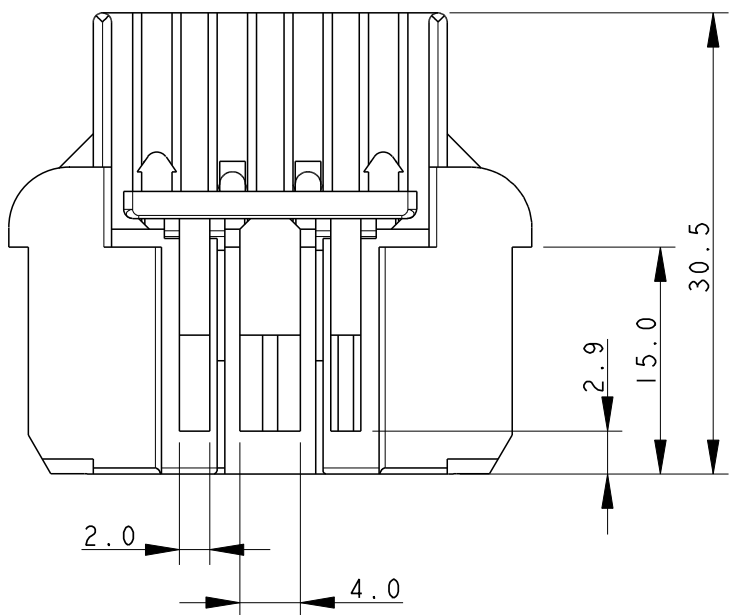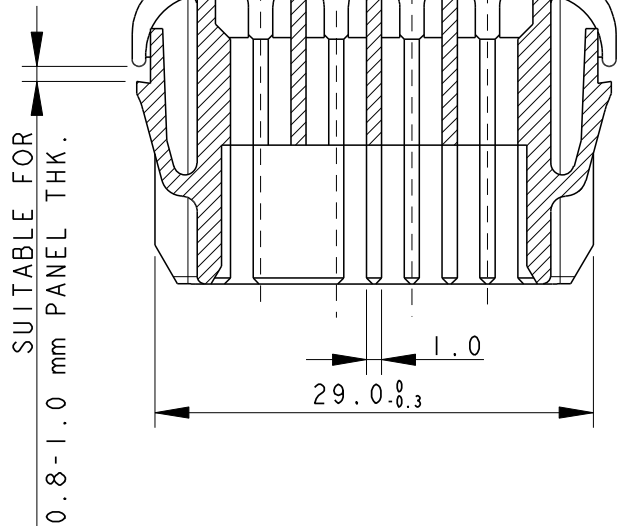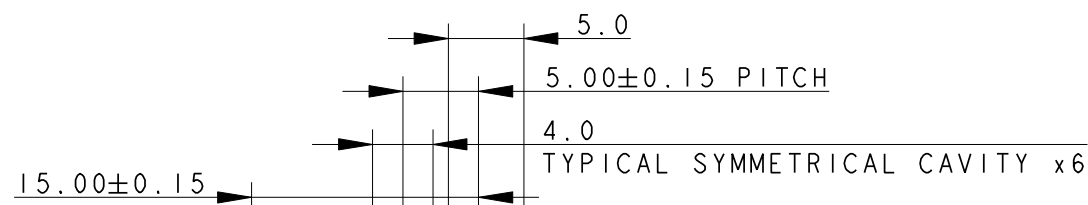

A

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN H. YAALI	29 JAN 2004	Tyco Electronics AMP Italia S.p.A. C.so F. Cervi, 15 COLLEGNO (TO)	
DIMENSIONS:		CHK C. TARTARI	-	NAME 4 POS. FASTIN-FASTON Connector TAB HOUSING, RAST 5 0.8-1.0 MM THK. PANEL MOUNT VERSION	
mm		APVD -	-	SIZE A2	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-20256	-	CAGE CODE 00779	
0 PLC ± 1 PLC ±0.3 2 PLC ± 3 PLC ± 4 PLC ±		APPLICATION SPEC -	-	DRAWING NO C-293009	
MATERIAL SEE TABLE		WEIGHT -	-	RESTRICTED TO -	
FINISH SEE TABLE		CUSTOMER DRAWING		SCALE 3:1	SHEET 1 OF 1
				REV B3	

D

C

B

A