

- **Excellent Output Drive Capability**
 $V_O = \pm 2.5 \text{ V Min at } R_L = 100 \, \Omega$,
 $V_{CC\pm} = \pm 5 \text{ V}$
 $V_O = \pm 12.5 \text{ V Min at } R_L = 600 \, \Omega$,
 $V_{CC\pm} = \pm 15 \text{ V}$
- **Low Supply Current . . . 280 μA Typ**
- **Decompensated for High Slew Rate and Gain-Bandwidth Product**
 $A_{VD} = 0.5 \text{ Min}$
Slew Rate = 10 V/μs Typ
Gain-Bandwidth Product = 6.5 MHz Typ


- **Wide Operating Supply Voltage Range**
 $V_{CC\pm} = \pm 3.5 \text{ V to } \pm 18 \text{ V}$
- **High Open-Loop Gain . . . 280 V/mV Typ**
- **Low Offset Voltage . . . 500 μV Max**
- **Low Offset Voltage Drift With Time**
0.04 μV/Month Typ
- **Low Input Bias Current . . . 5 pA Typ**

description

The TLE2161, TLE2161A, and TLE2161B are JFET-input, low-power, precision operational amplifiers manufactured using the Texas Instruments Excalibur process. Decompensated for stability with a minimum closed-loop gain of 5, these devices combine outstanding output drive capability with low power consumption, excellent dc precision, and high gain-bandwidth product.

In addition to maintaining the traditional JFET advantages of fast slew rates and low input bias and offset currents, the Excalibur process offers outstanding parametric stability over time and temperature. This results in a device that remains precise even with changes in temperature and over years of use.

**MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE
vs
LOAD RESISTANCE**

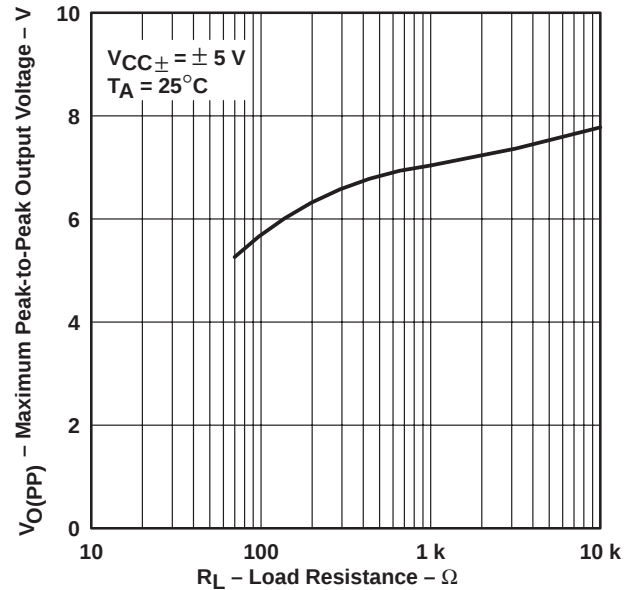

AVAILABLE OPTIONS

T_A	V_{IOmax} AT 25°C	PACKAGE			
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)
0°C to 70°C	500 μV 1.5 mV 3 mV	— TLE2161ACD TLE2161CD	— —	— —	TLE2161BCP TLE2161ACP TLE2161CP
–40°C to 85°C	500 μV 1.5 mV 3 mV	— TLE2161AID TLE2161ID	— —	— —	TLE2161BIP TLE2161AIP TLE2161IP
–55°C to 125°C	500 μV 1.5 mV 3 mV	— TLE2161AMD TLE2161MD	— TLE2161AMFK TLE2161MFK	TLE2161BMJG TLE2161AMJG TLE2161MJG	TLE2161BMP TLE2161AMP TLE2161MP

The D packages are available taped and reeled. Add R suffix to device type (e.g., TLE2161ACDR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1996, Texas Instruments Incorporated

TLE2161, TLE2161A, TLE2161B

EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE



μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

description (continued)


A variety of available options includes small-outline packages and chip-carrier versions for high-density system applications.

The C-suffix devices are characterized for operation from 0°C to 70°C. The I-suffix devices are characterized for operation from – 40°C to 85°C. The M-suffix devices are characterized for operation over the full military temperature range of – 55°C to 125°C.

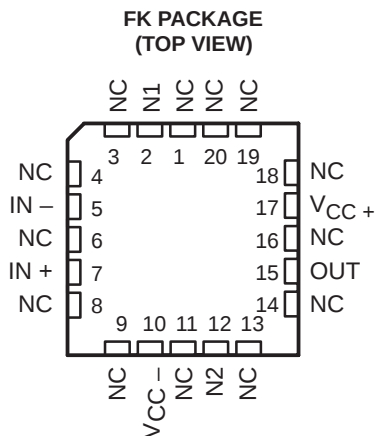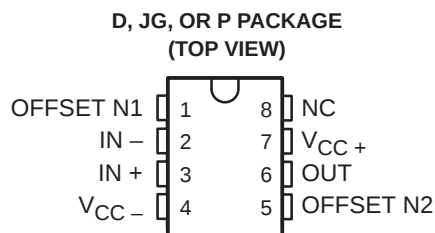

NC – No internal connection

equivalent schematic

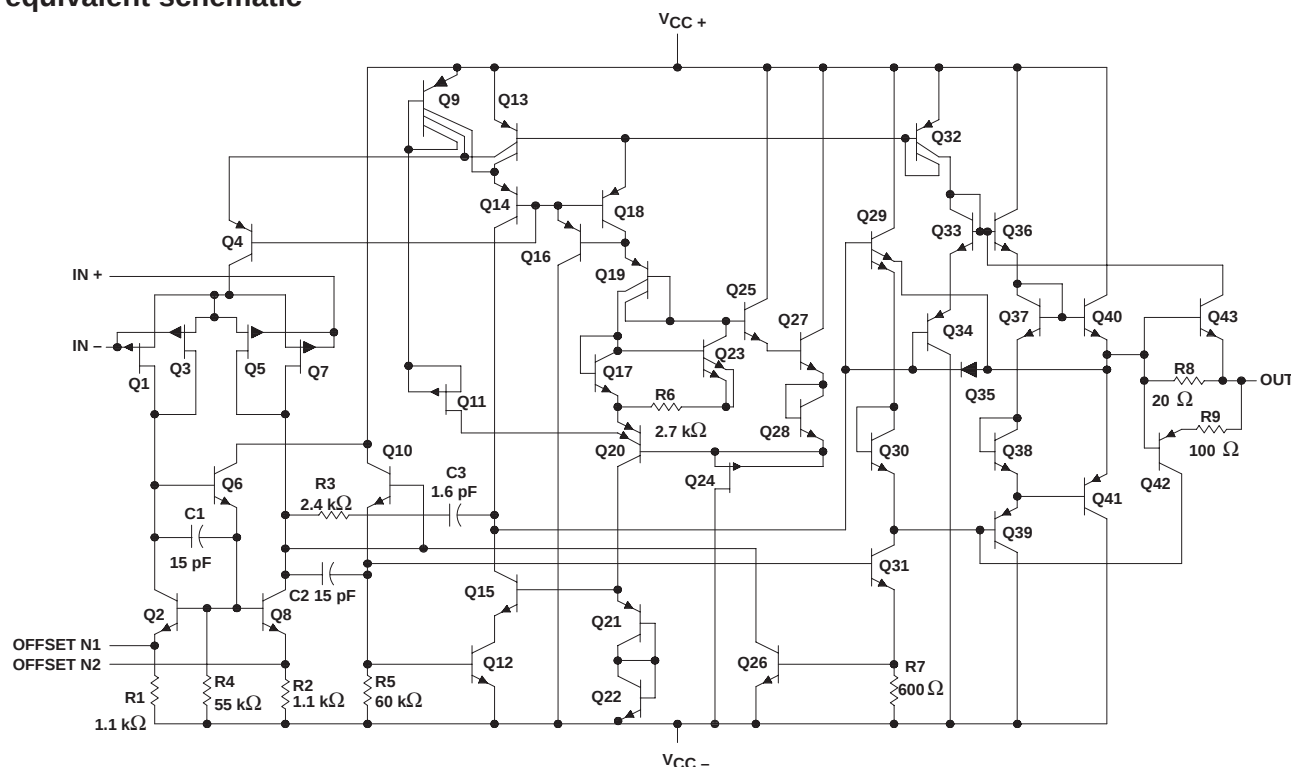

All component values are nominal.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage, V_{CC+} (see Note 1)	19 V
Supply voltage, V_{CC-}	– 19 V
Differential input voltage, V_{ID} (see Note 2)	± 38 V
Input voltage range, V_I (any input)	V_{CC+}
Input current, I_I (each input)	± 1 mA
Output current, I_O	± 80 mA
Total current into V_{CC+}	80 mA
Total current out of V_{CC-}	80 mA
Duration of short-circuit current at (or below) 25°C (see Note 3)	unlimited
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range, T_A : C suffix	0°C to 70°C
I suffix	– 40°C to 85°C
M suffix	– 55°C to 125°C
Storage temperature range, T_{stg}	– 65°C to 150°C
Case temperature for 60 seconds: FK package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or P package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 60seconds: JG package	300°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-} .
2. Differential voltages are at $IN+$ with respect to $IN-$.
3. The output may be shorted to either supply. Temperature and /or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING	$T_A = 125^\circ\text{C}$ POWER RATING
D	725 mW	5.8 mW/°C	464 mW	377 mW	145 mW
FK	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
JG	1050 mW	8.4 mW/°C	672 mW	546 mW	210 mW
P	1000 mW	8.0 mW/°C	640 mW	520 mW	200 mW

recommended operating conditions

		C SUFFIX		I SUFFIX		M SUFFIX		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
Supply voltage, $V_{CC\pm}$		±3.5	±18	±3.5	±18	+3.5	±18	V
Common-mode input voltage, V_{IC}	$V_{CC\pm} \pm 5\text{ V}$	–1.6	4	–1.6	4	–1.6	4	V
	$V_{CC\pm} \pm 15\text{ V}$	–11	13	–11	13	–11	13	
Operating free-air temperature, T_A		0	70	–40	85	–55	125	°C

TLE2161, TLE2161A, TLE2161B

EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE

μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm \pm 5 \text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161C, TLE2161AC TLE2161BC			UNIT
				MIN	TYP	MAX	
V _{IO} Input offset voltage	TLE2161C	V _{IC} = 0, R _S = 50 Ω	25°C	0.8		3.1	mV
	TLE2161AC		Full range	4			
			25°C	0.6		2.6	
			Full range	3.5			
			25°C	0.5		1.9	
	TLE2161BC		Full range	2.4			
α _{VIO} Temperature coefficient of input offset voltage			Full range	6		μV/°C	
Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo	
I _{IO} Input offset current			25°C	1		pA	
I _{IB} Input bias current			Full range	0.8		nA	
		25°C	3		pA		
V _{ICR} Common-mode input voltage range		Full range	2		nA		
		25°C	–1.6 to 4	–2 to 6	V		
V _{OM} + Maximum positive peak output voltage swing	R _L = 10 kΩ	Full range	–1.6 to 4			V	
		25°C	3.5	3.7	V		
	R _L = 100 Ω	Full range	3.3				
		25°C	2.5	3.1			
V _{OM} – Maximum negative peak output voltage swing	R _L = 10 kΩ	Full range	2			V	
		25°C	–3.7	–3.9			
	R _L = 100 Ω	Full range	–3.3				
		25°C	–2.5	–2.7			
A _{VD} Large-signal differential voltage amplification	V _O = ±2.8 V, R _L = 10 kΩ	Full range	–2			V/mV	
		25°C	15	80			
	V _O = 0 to 2 V, R _L = 100 Ω	Full range	2				
		25°C	0.75	45			
	V _O = 0 to –2 V, R _L = 100 Ω	Full range	0.5				
		25°C	0.5	3			
r _i Input resistance		Full range	0.25				
c _i Input capacitance		25°C	10 ¹²		Ω		
z _O Open-loop output impedance	I _O = 0	25°C	4		pF		
CMRR Common-mode rejection ratio	V _{IC} =V _{ICRmin} , R _S = 50 Ω	25°C	280		Ω		
		Full range	65		82	dB	
k _{SVR} Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±5 V to ±15 V, R _S = 50 Ω	Full range	65		dB		
		25°C	75	93			
I _{CC} Supply current	V _O = 0, No load	Full range	75		μA		
ΔI _{CC} Supply-current change over operating temperature range		25°C	280			325	
		Full range	350				
		Full range	29		μA		

† Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature, $V_{CC} \pm = \pm 5$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^\dagger$	TLE2161C, TLE2161AC TLE2161BC			UNIT
				MIN	TYP	MAX	
SR	Slew rate (see Figure 1)	$A_{VD} = 5$, $R_L = 10$ k Ω , $C_L = 100$ pF	25°C	7	10		V/ μ s
			Full range	5			
V_n	Equivalent input noise voltage (see Figure 2)	$R_S = 20$ Ω , $f = 10$ Hz	25°C		59	100	nV/ $\sqrt{\text{Hz}}$
		$R_S = 20$ Ω , $f = 1$ kHz			43	60	
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1$ Hz to 10 Hz	25°C		1.1		μ V
I_n	Equivalent input noise current	$f = 1$ kHz	25°C		1		fA/ $\sqrt{\text{Hz}}$
THD	Total harmonic distortion	$V_{O(PP)} = 2$ V, $A_{VD} = 5$, $R_L = 10$ k Ω , $f = 10$ kHz,	25°C		0.025%		
	Gain-bandwidth product (see Figure 3)	$f = 100$ kHz, $R_L = 10$ k Ω , $C_L = 100$ pF	25°C		5.8		MHz
		$f = 100$ kHz, $R_L = 100$ k Ω , $C_L = 100$ pF			4.3		
t_s	Settling time	$\epsilon = 0.1\%$	25°C		5		μ s
		$\epsilon = 0.01\%$			10		
B_{OM}	Maximum output-swing bandwidth	$A_{VD} = 5$, $R_L = 10$ k Ω	25°C		420		kHz
ϕ_m	Phase margin (see Figure 3)	$A_{VD} = 5$, $R_L = 10$ k Ω , $C_L = 100$ pF	25°C		70°		
		$A_{VD} = 5$, $R_L = 100$ Ω , $C_L = 100$ pF			84°		

† Full range is 0°C to 70°C.

TLE2161, TLE2161A, TLE2161B

EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE

μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm \pm 15\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161C, TLE2161AC TLE2161BC			UNIT
				MIN	TYP	MAX	
V _{IO} Input offset voltage	TLE2161C	V _{IC} = 0, R _S = 50 Ω	25°C	0.6		3	mV
	TLE2161AC		Full range	3.9			
			25°C	0.5		1.5	
			Full range	2.5			
			25°C	0.3		0.5	
	TLE2161BC		Full range	1			
αV _{IO} Temperature coefficient of input offset voltage	Full range		6		μV/°C		
Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo	
I _{IO} Input offset current			25°C	2		pA	
			Full range	1		nA	
I _{IB} Input bias current		25°C	4		pA		
		Full range	3		nA		
V _{ICR} Common-mode input voltage range		25°C	–11 to 13	–12 to 16	V		
		Full range	–11 to 13		V		
V _{OM} + Maximum positive peak output voltage swing	R _L = 10 kΩ	25°C	13.2	13.7	V		
		Full range	13				
	R _L = 600 Ω	25°C	12.5	13.2			
		Full range	12				
V _{OM} – Maximum negative peak output voltage swing	R _L = 10 kΩ	25°C	–13.2	–13.7	V		
		Full range	–13				
	R _L = 600 Ω	25°C	–12.5	–13			
		Full range	–12				
A _{VD} Large-signal differential voltage amplification	V _O = ±10 V, R _L = 10 kΩ	25°C	30	230	V/mV		
		Full range	20				
	V _O = 0 to 8 V, R _L = 600 Ω	25°C	25	100			
		Full range	10				
	V _O = 0 to –8 V, R _L = 600 Ω	25°C	3	25			
		Full range	1				
r _i Input resistance		25°C	10 ¹²		Ω		
c _i Input capacitance		25°C	4		pF		
z _o Open-loop output impedance	I _O = 0	25°C	280		Ω		
CMRR Common-mode rejection ratio	V _{IC} = V _{ICRmin} , R _S = 50 Ω	25°C	72	90	dB		
		Full range	70				
k _{SVR} Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±5 V to ±15 V, R _S = 50 Ω	25°C	75	93	dB		
		Full range	75				
I _{CC} Supply current	V _O = 0, No load	25°C	290	350	μA		
		Full range	375				
ΔI _{CC} Supply-current change over operating temperature range			Full range	34		μA	

[†] Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.



TLE2161, TLE2161A, TLE2161B
EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE
μPOWER OPERATIONAL AMPLIFIERS
 SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

operating characteristics at specified free-air temperature, $V_{CC\pm} = \pm 15$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^\dagger$	TLE2161C, TLE2161AC TLE2161BC			UNIT
				MIN	TYP	MAX	
SR	Slew rate (see Figure 1)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C	7	10		V/ μ s
			Full range	5			
V_n	Equivalent input noise voltage (see Figure 2)	$R_S = 20\text{ }\Omega$, $f = 10\text{ Hz}$	25°C		70	100	nV/ $\sqrt{\text{Hz}}$
		$R_S = 20\text{ }\Omega$, $f = 1\text{ kHz}$			40	60	
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }10\text{ Hz}$	25°C		1.1		μ V
I_n	Equivalent input noise current	$f = 1\text{ kHz}$	25°C		1.1		fA/ $\sqrt{\text{Hz}}$
THD	Total harmonic distortion	$V_{O(PP)} = 2\text{ V}$, $A_{VD} = 5$, $f = 10\text{ kHz}$, $R_L = 10\text{ k}\Omega$	25°C		0.025%		
	Gain-bandwidth product (see Figure 3)	$f = 100\text{ kHz}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		6.4		MHz
		$f = 100\text{ kHz}$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			5.6		
t_s	Settling time	$\epsilon = 0.1\%$	25°C		5		μ s
		$\epsilon = 0.01\%$			10		
BOM	Maximum output-swing bandwidth	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$	25°C		116		kHz
ϕ_m	Phase margin (see Figure 3)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		72°		
		$A_{VD} = 5$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			78°		

[†] Full range is 0°C to 70°C.

TLE2161, TLE2161A, TLE2161B
EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE
μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm = \pm 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161I, TLE2161AI TLE2161BI			UNIT
				MIN	TYP	MAX	
V _{IO}	Input offset voltage	V _{IC} = 0, R _S = 50 Ω	25°C	0.8		3.1	mV
			Full range	4.4			
			25°C	0.6		2.6	
			Full range	3.9			
			25°C	0.5		1.9	
			Full range	2.7			
αV _{IO}	Temperature coefficient of input offset voltage	V _{IC} = 0, R _S = 50 Ω	Full range	6		μV/°C	
Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo	
I _{IO}	Input offset current		25°C	1		pA	
			Full range	2		nA	
I _{IB}	Input bias current		25°C	3		pA	
			Full range	4		nA	
V _{ICR}	Common-mode input voltage range		25°C	−1.6 to 4	−2 to 6	V	
			Full range	−1.6 to 4			
V _{OM} +	Maximum positive peak output voltage	R _L = 10 kΩ	25°C	3.5	3.7	V	
			Full range	3.1			
		R _L = 100 Ω	25°C	2.5	3.1		
			Full range	2			
V _{OM} −	Maximum negative peak output voltage swing	R _L = 10 kΩ	25°C	−3.7	−3.9	V	
			Full range	−3.1			
		R _L = 100 Ω	25°C	−2.5	−2.7		
			Full range	−2			
A _{VD}	Large-signal differential voltage amplification	V _O = ±2.8 V, R _L = 10 kΩ	25°C	15	80	V/mV	
			Full range	2			
		V _O = 0 to 2 V, R _L = 100 Ω	25°C	0.75	45		
			Full range	0.5			
		V _O = 0 to −2 V, R _L = 100 Ω	25°C	0.5	3		
			Full range	0.25			
r _i	Input resistance		25°C	10 ¹²		Ω	
c _i	Input capacitance		25°C	4		pF	
z _O	Open-loop output impedance	I _O = 0	25°C	280		Ω	
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin} , R _S = 50 Ω	25°C	65	82	dB	
			Full range	65			
k _{SVR}	Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±5 V to ± 15 V, R _S = 50 Ω	25°C	75	93	dB	
			Full range	65			
I _{CC}	Supply current	V _O = 0, No load	25°C	280	325	μA	
			Full range	350			
ΔI _{CC}	Supply-current change over operating temperature range			Full range	29		μA

[†] Full range is –40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature, $V_{CC} \pm = \pm 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^\dagger$	TLE2161, TLE2161AI TLE2161BI			UNIT
				MIN	TYP	MAX	
SR	Slew rate (see Figure 1)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C	7	10		V/ μs
			Full range	5			
V_n	Equivalent input noise voltage (see Figure 2)	$R_S = 20\text{ }\Omega$, $f = 10\text{ Hz}$	25°C		59	100	nV/ $\sqrt{\text{Hz}}$
		$R_S = 20\text{ }\Omega$, $f = 1\text{ kHz}$			43	60	
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }10\text{ Hz}$	25°C		1.1		μV
I_n	Equivalent input noise current	$f = 1\text{ kHz}$	25°C		1		fA/ $\sqrt{\text{Hz}}$
THD	Total harmonic distortion	$V_{O(PP)} = 2\text{ V}$, $R_L = 10\text{ k}\Omega$, $A_{VD} = 5$, $f = 10\text{ kHz}$	25°C		0.025%		
	Gain-bandwidth product (see Figure 3)	$f = 100\text{ kHz}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		5.8		MHz
		$f = 100\text{ kHz}$, $R_L = 100\text{ }\Omega$, $C_L = 100\text{ pF}$			4.3		
t_s	Settling time	$\epsilon = 0.1\%$	25°C		5		μs
		$\epsilon = 0.01\%$			10		
B_{OM}	Maximum output-swing bandwidth	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$	25°C		420		kHz
ϕ_m	Phase margin (see Figure 3)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		70°		
		$A_{VD} = 5$, $R_L = 100\text{ }\Omega$, $C_L = 100\text{ pF}$			84°		

[†] Full range is – 40°C to 85°C.

TLE2161, TLE2161A, TLE2161B
EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE
μPOWER OPERATIONAL AMPLIFIERS
SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm \pm 15$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161I, TLE2161AI TLE2161BI			UNIT	
				MIN	TYP	MAX		
V _{IO}	Input offset voltage	V _{IC} = 0, R _S = 50 Ω	25°C	0.6		3	mV	
			Full range	4.3				
			25°C	0.5		1.5		
			Full range	2.9				
				25°C	0.3		0.5	
				Full range	1.3			
α _{VIO}	Temperature coefficient of input offset voltage			Full range	6		μV/°C	
	Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo	
I _{IO}	Input offset current			25°C	2		pA	
				Full range	3		nA	
I _{IB}	Input bias current			25°C	4		pA	
				Full range	5		nA	
V _{ICR}	Common-mode input voltage range		25°C	–11 to 13	–12 to 16	V		
		Full range	–11 to 13		V			
V _{OM} +	Maximum positive peak output voltage swing	R _L = 10 kΩ	25°C	13.2	13.7	V		
			Full range	13				
		R _L = 600 Ω	25°C	12.5	13.2			
			Full range	12				
V _{OM} –	Maximum negative peak output voltage swing	R _L = 10 kΩ	25°C	–13.2	–13.7	V		
			Full range	–13				
		R _L = 600 Ω	25°C	–12.5	–13			
			Full range	–12				
A _{VD}	Large-signal differential voltage amplification	V _O = ±10 V, R _L = 10 kΩ	25°C	30	230	V/mV		
			Full range	20				
		V _O = 0 to 8 V, R _L = 600 Ω	25°C	25	100			
			Full range	10				
		V _O = 0 to – 8 V, R _L = 600 Ω	25°C	3	25			
			Full range	1				
r _i	Input resistance		25°C	10 ¹²		Ω		
c _i	Input capacitance		25°C	4		pF		
z _O	Open-loop output impedance	I _O = 0	25°C	280		Ω		
CMRR	Common-mode rejection ratio	V _{IC} =V _{ICRmin} , R _S = 50 Ω	25°C	72	90	dB		
			Full range	65				
k _{SVR}	Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±5 V to ±15 V, R _S = 50 Ω	25°C	75	93	dB		
			Full range	65				
I _{CC}	Supply current	V _O = 0, No load	25°C	290	350	μA		
			Full range	375				
ΔI _{CC}	Supply-current change over operating temperature range			Full range	34		μA	

† Full range is –40°C to 85°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ C$ extrapolated to $T_A = 25^\circ C$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.



operating characteristics at specified free-air temperature, $V_{CC} \pm = \pm 15$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^\dagger$	TLE2161, TLE2161A TLE2161B			UNIT
				MIN	TYP	MAX	
SR	Slew rate (see Figure 1)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C	7	10		V/ μ s
			Full range	5			
V_n	Equivalent input noise voltage (see Figure 2)	$R_S = 20\text{ }\Omega$, $f = 10\text{ Hz}$	25°C		70	100	nV/ $\sqrt{\text{Hz}}$
		$R_S = 20\text{ }\Omega$, $f = 1\text{ kHz}$			40	60	
$V_{n(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }10\text{ Hz}$	25°C		1.1		μ V
I_n	Equivalent input noise current	$f = 1\text{ kHz}$	25°C		1.1		fA/ $\sqrt{\text{Hz}}$
THD	Total harmonic distortion	$V_{O(PP)} = 2\text{ V}$, $A_{VD} = 5$, $f = 10\text{ kHz}$, $R_L = 10\text{ k}\Omega$	25°C		0.025%		
	Gain-bandwidth product (see Figure 3)	$f = 100\text{ kHz}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		6.4		MHz
		$f = 100\text{ kHz}$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			5.6		
t_s	Settling time	$\epsilon = 0.1\%$	25°C		5		μ s
		$\epsilon = 0.01\%$			10		
B_{OM}	Maximum output-swing bandwidth	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$	25°C		116		kHz
ϕ_m	Phase margin (see Figure 3)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		72°		
		$A_{VD} = 5$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			78°		

[†] Full range is – 40°C to 85°C.

TLE2161, TLE2161A, TLE2161B
EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE
μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm \pm 5\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161M TLE2161AM TLE2161BM		UNIT	
				MIN	TYP		MAX
V _{IO}	Input offset voltage	TLE2161M	25°C	0.8	3.1	mV	
			Full range	6			
			TLE2161AM	25°C	0.6		2.6
				Full range	4.6		
			TLE2161BM	25°C	0.5		1.9
				Full range	3.1		
αV _{IO}	Temperature coefficient of input offset voltage	V _{IC} = 0, R _S = 50 Ω	Full range	6		μV/°C	
Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo	
I _{IO}	Input offset current		25°C	1		pA	
			Full range	15		nA	
I _{IB}	Input bias current		25°C	3		pA	
			Full range	30		nA	
V _{ICR}	Common-mode input voltage range		25°C	−1.6 to 4	−2 to 6	V	
			Full range	−1.6 to 4		V	
V _{OM} +	Maximum positive peak output voltage swing	All packages	25°C	3.5	3.7	V	
			Full range	3			
		FK and JG packages	25°C	2.5	3.6	V	
			Full range	2			
		D and P packages	25°C	2.5	3.1		
			Full range	2			
V _{OM} −	Maximum negative peak output voltage swing	All packages	25°C	−3.7	−3.9	V	
			Full range	−3			
		FK and JG packages	25°C	−2.5	−3.5		
			Full range	−2			
		D and P packages	25°C	−2.5	−2.7		
			Full range	−2			
A _{VD}	Large-signal differential voltage amplification	All packages	25°C	15	80	V/mV	
			Full range	2			
		FK and JG packages	25°C	1	65		
			Full range	0.5			
			25°C	1	16		
			Full range	0.5			
		D and P packages	25°C	0.75	45		
			Full range	0.5			
			25°C	0.5	3		
			Full range	0.25			

† Full range is -55°C to 125°C .

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.



electrical characteristics at specified free-air temperature, $V_{CC} \pm = \pm 5$ V (unless otherwise noted continued)

PARAMETER	TEST CONDITIONS	$T_A^\dagger$	TLE2161M TLE2161AM TLE2161BM			UNIT
			MIN	TYP	MAX	
r_i Input resistance		25°C		10 ¹²		Ω
c_i Input capacitance		25°C		4		pF
z_o Open-loop output impedance	$I_O = 0$	25°C		280		Ω
CMRR Common-mode rejection ratio	$V_{IC} = V_{ICRmin}, R_S = 50 \Omega$	25°C	65	82		dB
		Full range	60			
k_{SVR} Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm} = \pm 5$ V to ± 15 V, $R_S = 50 \Omega$	25°C	75	93		dB
		Full range	65			
I_{CC} Supply current	$V_O = 0,$ No load	25°C		280	325	μA
		Full range			350	
ΔI_{CC} Supply-current change over operating temperature range		Full range		39		μA

[†] Full range is – 55°C to 125°C.

operating characteristics, $V_{CC} \pm = \pm 5$ V, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TLE2161M TLE2161AM TLE2161BM			UNIT
		MIN	TYP	MAX	
SR Slew rate (see Figure 1)	$A_{VD} = 5, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$		10		V/μs
V_n Equivalent input noise voltage (see Figure 2)	$R_S = 20 \Omega, f = 10 \text{ Hz}$		59		nV/√Hz
	$R_S = 20 \Omega, f = 1 \text{ kHz}$		43		
$V_{n(PP)}$ Peak-to-peak equivalent input noise voltage	$f = 0.1 \text{ Hz to } 10 \text{ Hz}$		1.1		μV
I_n Equivalent input noise current	$f = 1 \text{ kHz}$		1		fA/√Hz
THD Total harmonic distortion	$A_{VD} = 5, V_{O(PP)} = 2 \text{ V}, f = 10 \text{ kHz}, R_L = 10 \text{ k}\Omega$		0.025%		
Gain-bandwidth product (see Figure 3)	$f = 100 \text{ kHz}, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$		5.8		MHz
	$f = 100 \text{ kHz}, R_L = 600 \text{ k}\Omega, C_L = 100 \text{ pF}$		4.3		
t_s Settling time	$\epsilon = 0.1\%$		5		μs
	$\epsilon = 0.01\%$		10		
BOM Maximum output-swing bandwidth	$A_{VD} = 5, R_L = 10 \text{ k}\Omega$		420		kHz
ϕ_m Phase margin (see Figure 3)	$A_{VD} = 5, R_L = 10 \text{ k}\Omega, C_L = 100 \text{ pF}$		70°		
	$A_{VD} = 5, R_L = 600 \Omega, C_L = 100 \text{ pF}$		84°		

TLE2161, TLE2161A, TLE2161B
EXCALIBUR JFET-INPUT HIGH-OUTPUT-DRIVE
μPOWER OPERATIONAL AMPLIFIERS

SLOS049D – NOVEMBER 1989 – REVISED MAY 1996

electrical characteristics at specified free-air temperature, $V_{CC} \pm = \pm 15$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	T _A [†]	TLE2161M TLE2161AM TLE2161BM			UNIT	
				MIN	TYP	MAX		
V _{IO}	Input offset voltage	TLE2161M	25°C	0.6	3	mV		
			Full range	6				
			TLE2161AM	25°C	0.5		1.5	
				Full range	3.6			
				TLE2161BM	25°C		0.3	0.5
					Full range		1.7	
α _{VIO}	Temperature coefficient of input offset voltage	V _{IC} = 0, R _S = 50 Ω	Full range	6		μV/°C		
Input offset voltage long-term drift (see Note 4)			25°C	0.04		μV/mo		
I _{IO}	Input offset current		25°C	2		pA		
			Full range		20	nA		
I _{IB}	Input bias current		25°C	4		pA		
			Full range		40	nA		
V _{ICR}	Common-mode input voltage range		25°C	−11 to 13	−12 to 16	V		
			Full range	−11 to 13		V		
V _{OM} +	Maximum positive peak output voltage swing	R _L = 10 kΩ	25°C	13.2	13.7	V		
			Full range	12.5				
		R _L = 600 Ω	25°C	12.5	13.2			
			Full range	12				
V _{OM} −	Maximum negative peak output voltage swing	R _L = 10 kΩ	25°C	−13.2	−13.7	V		
			Full range	−12.5				
		R _L = 600 Ω	25°C	−12.5	−13			
			Full range	−12				
A _{VD}	Large-signal differential voltage amplification	V _O = ±10 V, R _L = 10 kΩ	25°C	30	230	V/mV		
			Full range	20				
		V _O = 0 to 8 V, R _L = 600 Ω	25°C	25	100			
			Full range	7				
		V _O = 0 to − 8 V, R _L = 600 Ω	25°C	3	25			
			Full range	1				
r _i	Input resistance		25°C	10 ¹²		Ω		
c _i	Input capacitance		25°C	4		pF		
z _o	Open-loop output impedance	I _O = 0	25°C	280		Ω		
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin} , R _S = 50 Ω	25°C	72	90	dB		
			Full range	65				
k _{SVR}	Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±5 V to ±15 V, R _S = 50 Ω	25°C	75	93	dB		
			Full range	65				
I _{CC}	Supply current	V _O = 0, No load	25°C	290	350	μA		
			Full range	375				
ΔI _{CC}	Supply-current change over operating temperature range			Full range	46		μA	

[†] Full range is –55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at $T_A = 150^\circ\text{C}$ extrapolated to $T_A = 25^\circ\text{C}$ using the Arrhenius equation and assuming an activation energy of 0.96 eV.




operating characteristics at specified free-air temperature, $V_{CC} \pm \pm 15$ V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	$T_A^\dagger$	TLE2161M TLE2161AM TLE2161BM			UNIT
				MIN	TYP	MAX	
SR	Slew rate (see Figure 1)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C	7	10		V/ μ s
			Full range	5			
V_n	Equivalent input noise voltage (see Figure 2)	$R_S = 20\text{ }\Omega$, $f = 10\text{ Hz}$	25°C		70		nV/ $\sqrt{\text{Hz}}$
		$R_S = 20\text{ }\Omega$, $f = 1\text{ kHz}$			40		
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage	$f = 0.1\text{ Hz to }10\text{ Hz}$	25°C		1.1		μ V
I_n	Equivalent input noise current	$f = 1\text{ Hz}$	25°C		1.1		fA/ $\sqrt{\text{Hz}}$
THD	Total harmonic distortion	$V_{O(PP)} = 2\text{ V}$, $A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $f = 10\text{ kHz}$	25°C		0.025%		
	Gain-bandwidth product (see Figure 3)	$f = 100\text{ kHz}$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		6.4		MHz
		$f = 100\text{ kHz}$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			5.6		
t_s	Settling time	$\epsilon = 0.1\%$	25°C		5		μ s
		$\epsilon = 0.01\%$			10		
B_{OM}	Maximum output-swing bandwidth	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$	25°C		116		kHz
ϕ_m	Phase margin (see Figure 3)	$A_{VD} = 5$, $R_L = 10\text{ k}\Omega$, $C_L = 100\text{ pF}$	25°C		72°		
		$A_{VD} = 5$, $R_L = 600\text{ }\Omega$, $C_L = 100\text{ pF}$			78°		

[†] Full range is – 55°C to 125°C.

PARAMETER MEASUREMENT INFORMATION

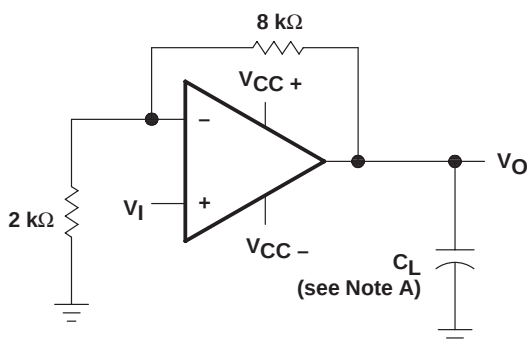

NOTE A: C_L includes fixture capacitance.

Figure 1. Slew-Rate Test Circuit


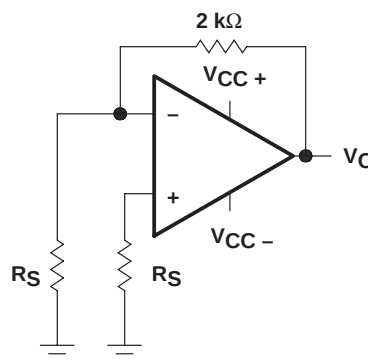


Figure 2. Noise-Voltage Test Circuit

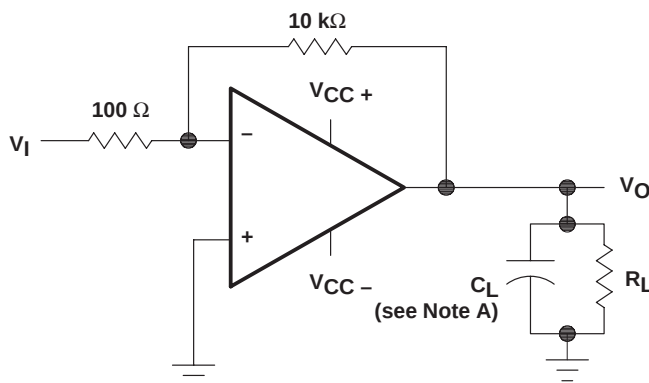

NOTE A: C_L includes fixture capacitance.

Figure 3. Gain-Bandwidth Product and Phase-Margin Test Circuit

typical values

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

Input bias and offset current

At the picoampere bias-current level typical of the TLE2161, TLE2161A, and TLE2161B, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test socket leakages can easily exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted into the socket, and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements are then subtracted algebraically to determine the bias current of the device.

TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
V_{IO}	Input offset voltage	Distribution	4
I_{IB}	Input bias current	vs Common-mode input voltage vs Free-air temperature	5 6
I_{IO}	Input offset current	vs Free-air temperature	6
V_{ICR}	Common-mode input voltage range limits	vs Free-air temperature	7
V_{OM}	Maximum positive peak output voltage	vs Output current	8
V_{OM}	Maximum negative peak output voltage	vs Output current	9
V_{OM}	Maximum peak output voltage	vs Supply voltage	10, 11, 12
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	13, 14, 15
A_{VD}	Large-signal differential voltage amplification	vs Frequency vs Free-air temperature	16 17
I_{OS}	Short-circuit output current	vs Elapsed time	18
	Large-signal voltage amplification	vs Free-air temperature	19
z_o	Output impedance	vs Frequency	20
CMRR	Common-mode rejection ratio	vs Frequency	21
I_{CC}	Supply current	vs Supply voltage vs Free-air temperature	22 23
	Pulse response	Small signal Large signal	24, 25 26, 27
	Noise voltage (referred to input)	0.1 to 10 Hz	28
V_n	Equivalent input noise voltage	vs Frequency	29
THD	Total harmonic distortion	vs Frequency	30, 31
	Gain-bandwidth product	vs Supply voltage vs Free-air temperature	32 33
ϕ_m	Phase margin	vs Supply voltage vs Free-air temperature	34 35
	Phase shift	vs Frequency	16

TYPICAL CHARACTERISTICS†

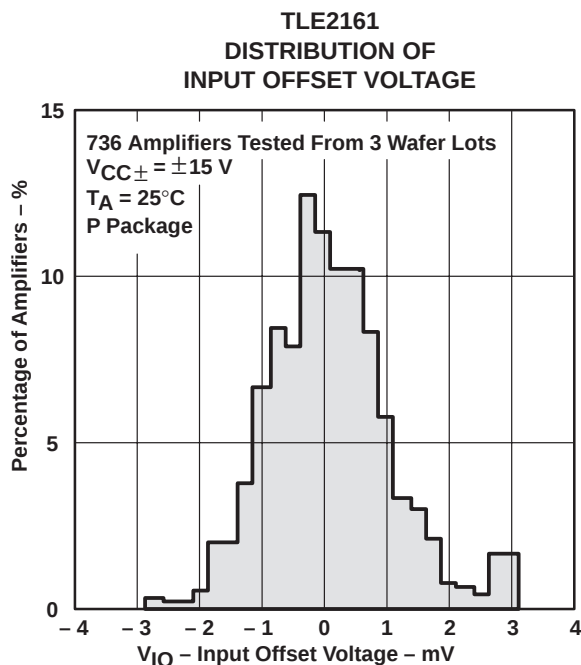


Figure 4

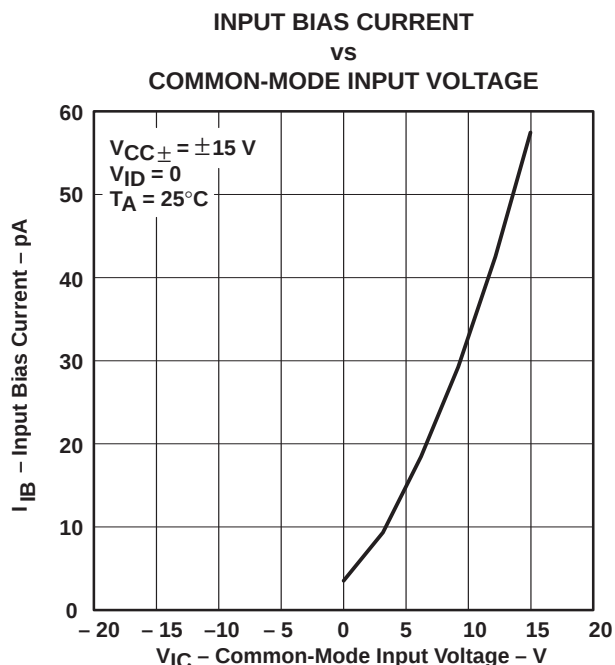


Figure 5

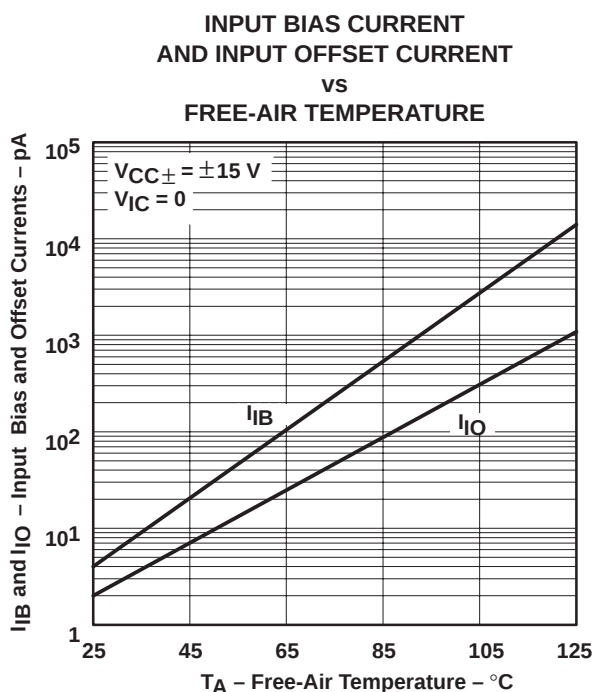


Figure 6

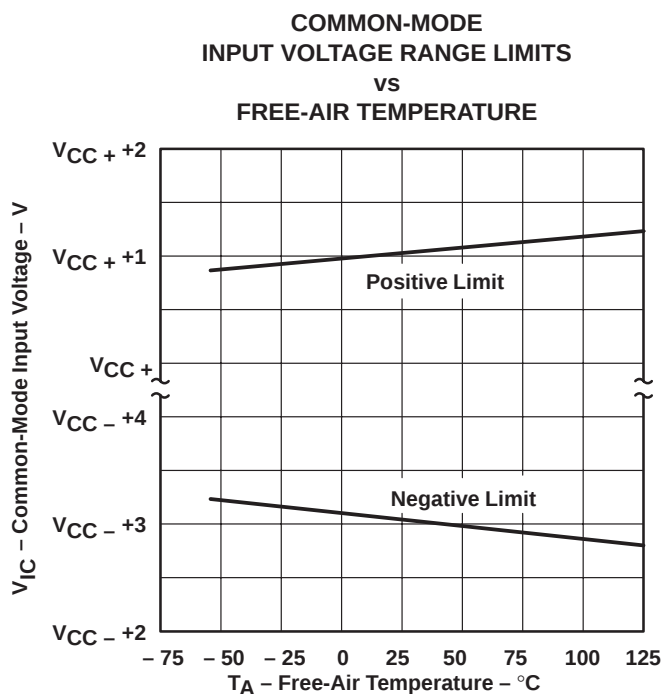


Figure 7

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

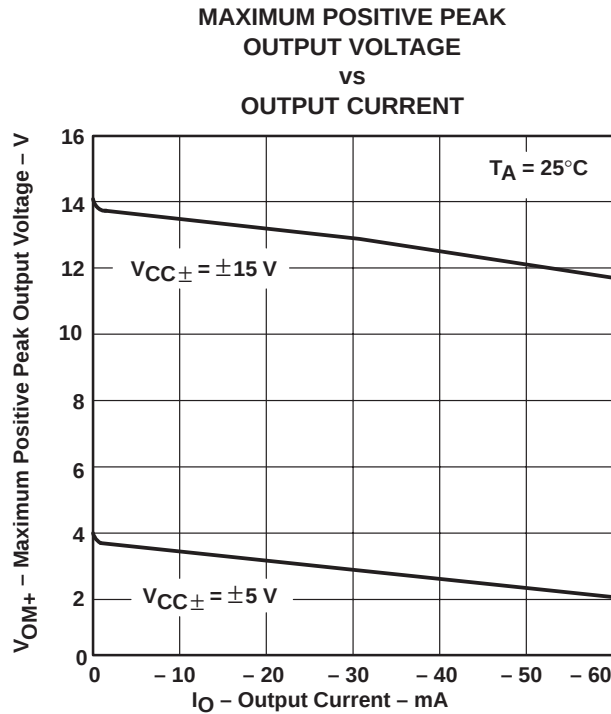


Figure 8

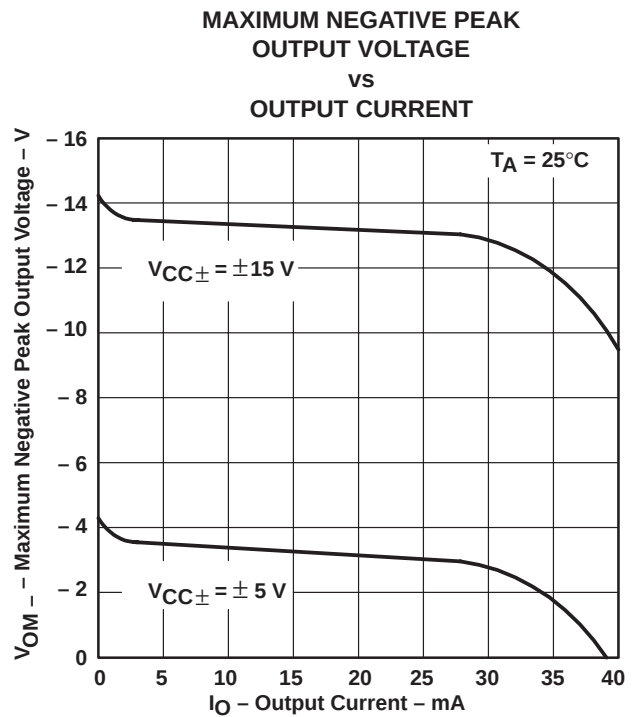


Figure 9

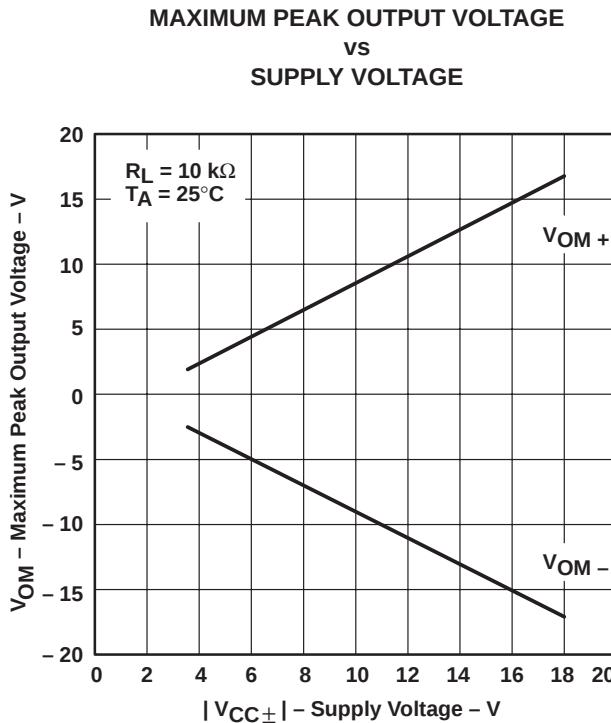


Figure 10

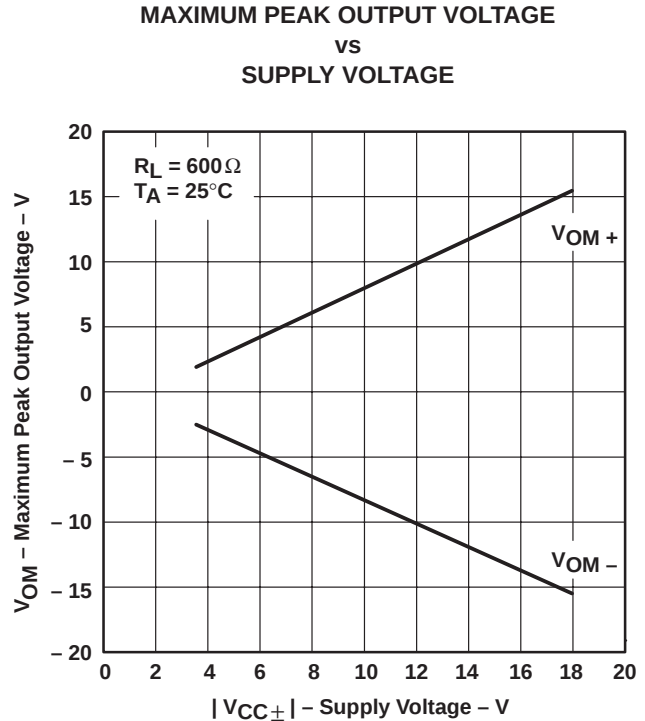


Figure 11

TYPICAL CHARACTERISTICS

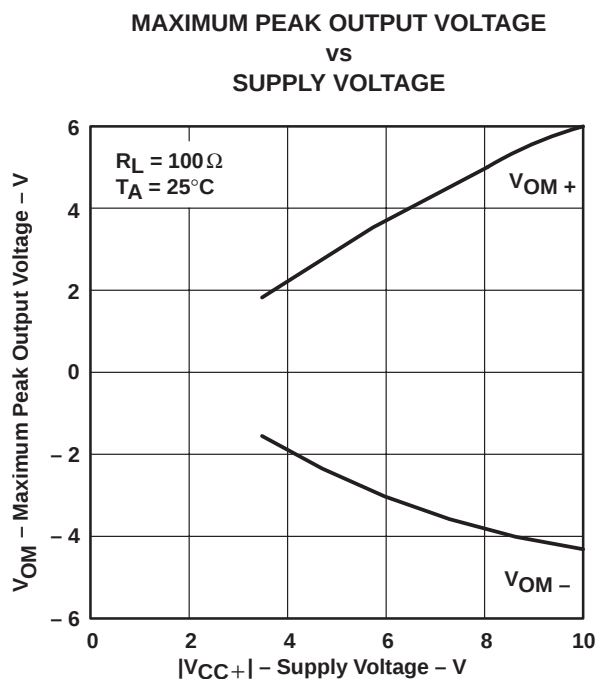


Figure 12

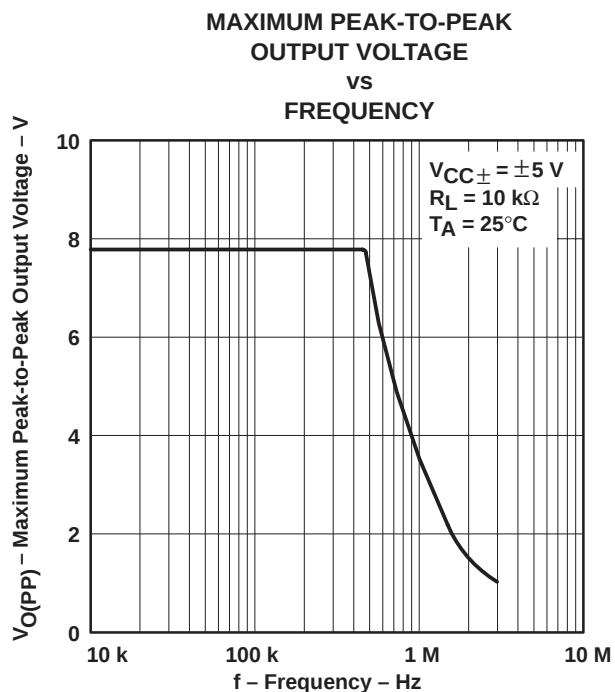


Figure 13

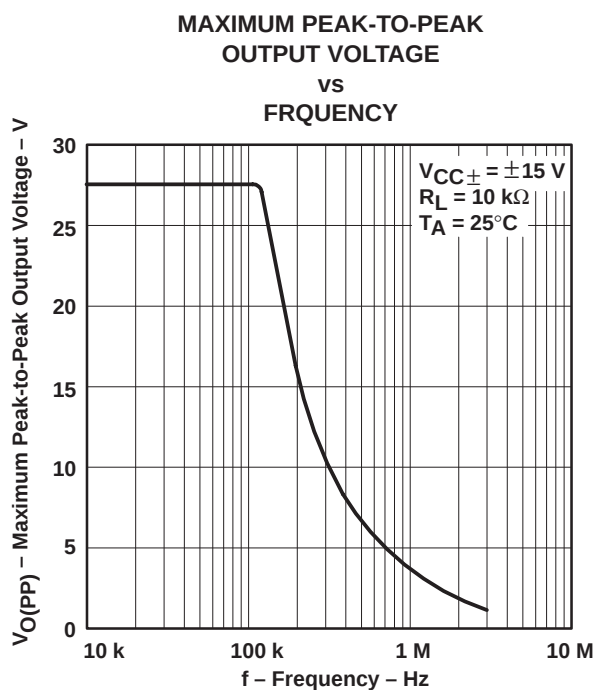


Figure 14

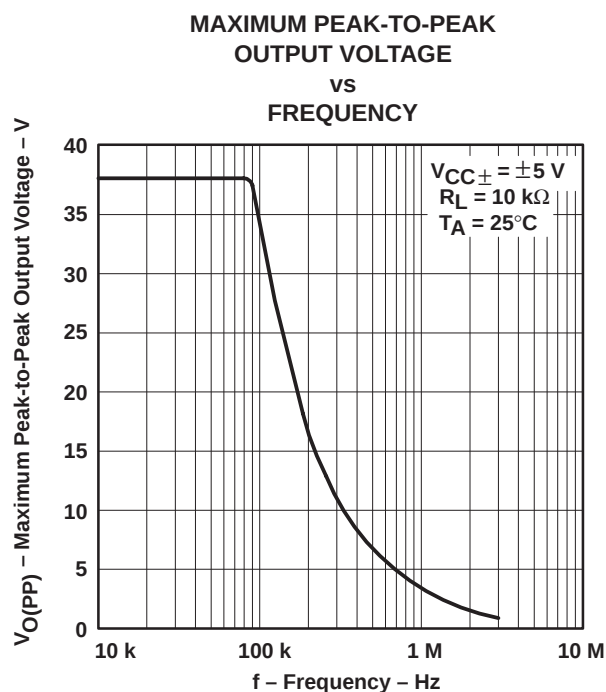


Figure 15

TYPICAL CHARACTERISTICS†

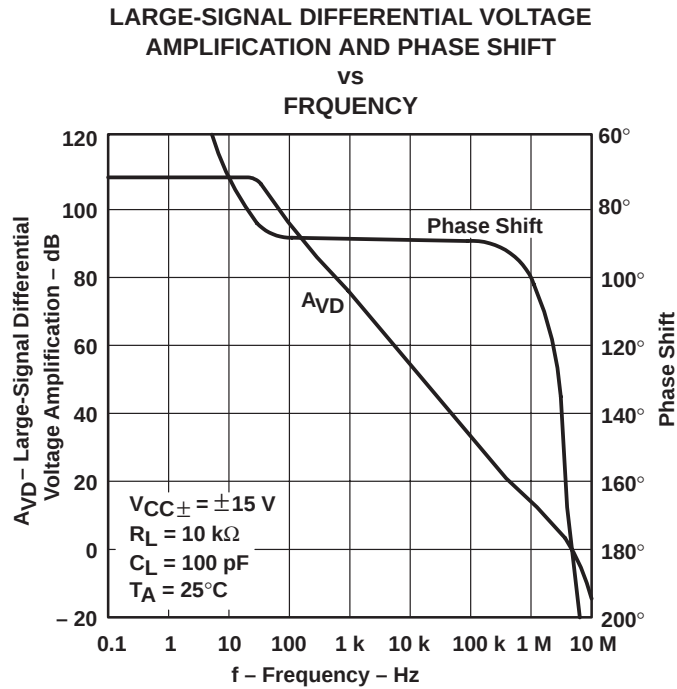


Figure 16

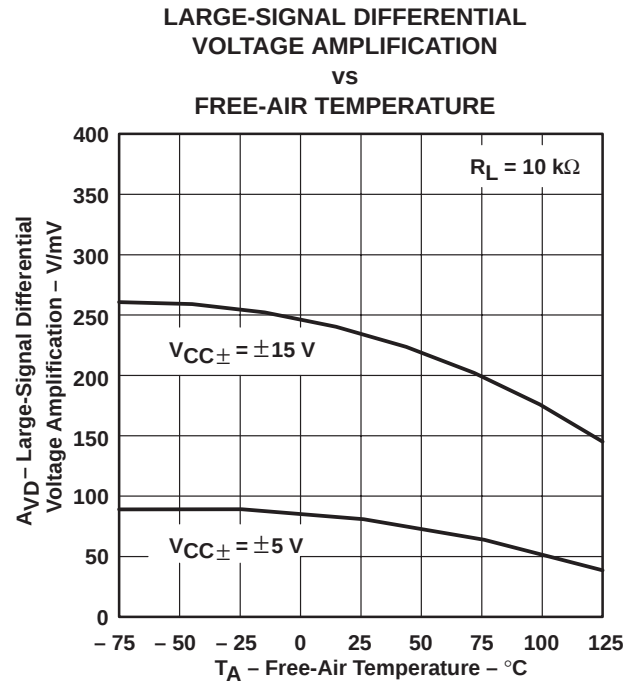


Figure 17

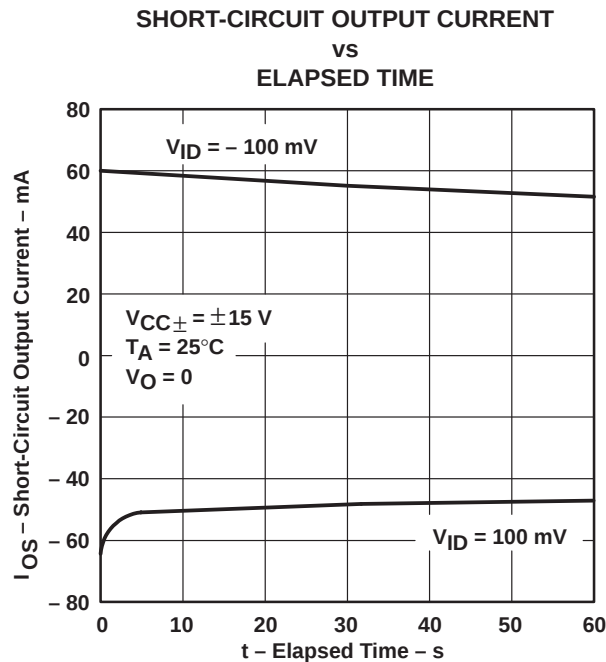


Figure 18





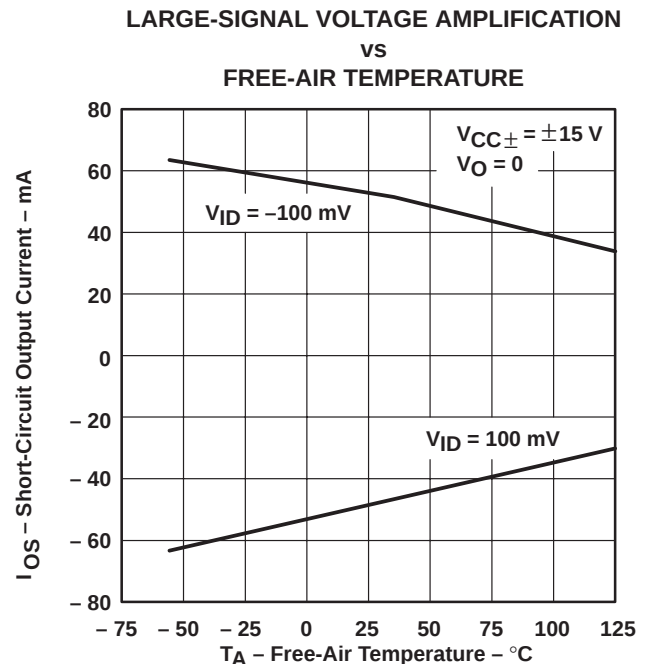


Figure 19

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS†

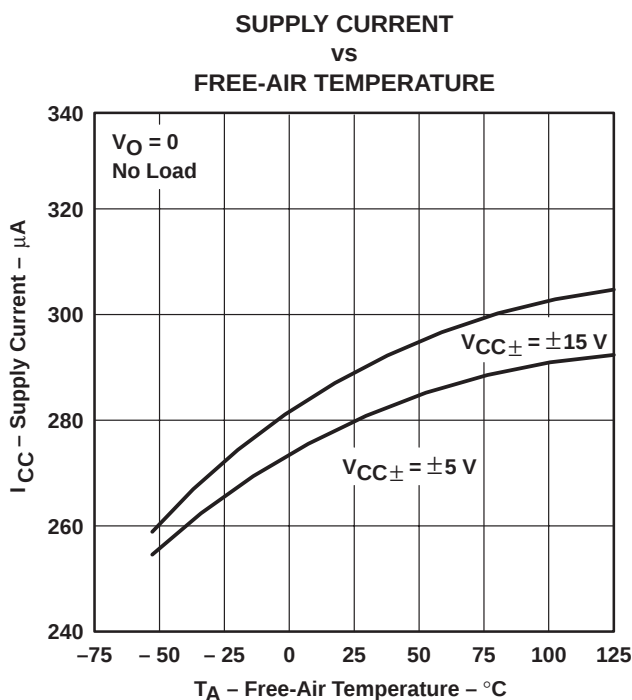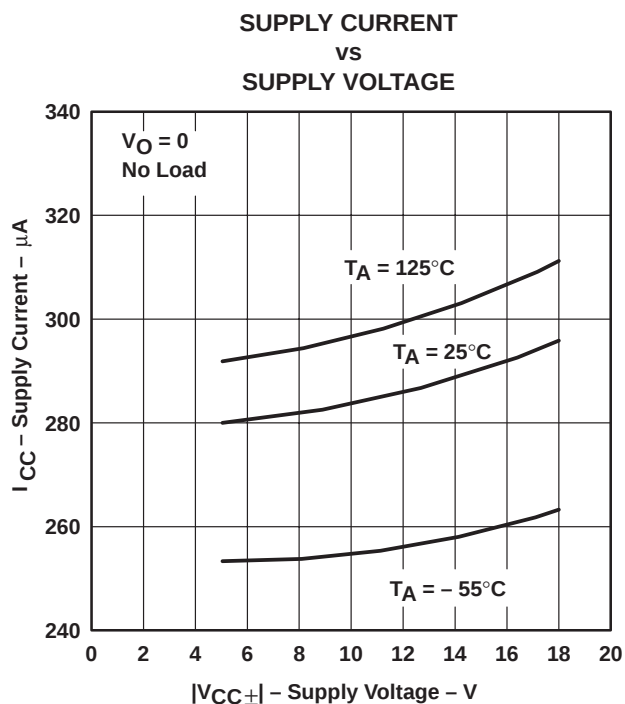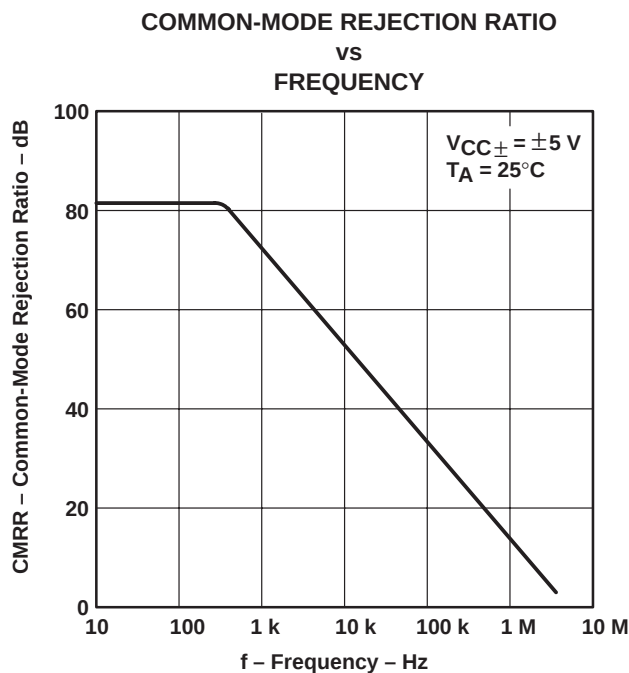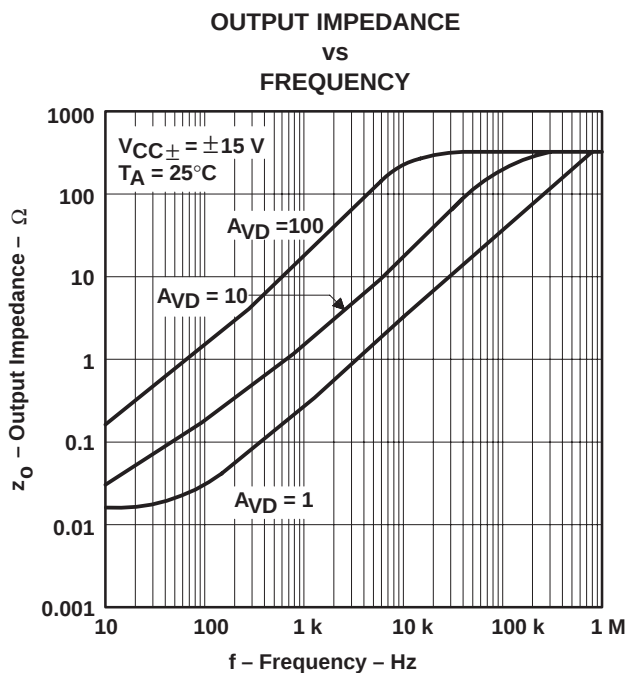

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

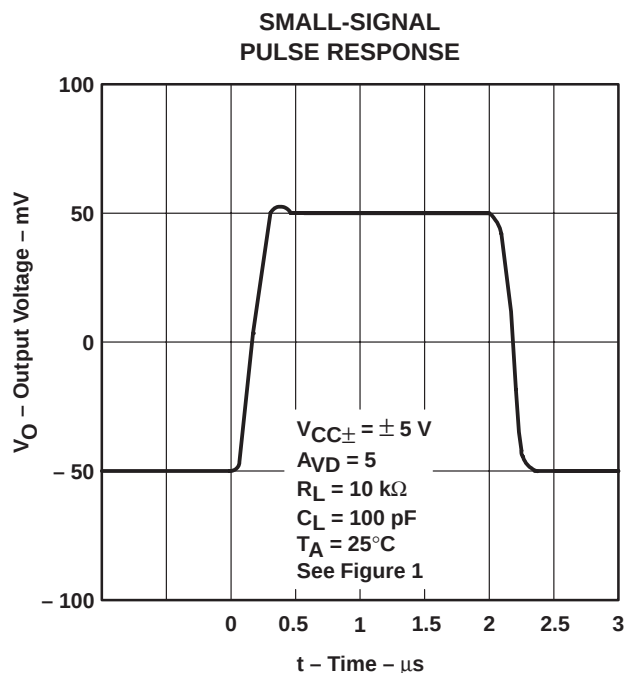


Figure 24

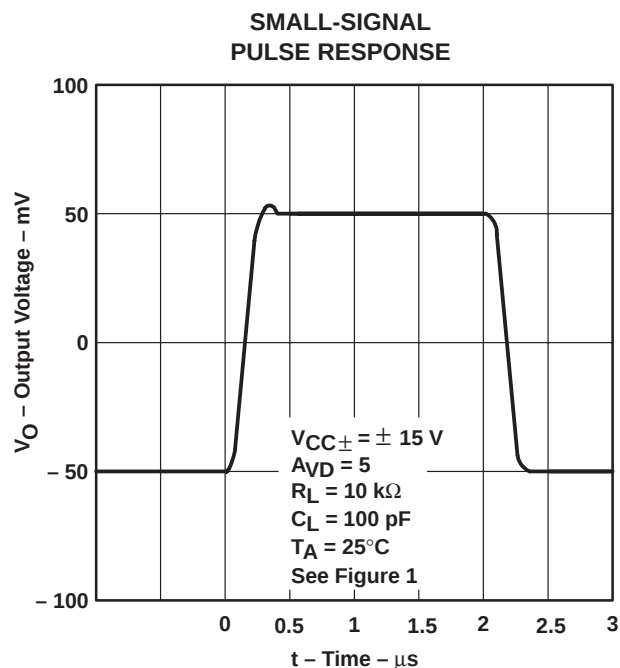


Figure 25

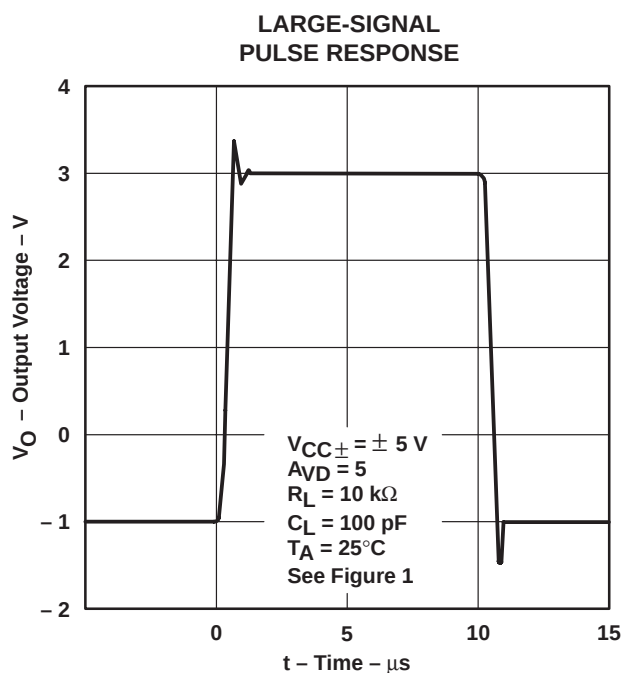


Figure 26

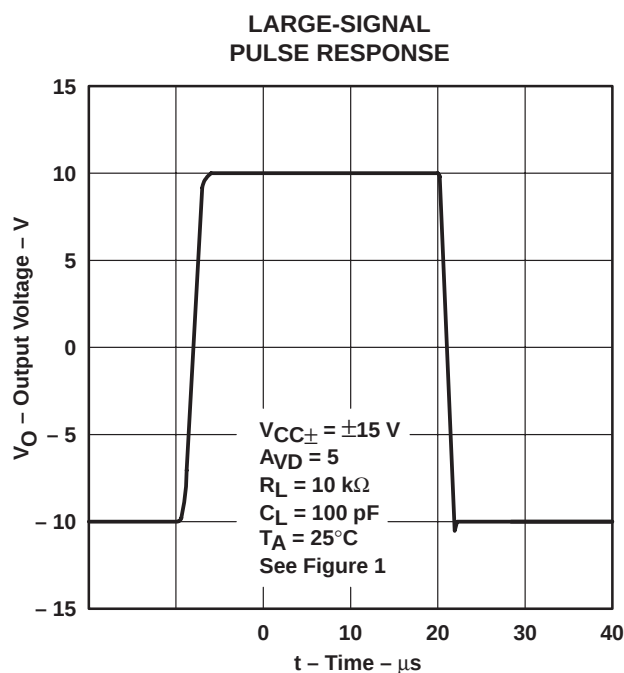


Figure 27

TYPICAL CHARACTERISTICS

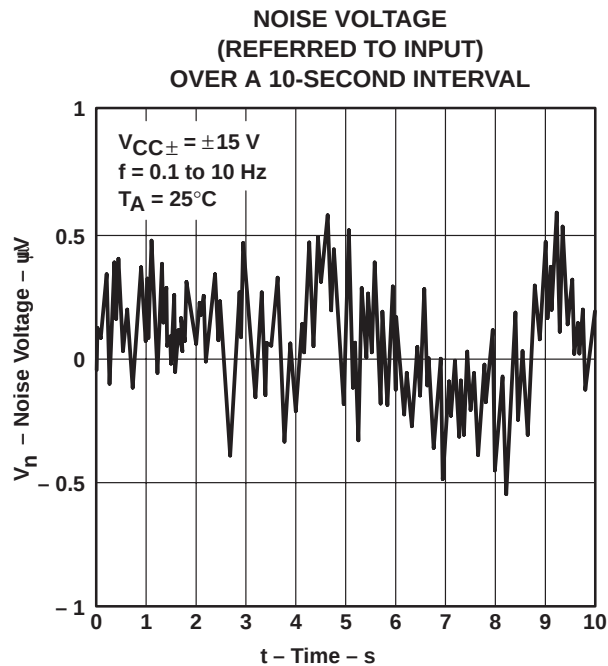


Figure 28

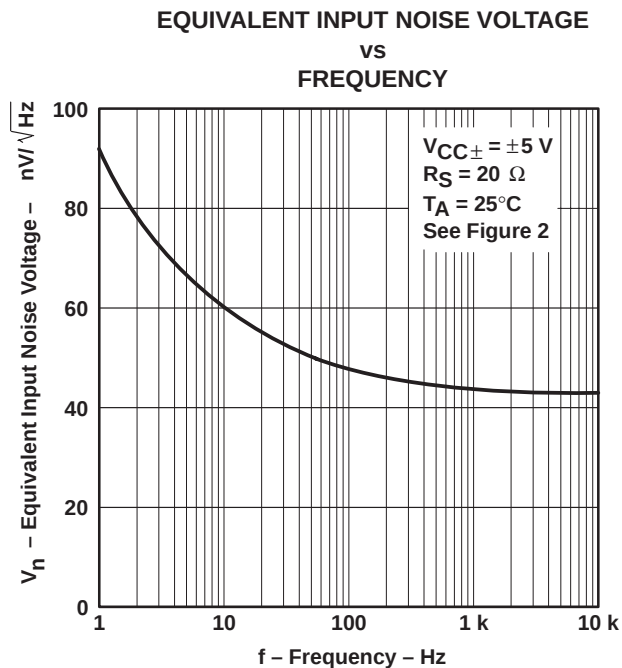


Figure 29

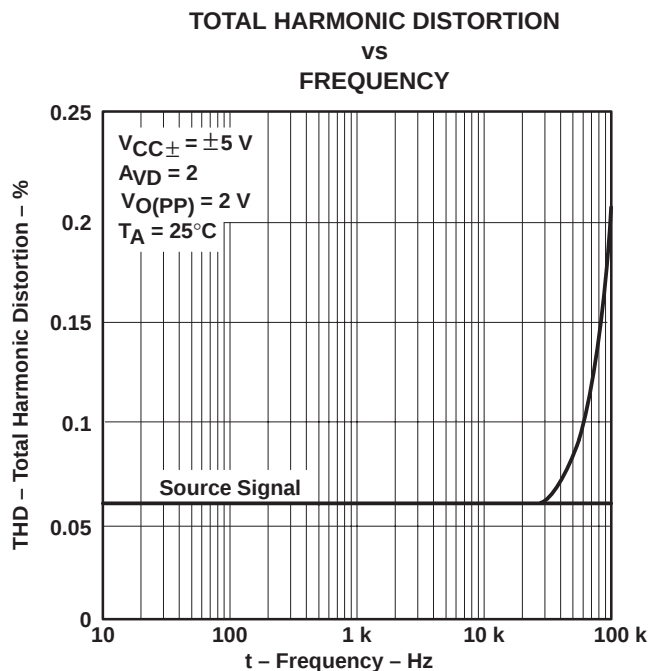


Figure 30

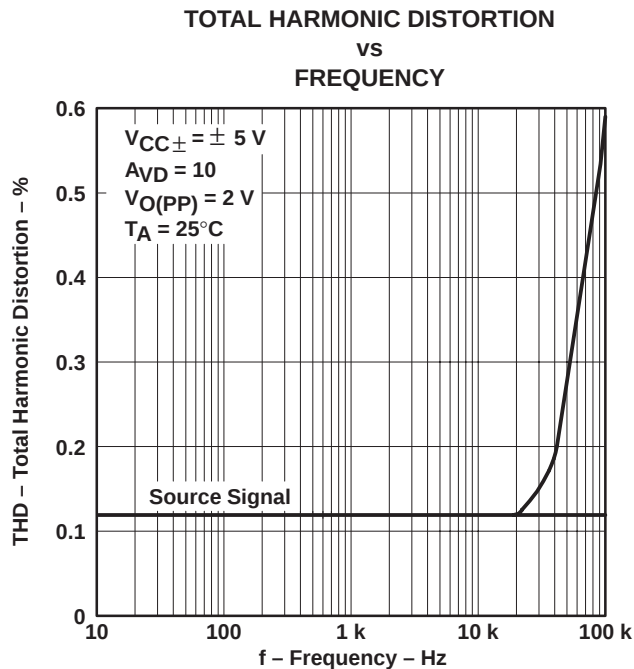


Figure 31

TYPICAL CHARACTERISTICS

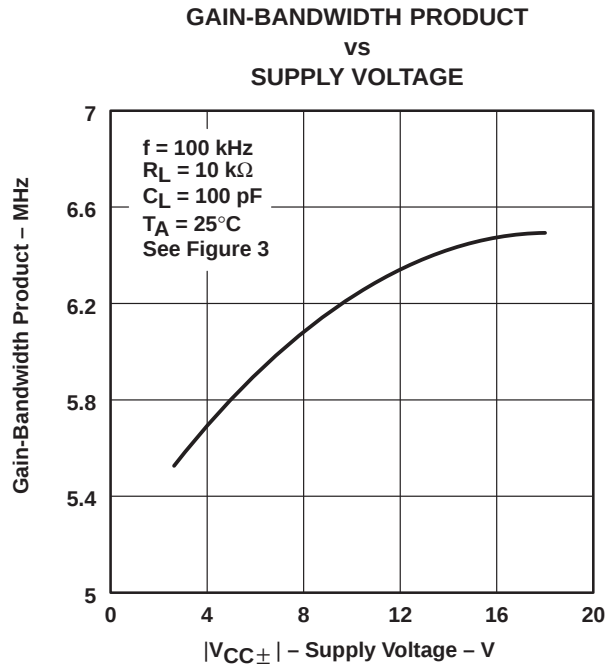


Figure 32

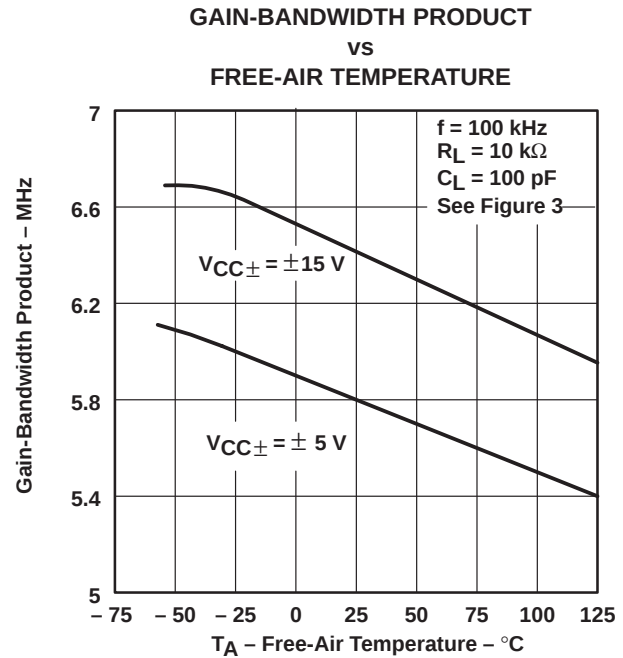


Figure 33

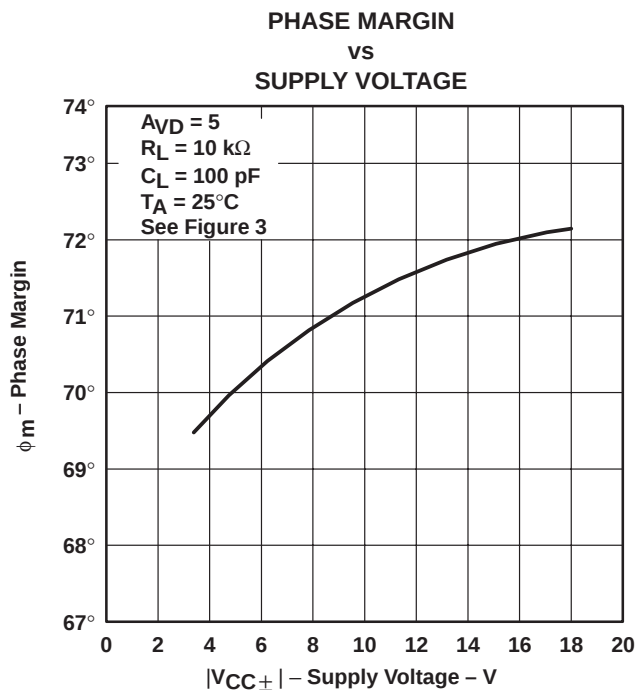


Figure 34

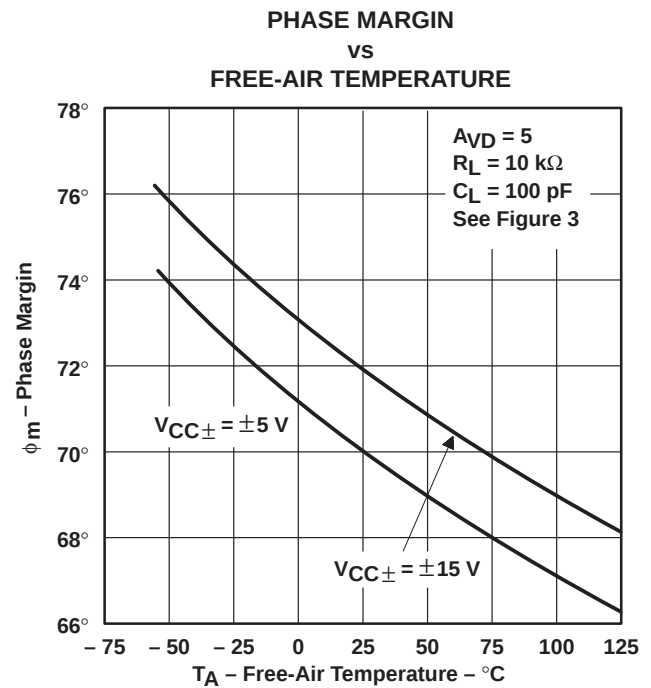


Figure 35

APPLICATION INFORMATION

macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 5) and subcircuit in Figure 36 and Figure 37 were generated using the TLE2161 typical electrical and operating characteristics at 25°C. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Gain-bandwidth product
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

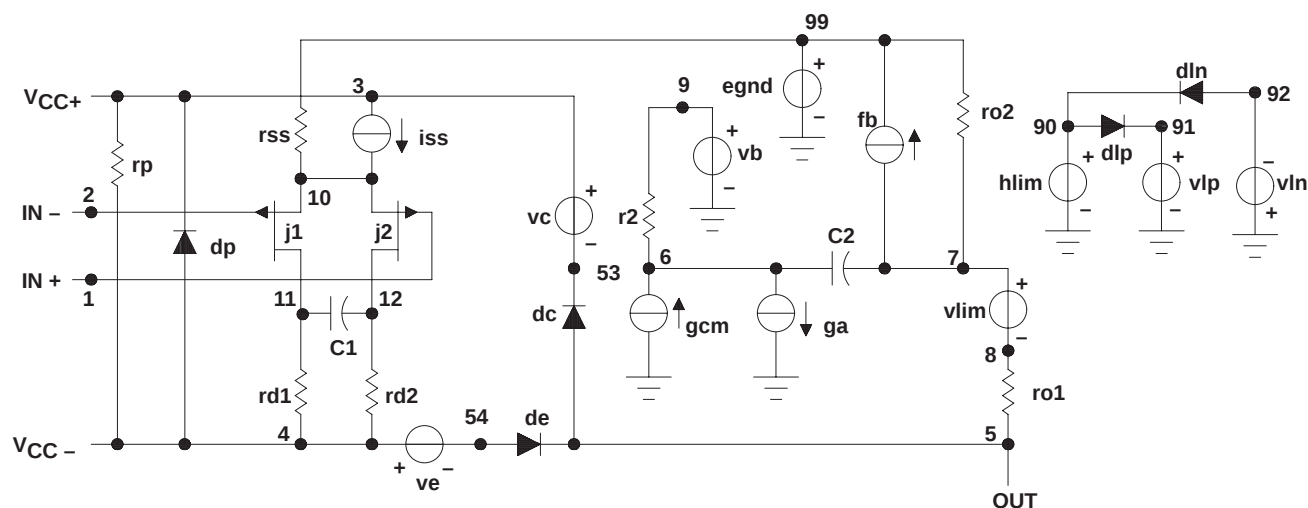


Figure 36. Boyle Macromodel

NOTE 5: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

APPLICATION INFORMATION

macromodel information (continued)

```
.subckt TLE2161 1 2 3 4 5
c1      11 12 125.4E-14
c2      6  7  5.000E-12
dc      5 53 dx
de      54 5d x
dlp     90 91 dx
dln     92 90 dx
dp      4  3 dx
egnd    99  0 poly(2) (3,0) (4,0) 0 .5 .5
fb      7 99 poly(5) vb vc ve vlp vln 0 4.085E6 -4E6 4E6 4E6 -4E6
ga      6  0 11 12 201.1E-6
gcm     0  6 10 99 3.576E-9
iss     3 10 dc 45.00E-6
hlim    90  0 vlim 1K
j1      11  2 10 jx
j2      12  1 10 jx
r2      6  9 100.0E3
rd1     4 11 4.973E3
rd2     4 12 4.973E3
ro1     8  5 280
ro2     7 99 280
rp      3  4 113.2E3
rss     10 99 4.444E6
vb      9  0 dc 0
vc      3 53 dc 2
ve     54  4 dc 2
vlim    7  8 dc 0
vlp     91  0 dc 50
vln     0 92 dc 50
.model dx D (Is=800.0E-18)
.model jx PJF (Is=1.000E-12 Beta=480E-6 Vto=-1)
.ends
```

Figure 37. Macromodel Subcircuit

APPLICATION INFORMATION

input characteristics

The TLE2161, TLE2161A and TLE2161B are specified with a minimum and a maximum input voltage that if exceeded at either input could cause the device to malfunction.

Because of the extremely high input impedance and resulting low bias-current requirements, the TLE2161, TLE2161A, and TLE2161B are well suited for low-level signal processing; however, leakage currents on printed circuit boards and sockets can easily exceed bias-current requirements and cause degradation in system performance. It is a good practice to include guard rings around inputs (see Figure 38). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

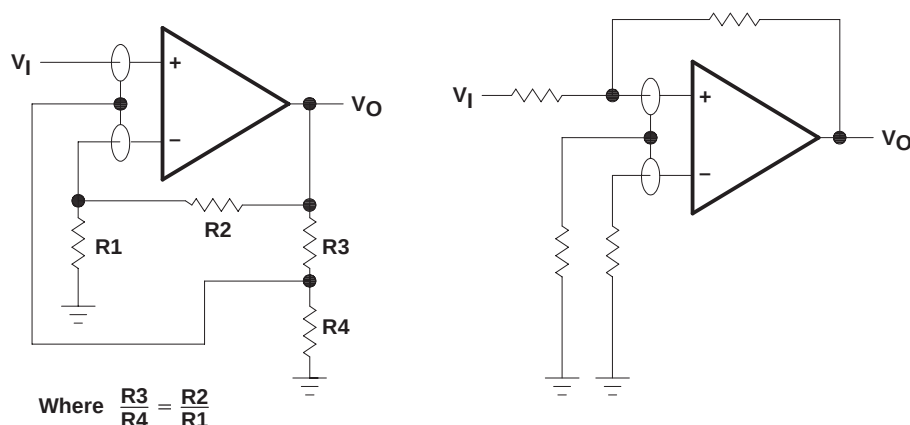


Figure 38. Use of Guard Rings

input offset voltage nulling

The TLE2161 series offers external null pins that can further reduce the input offset voltage. The circuit in Figure 39 can be connected as shown if the feature is desired. When external nulling is not needed, the null pins may be left disconnected.

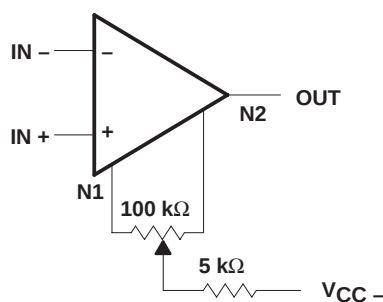


Figure 39. Input Offset Voltage Nulling

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
5962-9095801QPA	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095801QPA TLE2161M
5962-9095802QPA	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095802QPA TLE2161AM
5962-9095803QPA	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095803QPA TLE2161BM
TLE2161ACD	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	0 to 70	2161AC
TLE2161AIDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-	2161AI
TLE2161AIDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	2161AI
TLE2161AMJGB	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095802QPA TLE2161AM
TLE2161AMJGB.A	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095802QPA TLE2161AM
TLE2161BMJGB	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095803QPA TLE2161BM
TLE2161BMJGB.A	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095803QPA TLE2161BM
TLE2161ID	Obsolete	Production	SOIC (D) 8	-	-	Call TI	Call TI	-	2161I
TLE2161IDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-	2161I
TLE2161IDR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	See TLE2161IDR	2161I
TLE2161MJGB	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095801QPA TLE2161M
TLE2161MJGB.A	Active	Production	CDIP (JG) 8	50 TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	9095801QPA TLE2161M

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TLE2161, TLE2161A, TLE2161AM, TLE2161M :

- Catalog : [TLE2161A](#), [TLE2161](#)
- Military : [TLE2161M](#), [TLE2161AM](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLE2161AIDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TLE2161IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLE2161AIDR	SOIC	D	8	2500	340.5	338.1	20.6
TLE2161IDR	SOIC	D	8	2500	353.0	353.0	32.0

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated