
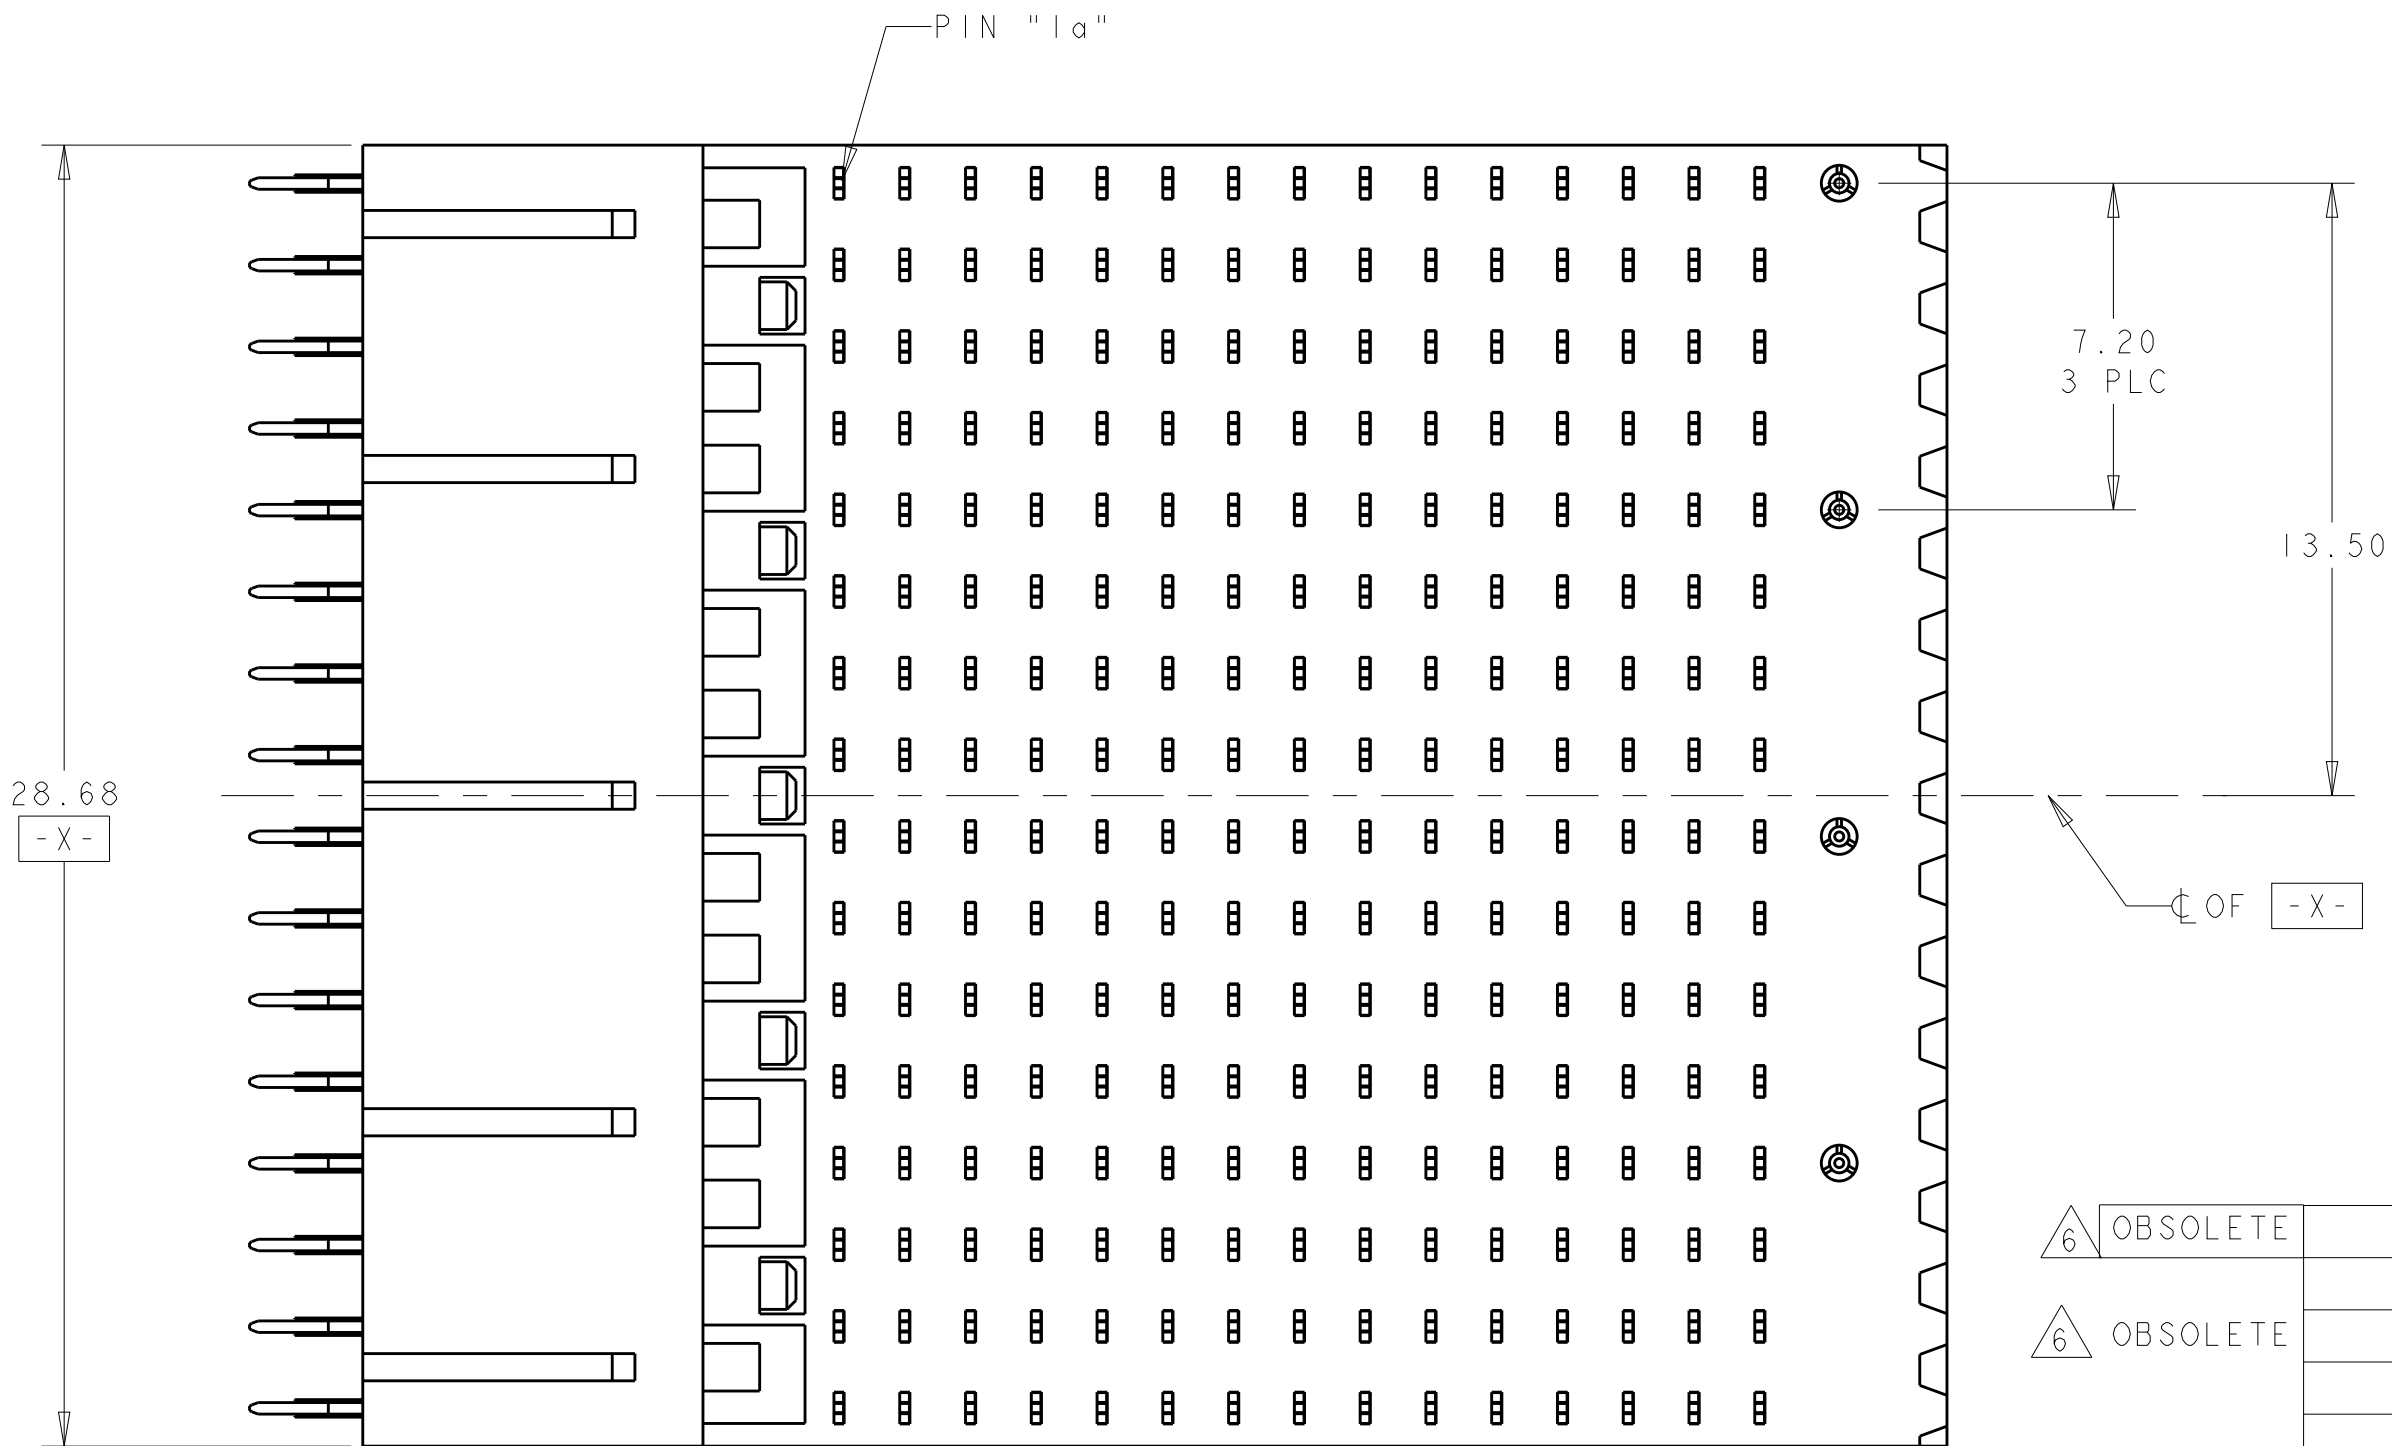
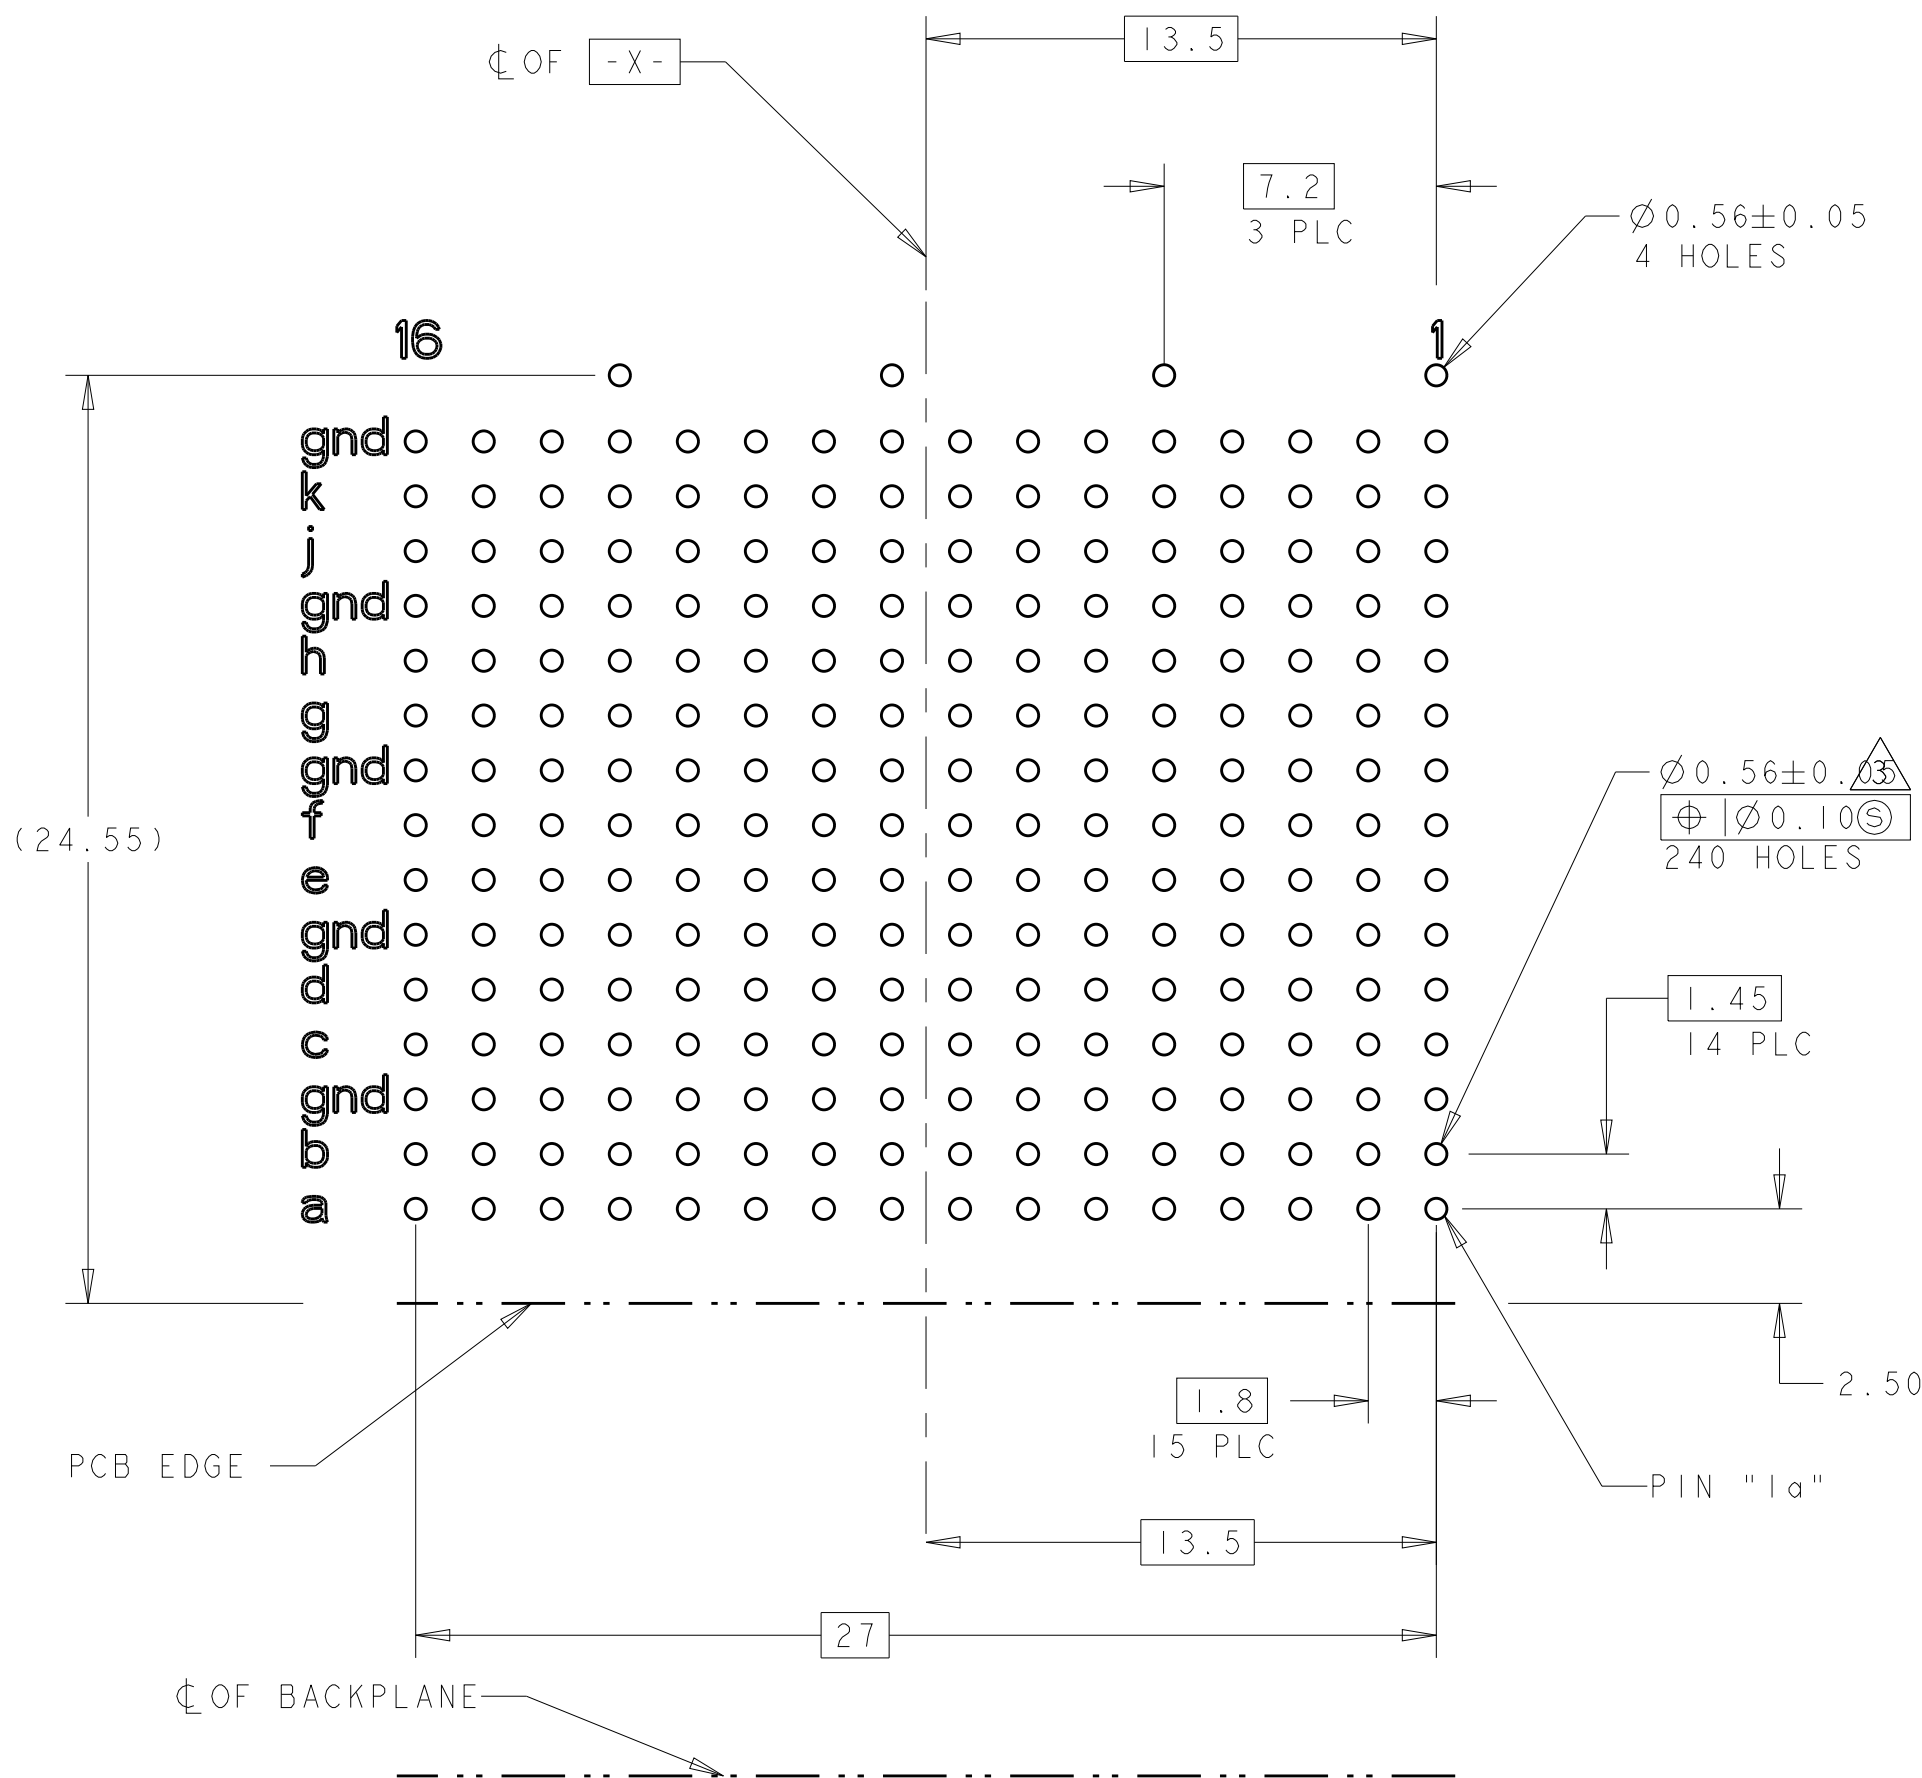
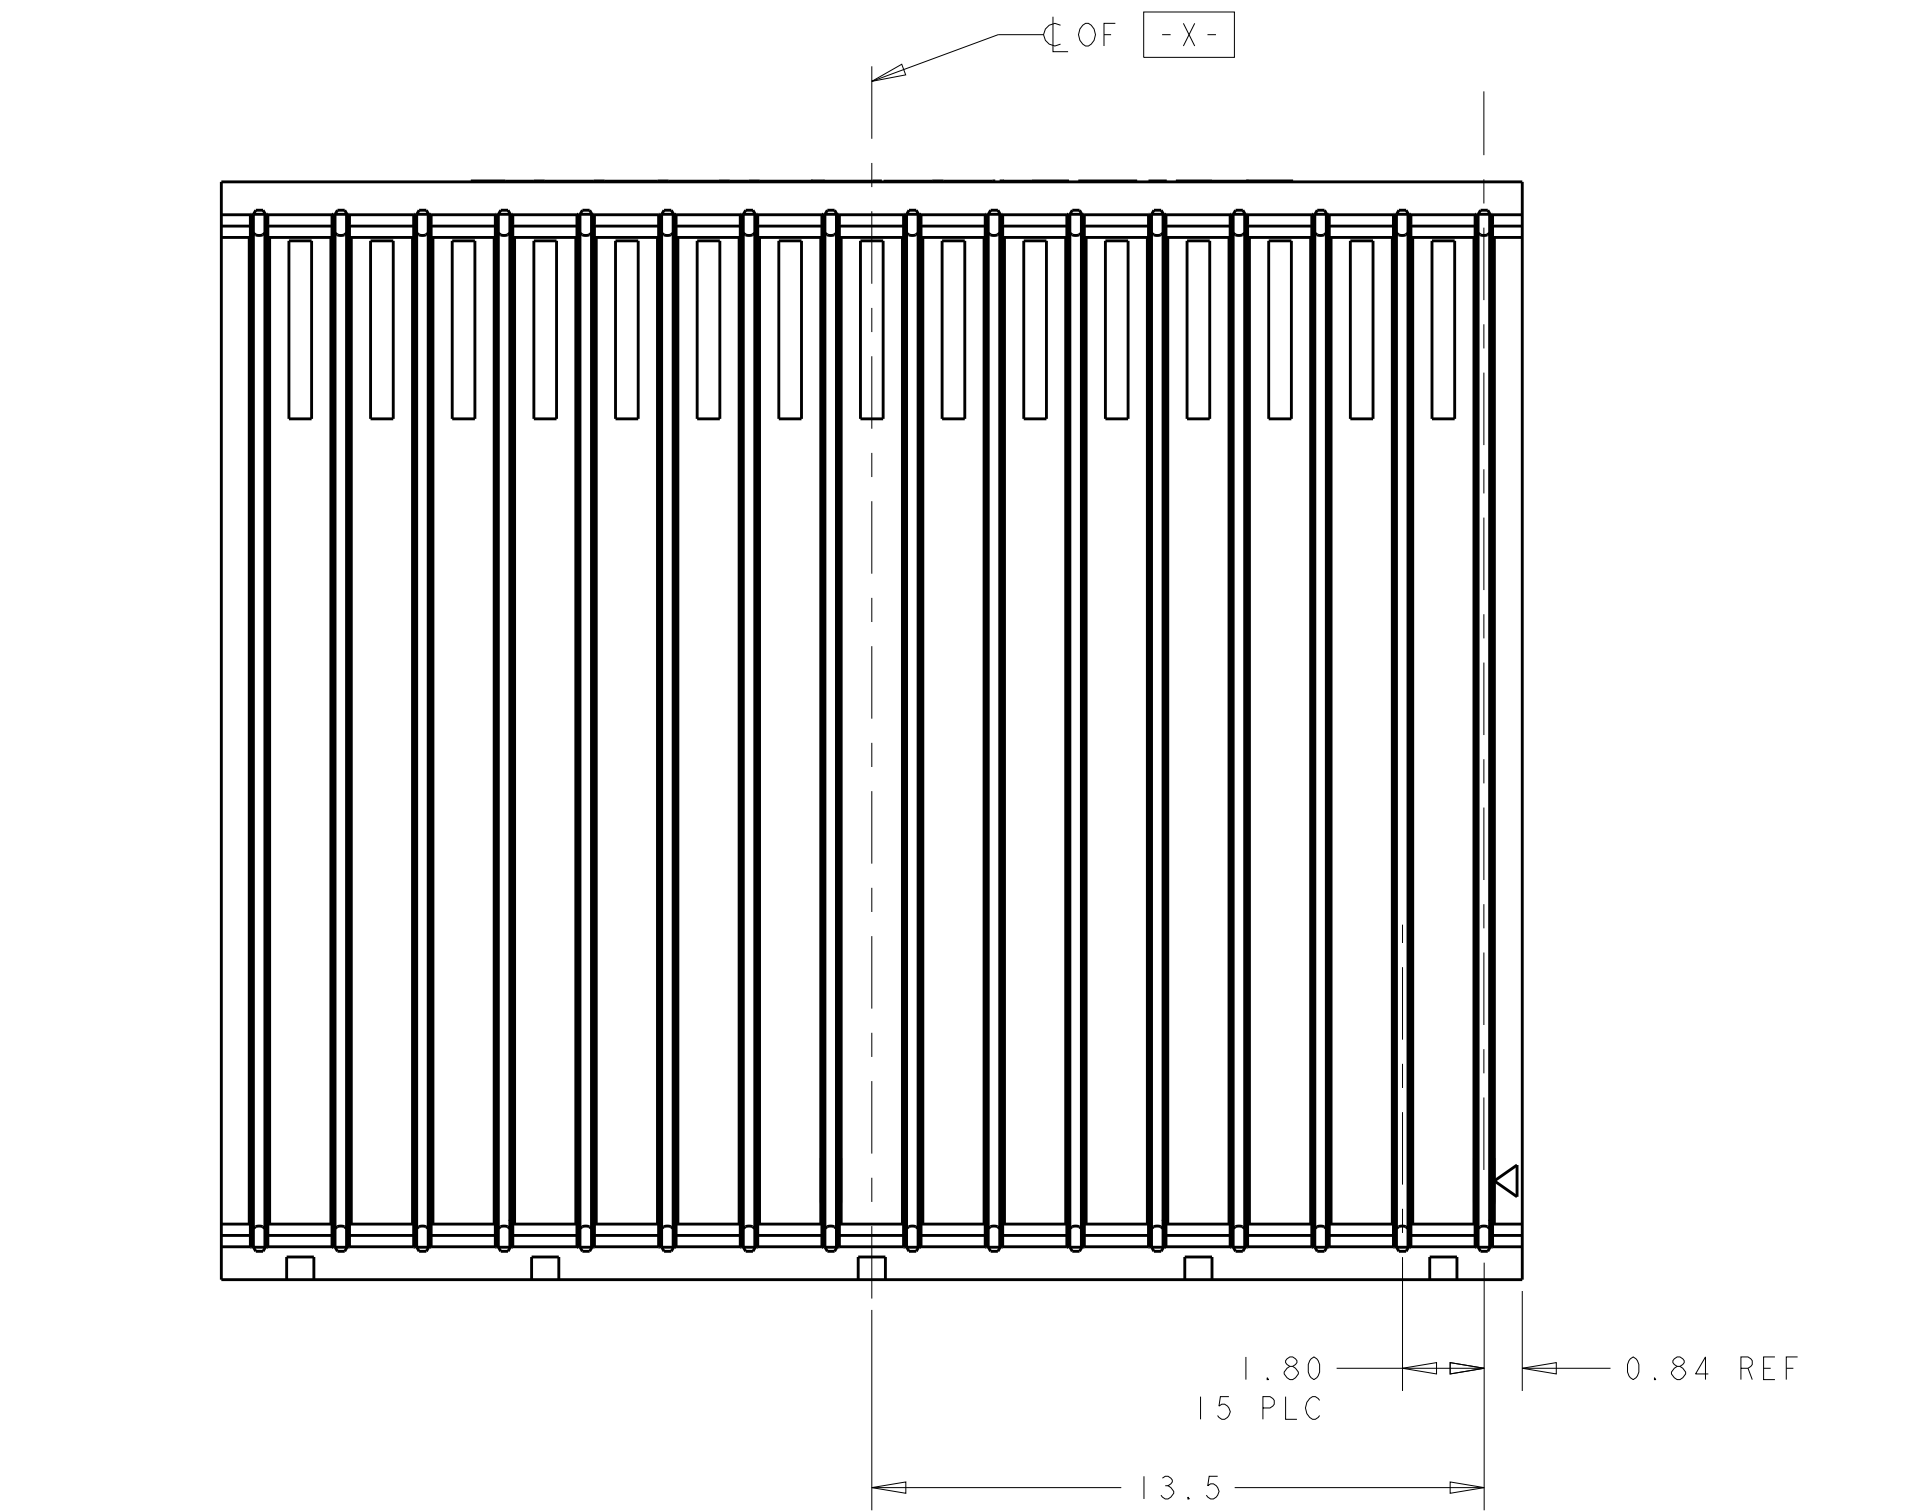


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A2	REVISED PER ECO-12-011861	28JUN2012	KH	AS

- 1 HOUSING: LCP, UL94V-0, BLACK.
CONTACT: PHOSPHOR BRONZE.
POST: BRASS WIRE.
- 2 CONTACT: 0.76 µm GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 µm MIN TIN-LEAD
ON PCB TAIL,
OVER 1.27µm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST:1.27 µm MIN NICKEL.
- 3 PLATED THROUGH HOLE PER 114-13056,
FIGURE 4.
- 4 CONTACT: 0.76 µm GOLD PER ASTM B 488 IN CONTACT AREA,
1.27 µm MIN MATTE TIN PER ASTM B 545
ON PCB TAIL,
OVER 1.27 µm MIN NICKEL PER
SAE AMS-QQ-N-290 OVER ALL.
POST:1.27 µm MIN NICKEL.
- 5 NOTE DELETED.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

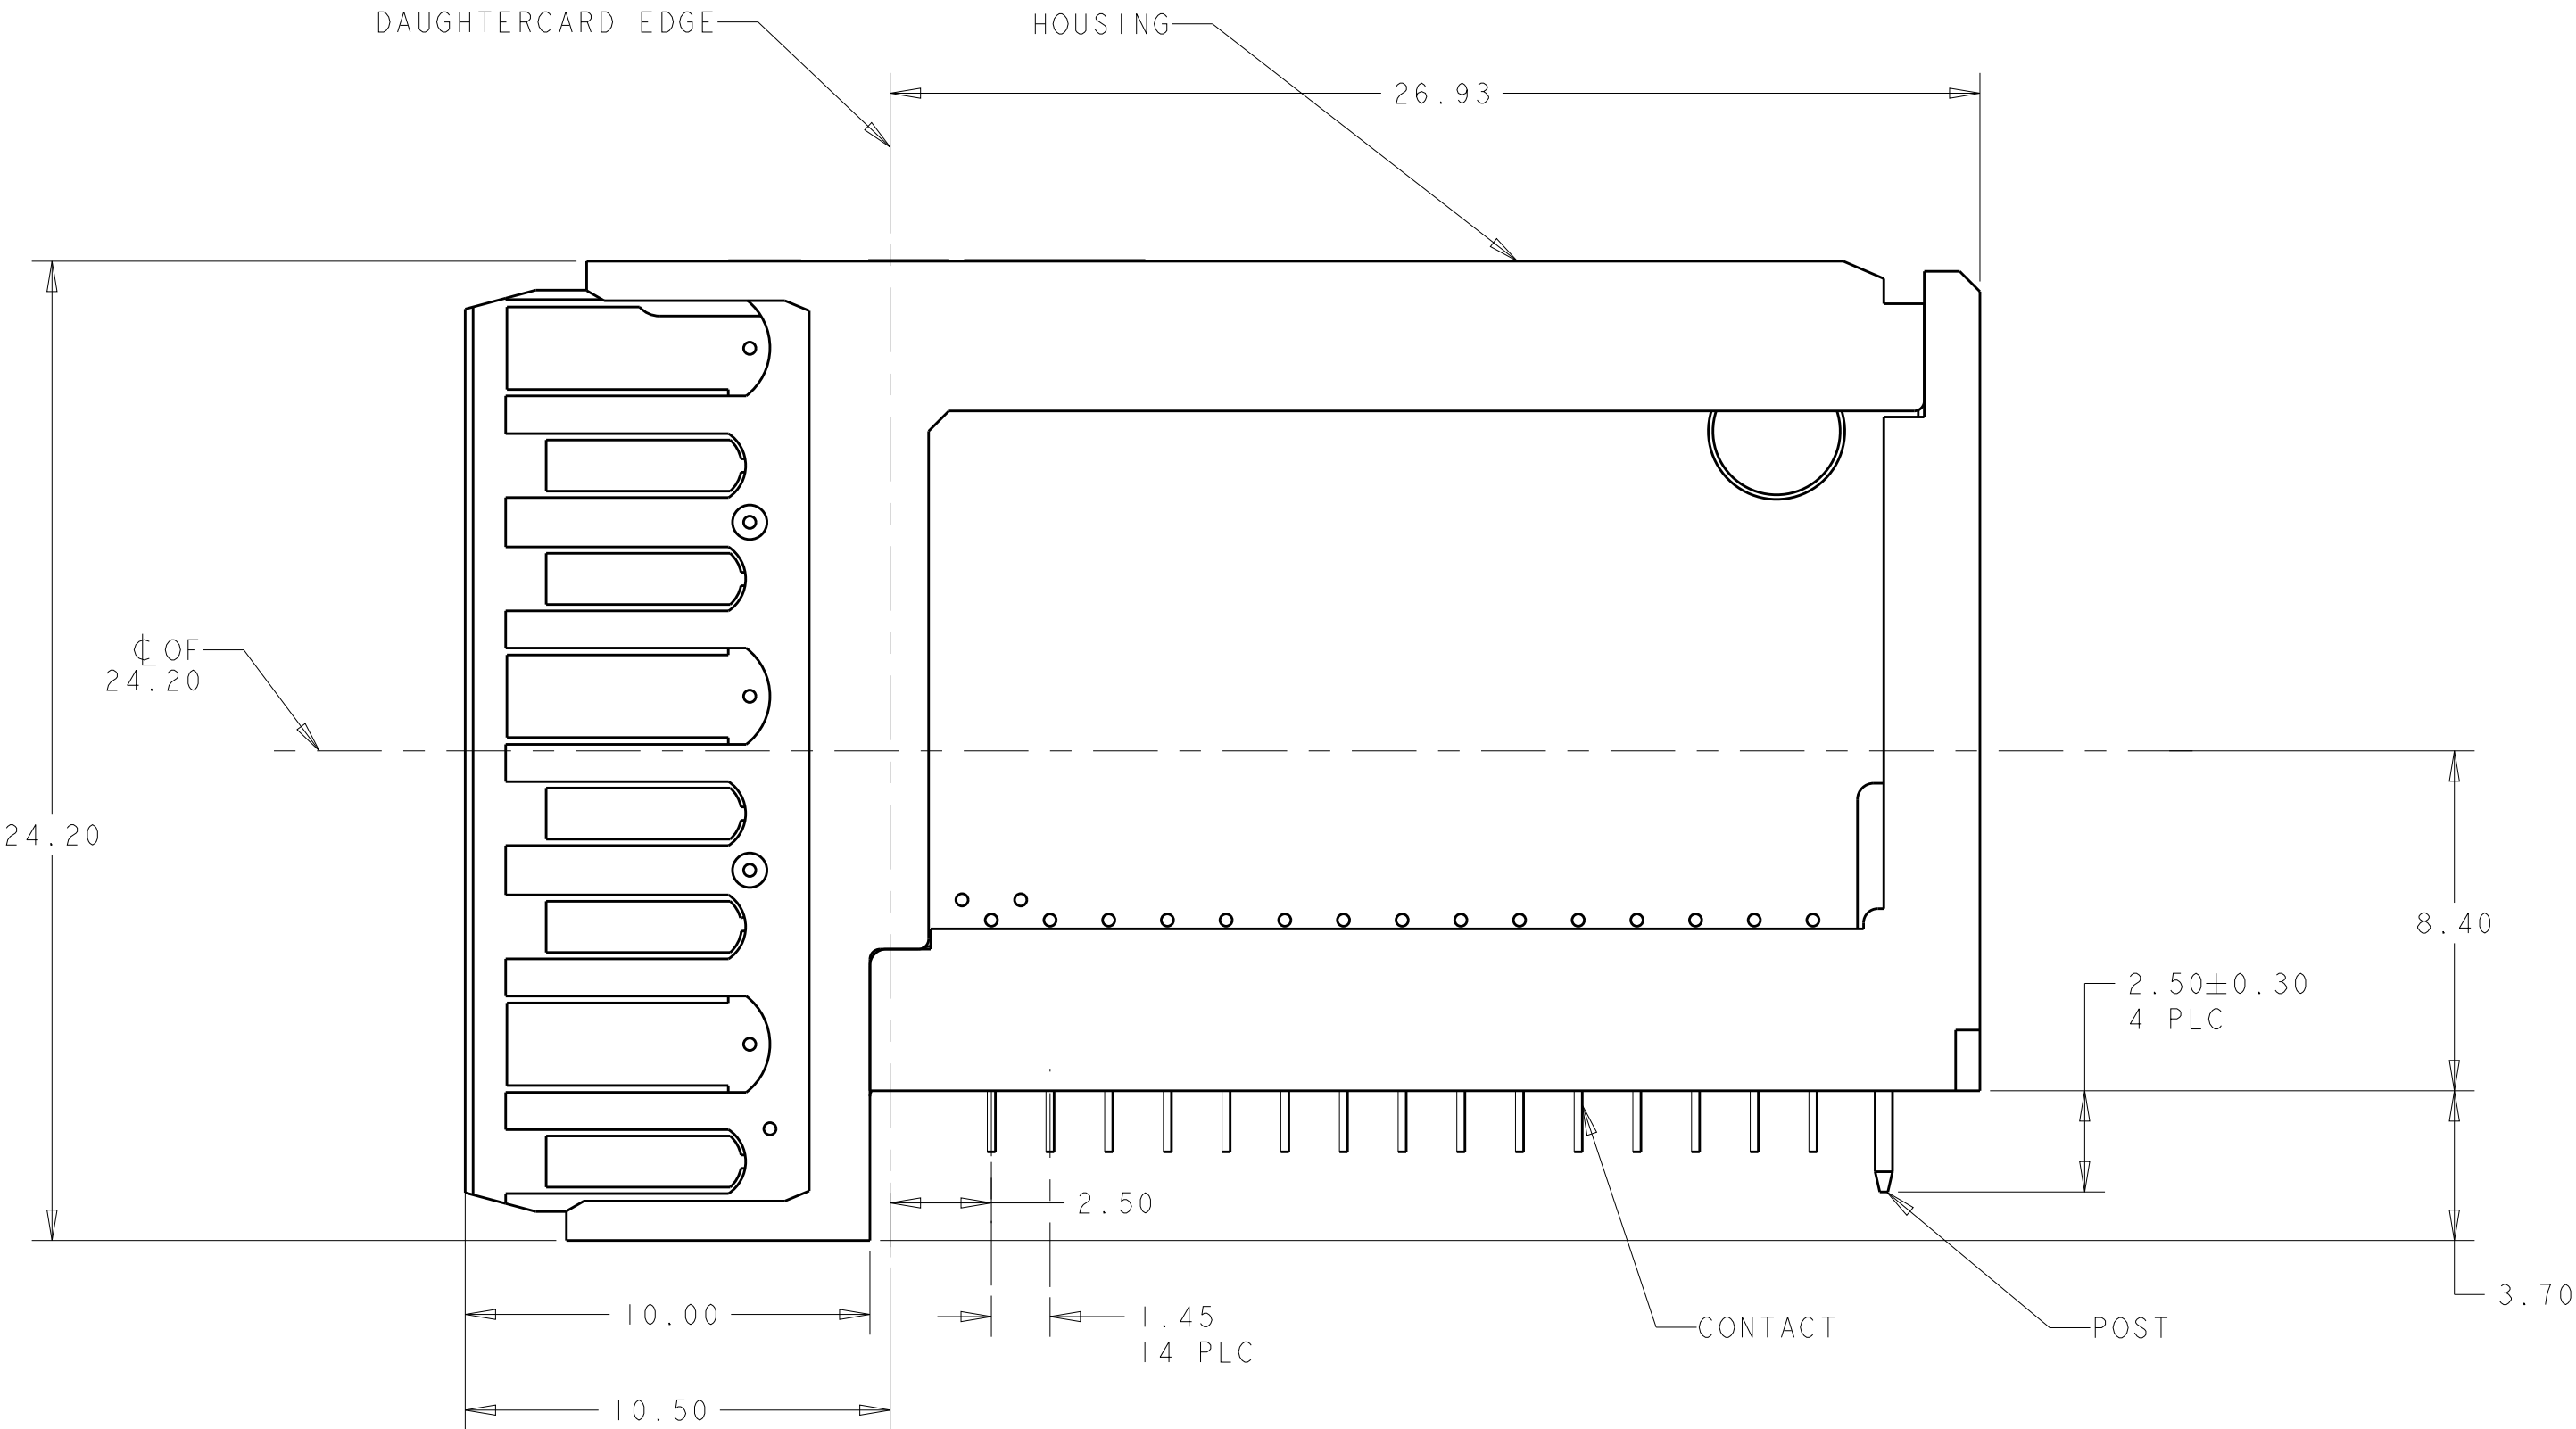

6 OBSOLETE	4	DIFFERENTIAL PAIR, NONSEQUENTIAL	1410215-4
	4	SINGLE END, NONSEQUEENTIAL	1410215-3
6 OBSOLETE	2	DIFFERENTIAL PAIR, NONSEQUENTIAL	1410215-2
	2	SINGLE END, NONSEQUEENTIAL	1410215-1
FINISH		DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.E.STAHL 06JUN2000	TE Connectivity	
DIMENSIONS:		CHK S.MICKLEVICZ 06JUN2000		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.MICKLEVICZ 06JUN2000	NAME	
mm		PRODUCT SPEC	RIGHT-ANGLE PLUG ASSEMBLY,	
0 PLC ±		108-2072	CENTER, FULL, 25.4mm, Multigig RT 1,	
1 PLC ±0.13		APPLICATION SPEC	DAUGHTERCARD CONNECTOR	
2 PLC ±0.013		114-13056	SIZE	
3 PLC ±		114-13056	CAGE CODE	
4 PLC ±		114-13056	DRAWING NO	
ANGLES		114-13056	RESTRICTED TO	
FINISH		114-13056	A100779C=1410215	
MATERIAL		114-13056	SCALE	
1		114-13056	8:1	
2		114-13056	SHEET	
3		114-13056	1	
4		114-13056	OF	
5		114-13056	1	
6		114-13056	REV	
7		114-13056	A2	
8		114-13056	CUSTOMER DRAWING	