

**Ordering number C12476\_MIRELLA-50-S**

Family	Mirella	FWHM	17 degrees
Type	Reflector	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/Im	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	24 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number CN12483\_MIRELLA-50-S-DL**

Family	Mirella	FWHM	21 degrees
Type	Pack	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/Im	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number C12477\_MIRELLA-50-M**

Family	Mirella	FWHM	22 degrees
Type	Reflector	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/Im	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number CN12484\_MIRELLA-50-M-DL**

Family	Mirella	FWHM	28 degrees
Type	Pack	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/Im	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number C12478\_MIRELLA-50-W**

Family	Mirella	FWHM	34 degrees
Type	Reflector	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/lm	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**Ordering number CN12485\_MIRELLA-50-W-DL**

Family	Mirella	FWHM	41 degrees
Type	Pack	Efficiency	(simulated) 0 %
LED	LUXEON S	cd/lm	-
Color	Metal	Gerber File	Available
Diameter	49.9 mm		
Height	23.9 mm		
Style	Round		
Optic Material	PC		
Holder Material	-		
Fastening	Glue		
Status	Ready		

**NOTE:** The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



## PRODUCT DATASHEET

### Mirella series

last update 3/10/2012

PHILIPS  
LUMILEDS

#### GENERAL INFORMATION

- Product series especially designed & optimized for LUXEON S series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PC with high UV and temperature resistance (120 degrees of Celcius / 248 degrees of Fahrenheit). Allows use of high current and temperature conditions.

Please find more information about used materials from below:

[http://ledil.fi/sites/default/files/Documents/Technical/Material/PC%20Makrolon%202400\\_2407\\_2456\\_2458-UL.pdf](http://ledil.fi/sites/default/files/Documents/Technical/Material/PC%20Makrolon%202400_2407_2456_2458-UL.pdf)

- Reflector is made of aluminium coated PC (120 degrees of Celcius / 248 degrees of Fahrenheit) with protective lacquer (110 degrees of Celcius / 230 degrees of Fahrenheit).

- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.


[http://www.ledil.com/datasheets/DataSheet\\_GLUES.pdf](http://www.ledil.com/datasheets/DataSheet_GLUES.pdf)

**NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit board weaken the strength of the glue.**


**NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.**

**Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.**


**Relative intensity of C12476\_Mirella\_50-S\_(Luxeon\_S)**

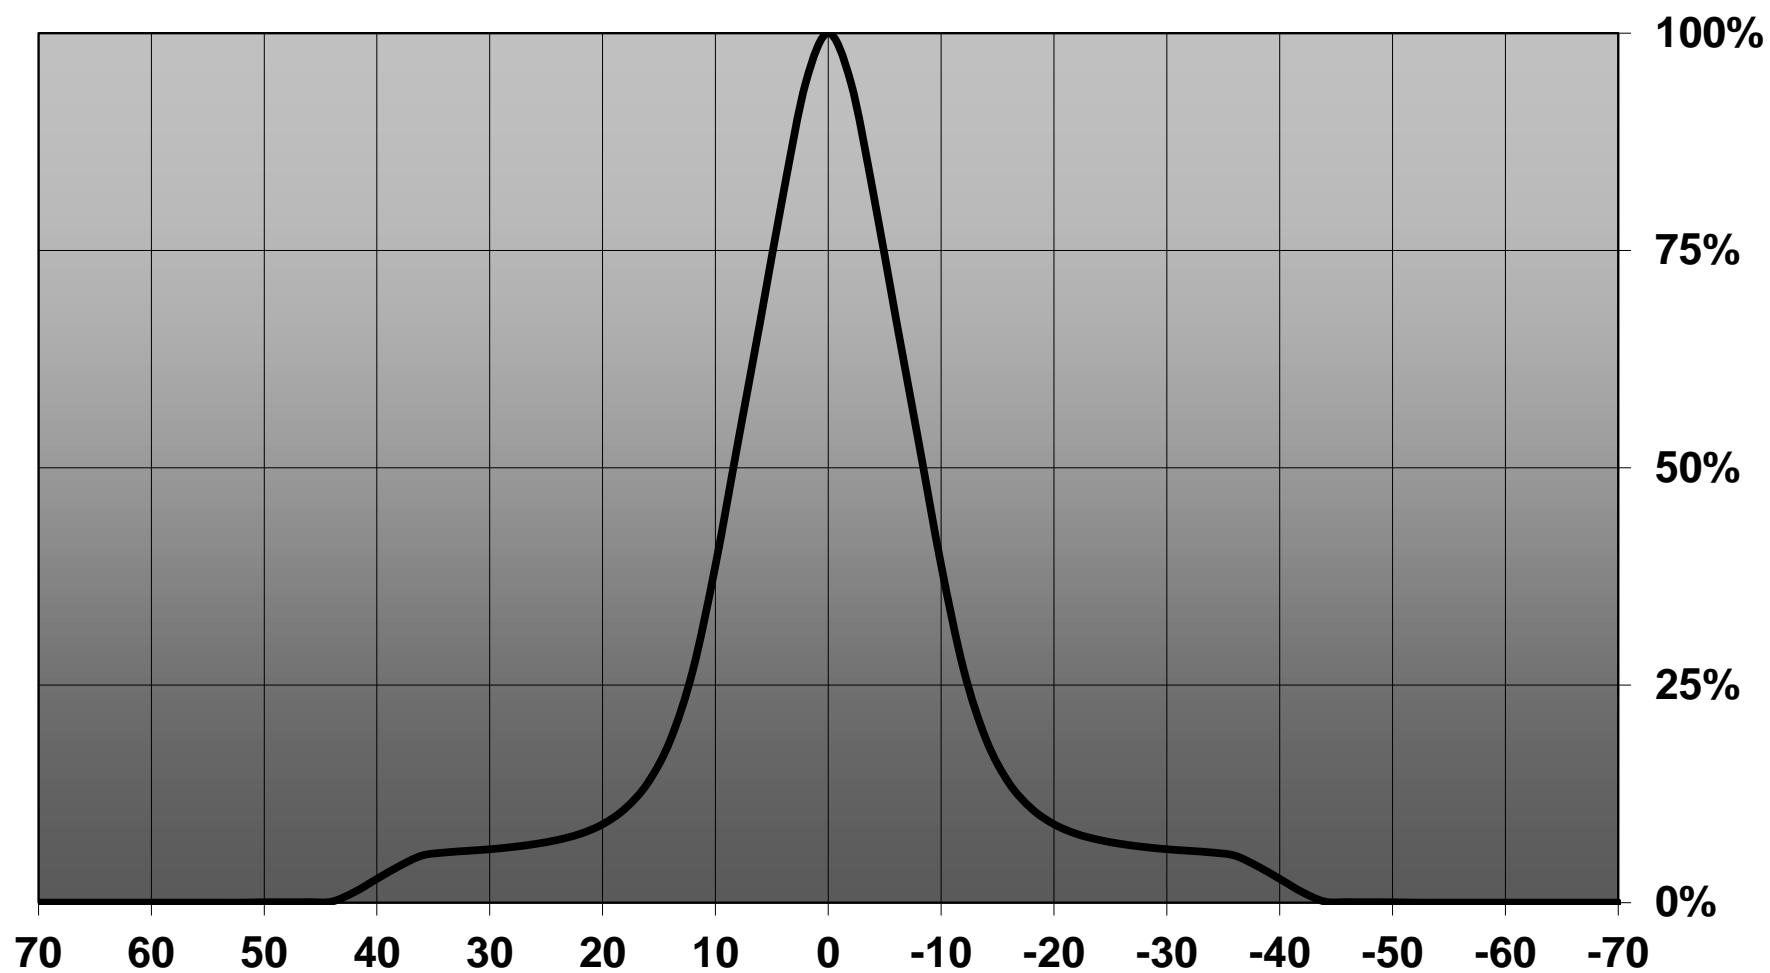


Relative intensity of CN12483\_MIRELLA-50-S-DL\_(Luxeon\_S)

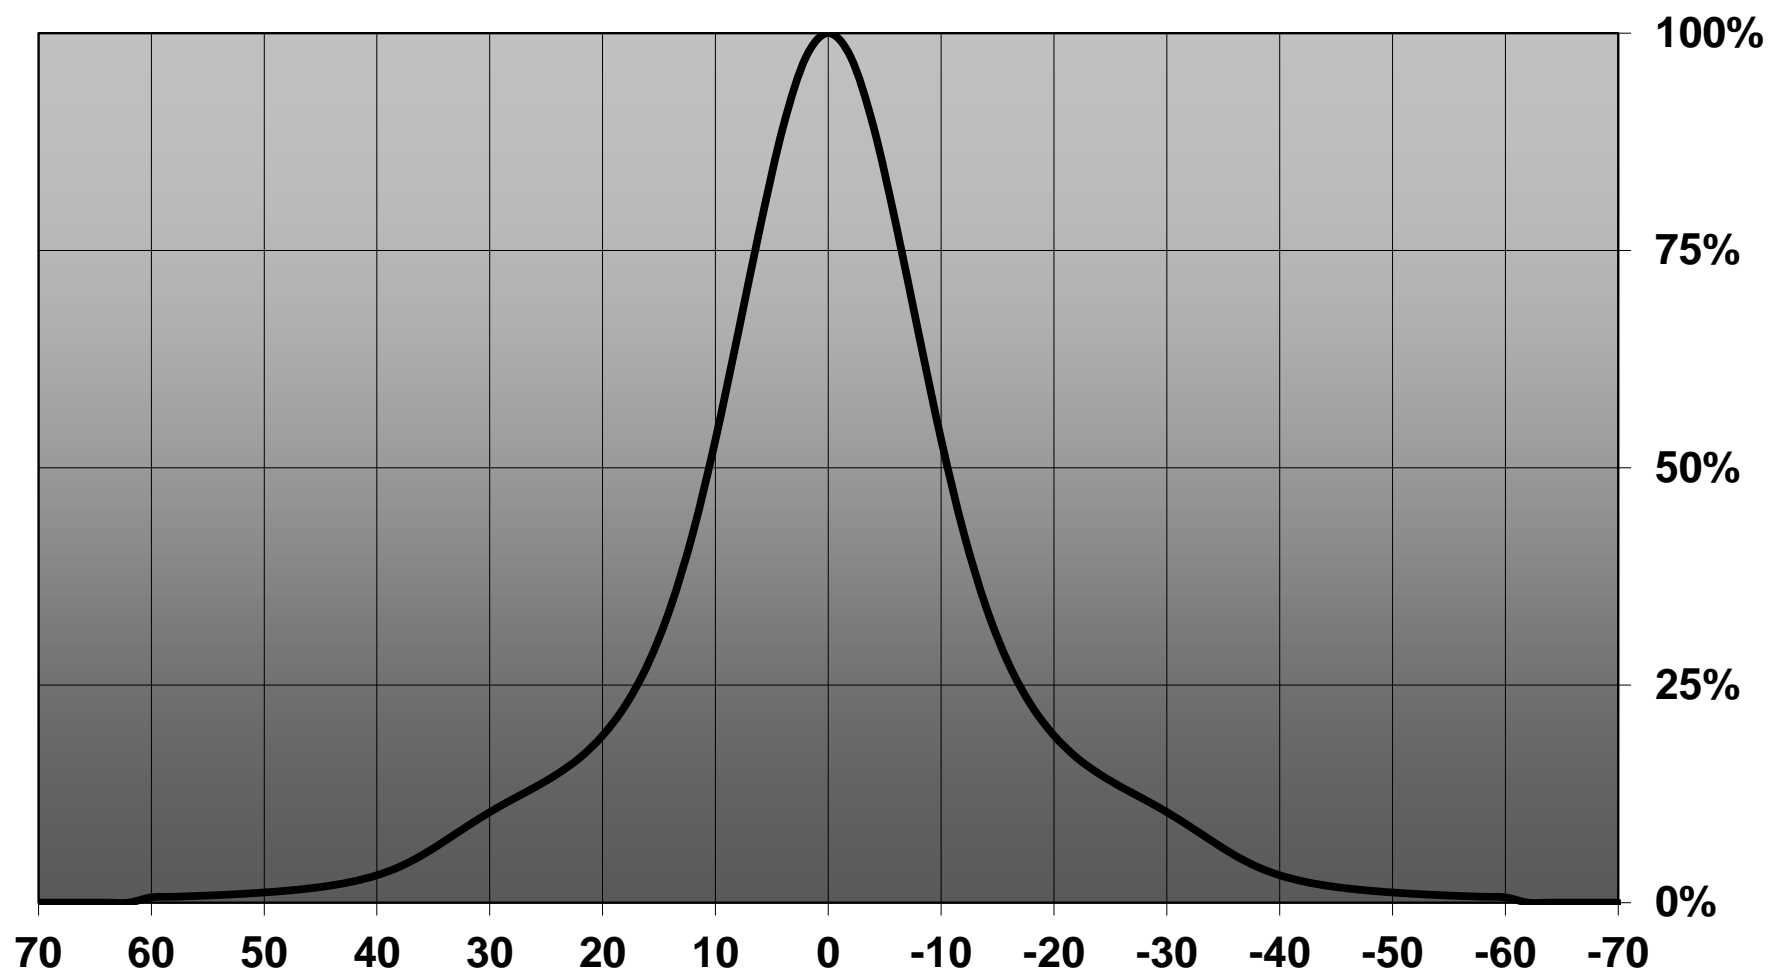


Relative intensity of C12477\_Mirella\_50-M\_(Luxeon\_S)

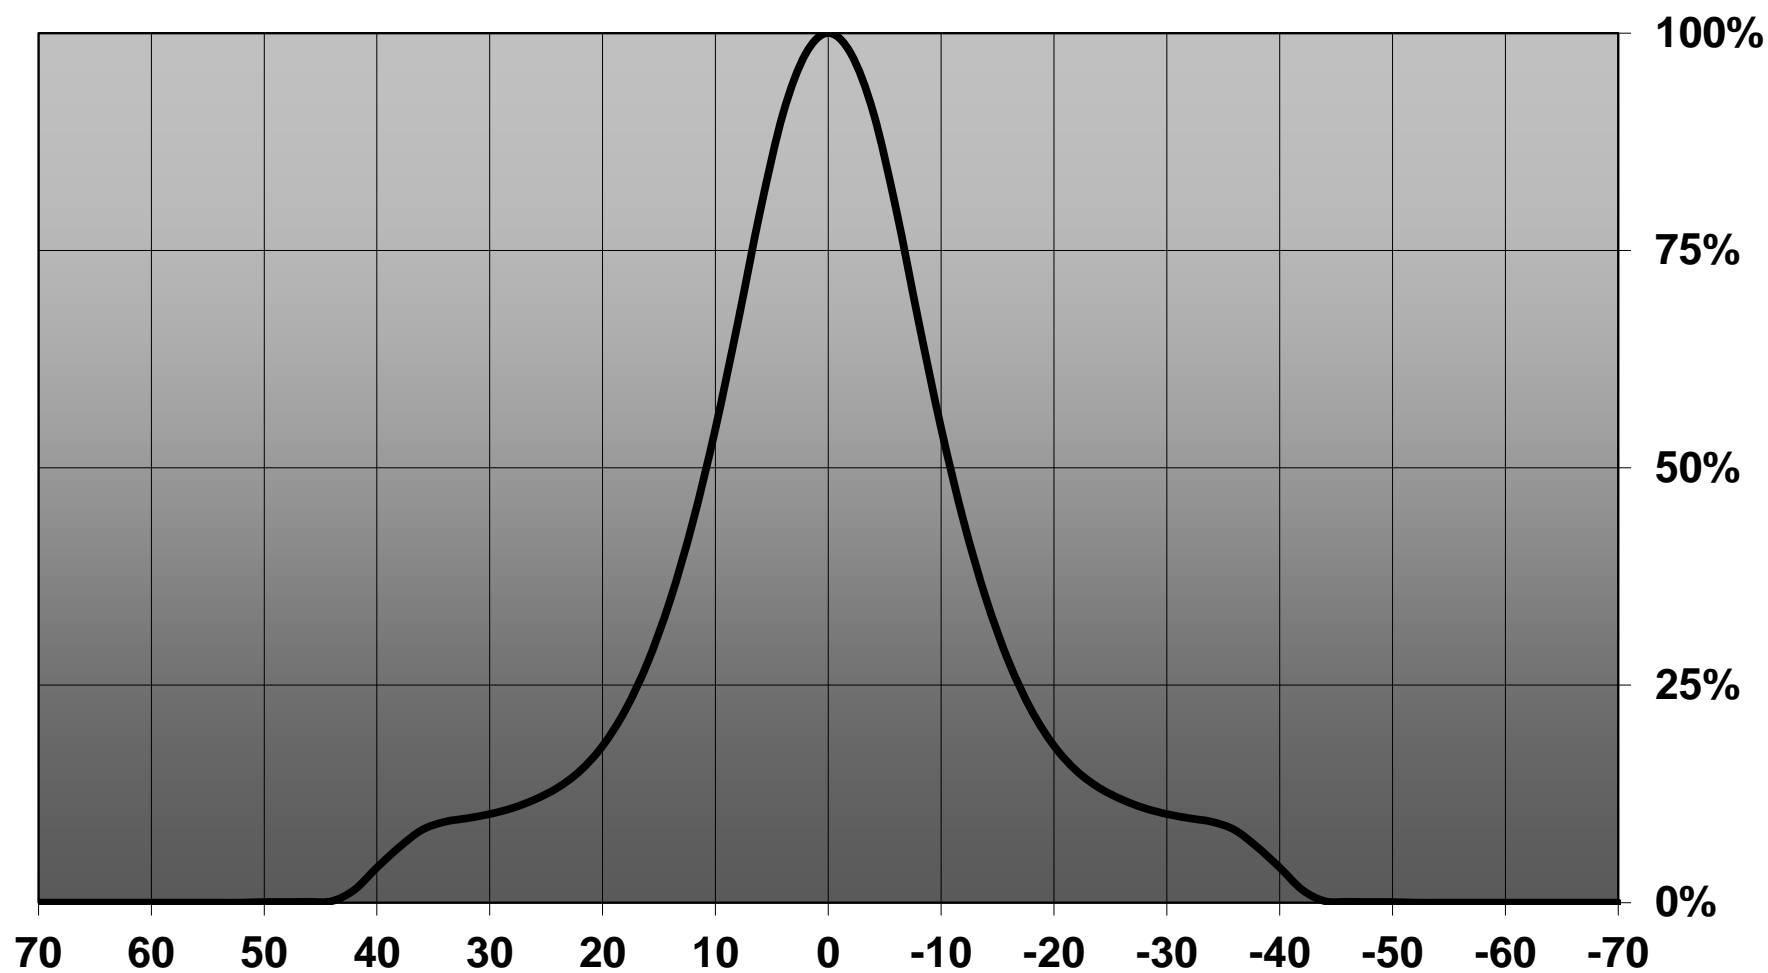

Relative intensity of CN12484\_MIRELLA-50-M-DL\_(Luxeon\_S)

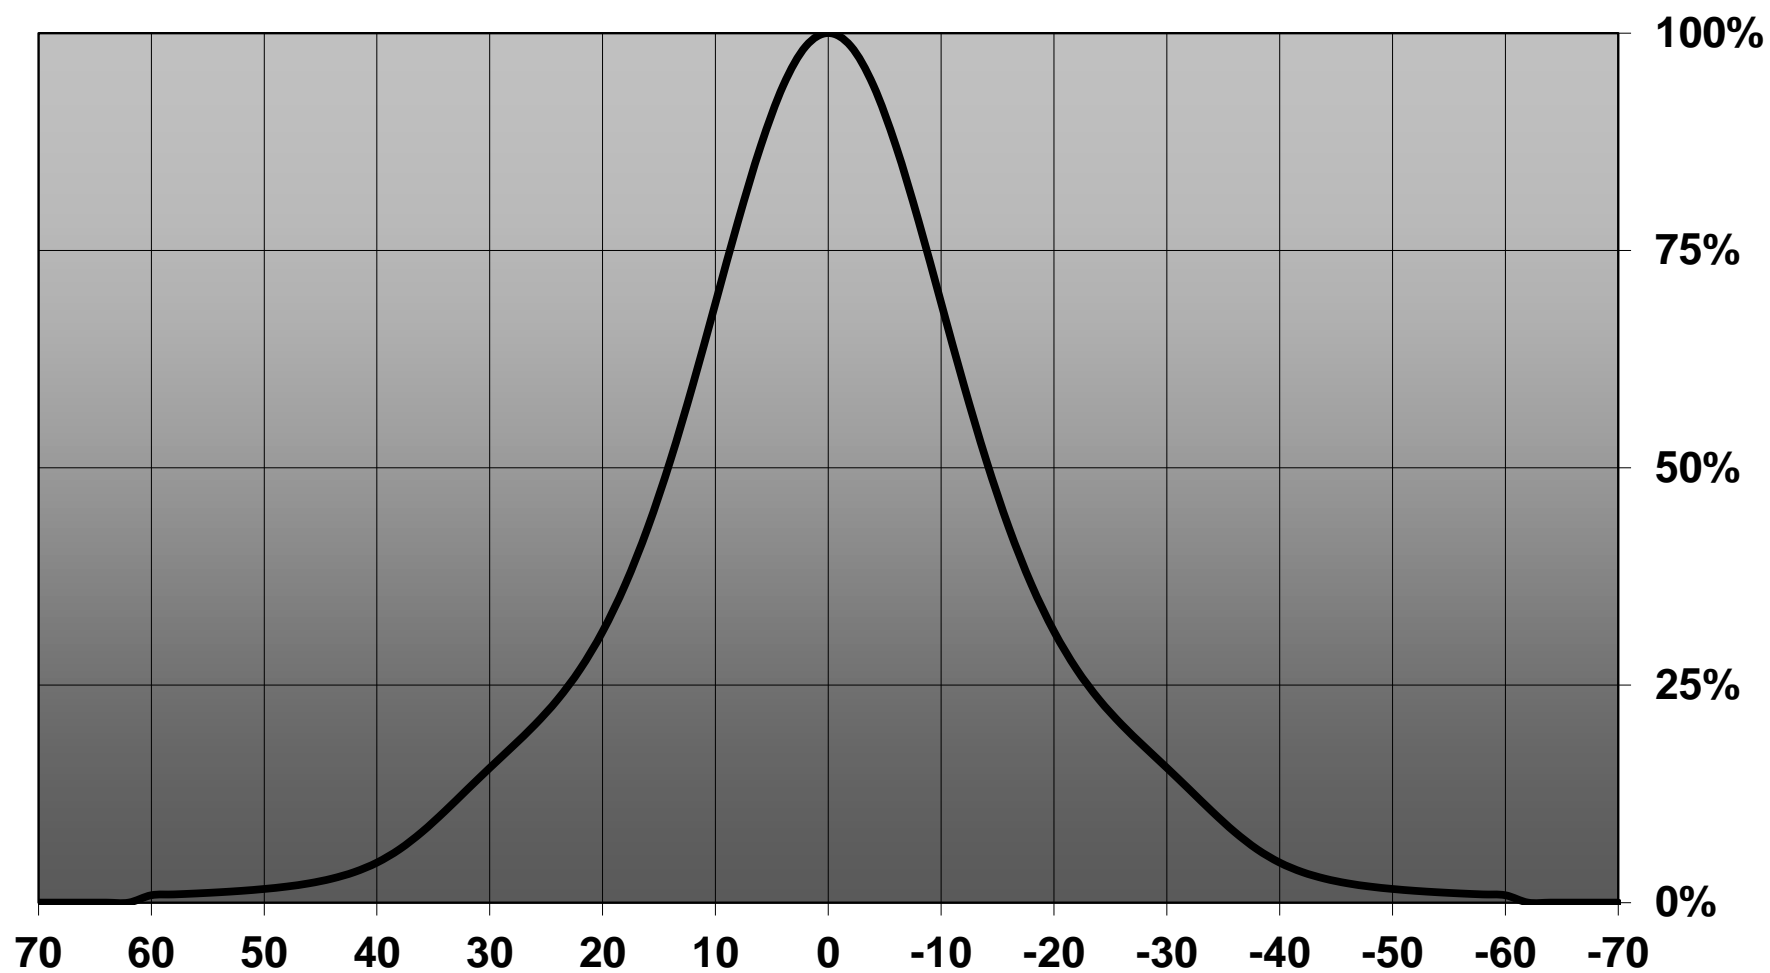



Relative intensity of C12478\_Mirella\_50-W\_(Luxeon\_S)

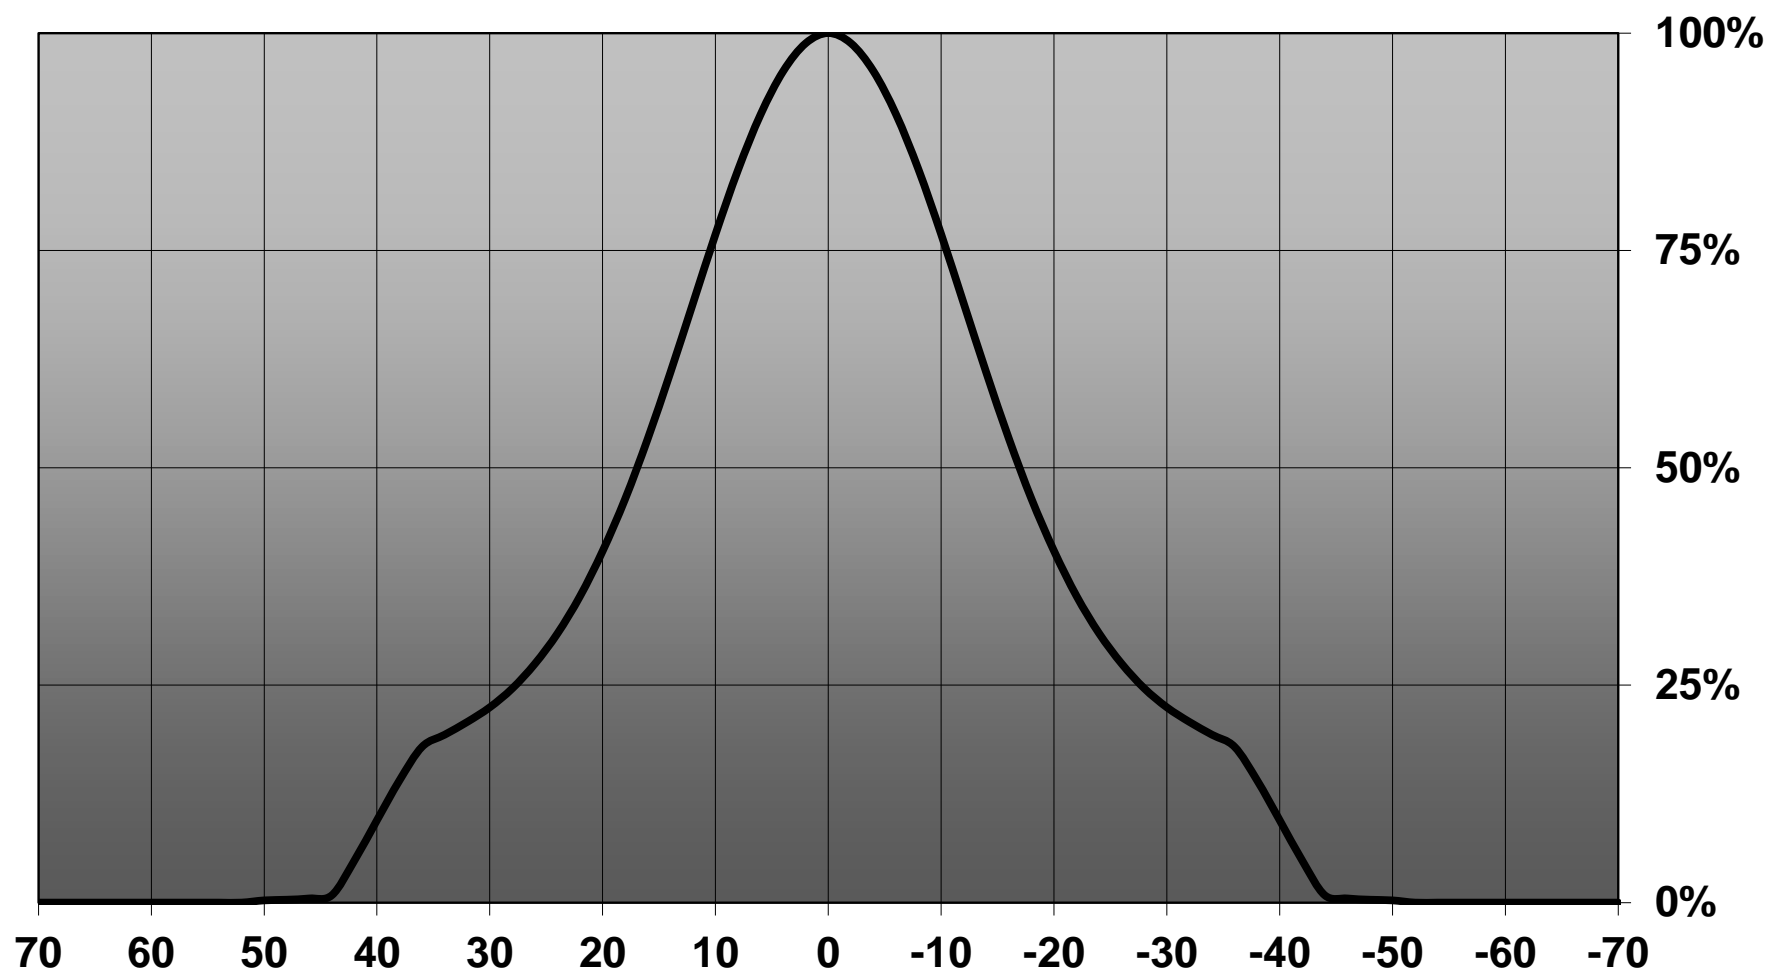




Relative intensity of CN12485\_MIRELLA-50-W-DL\_(Luxeon\_S)

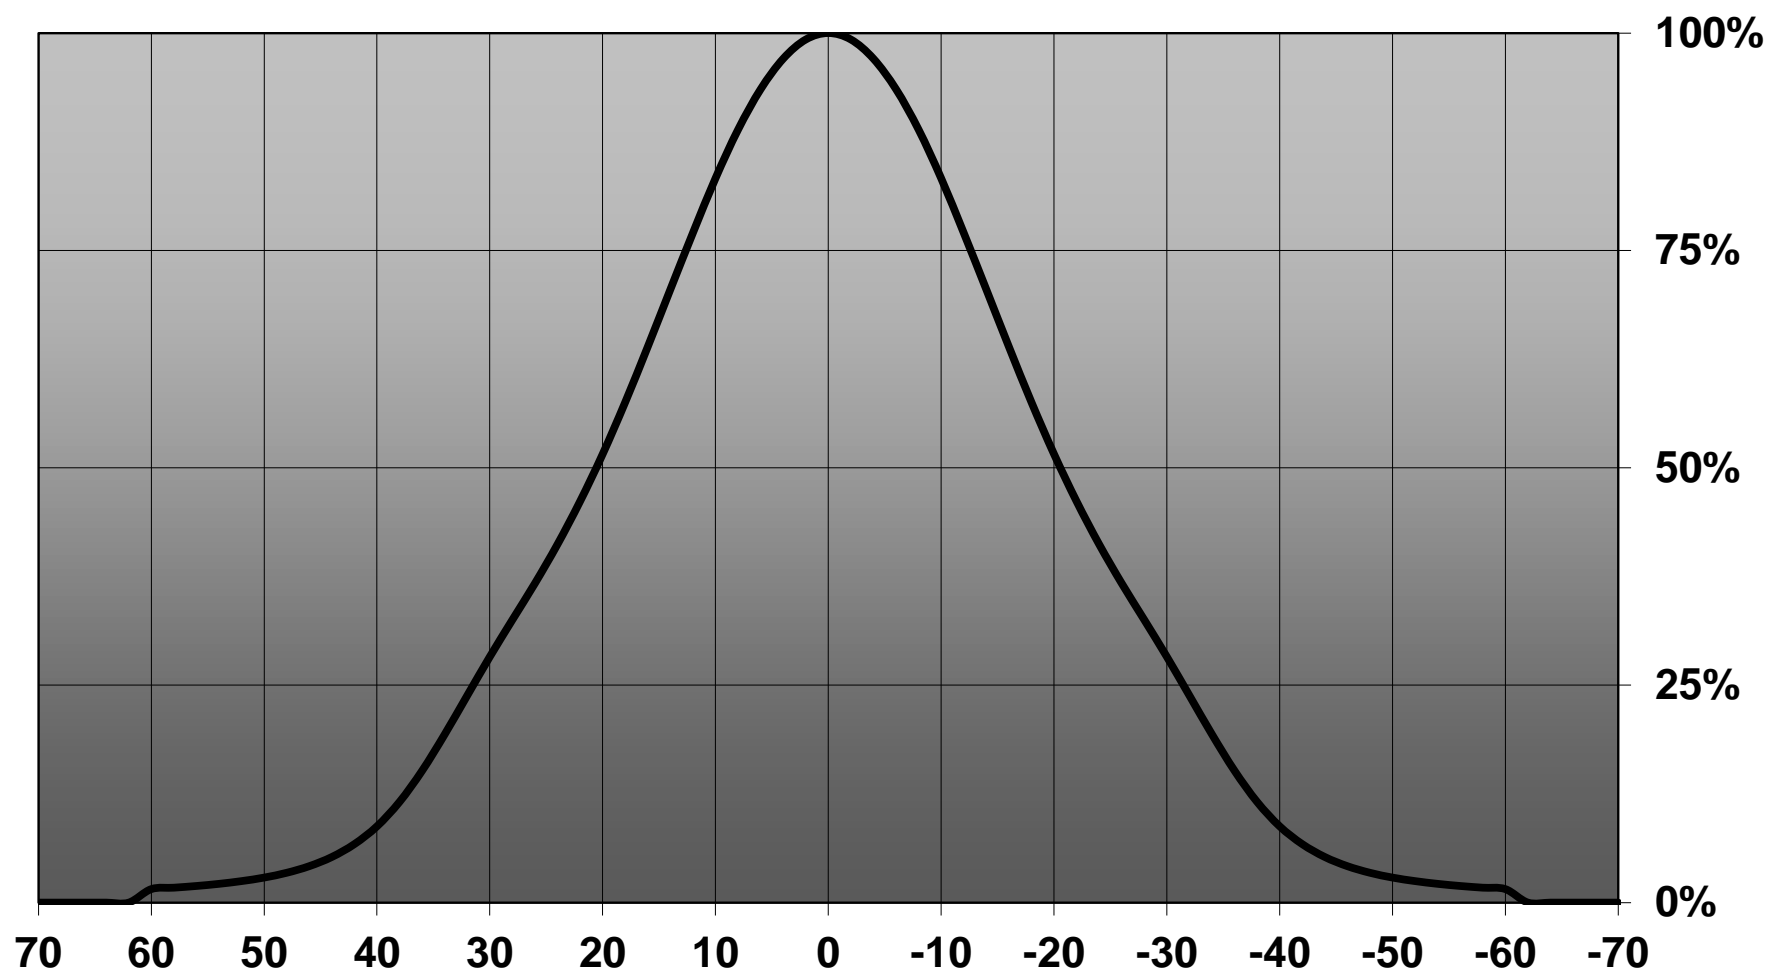

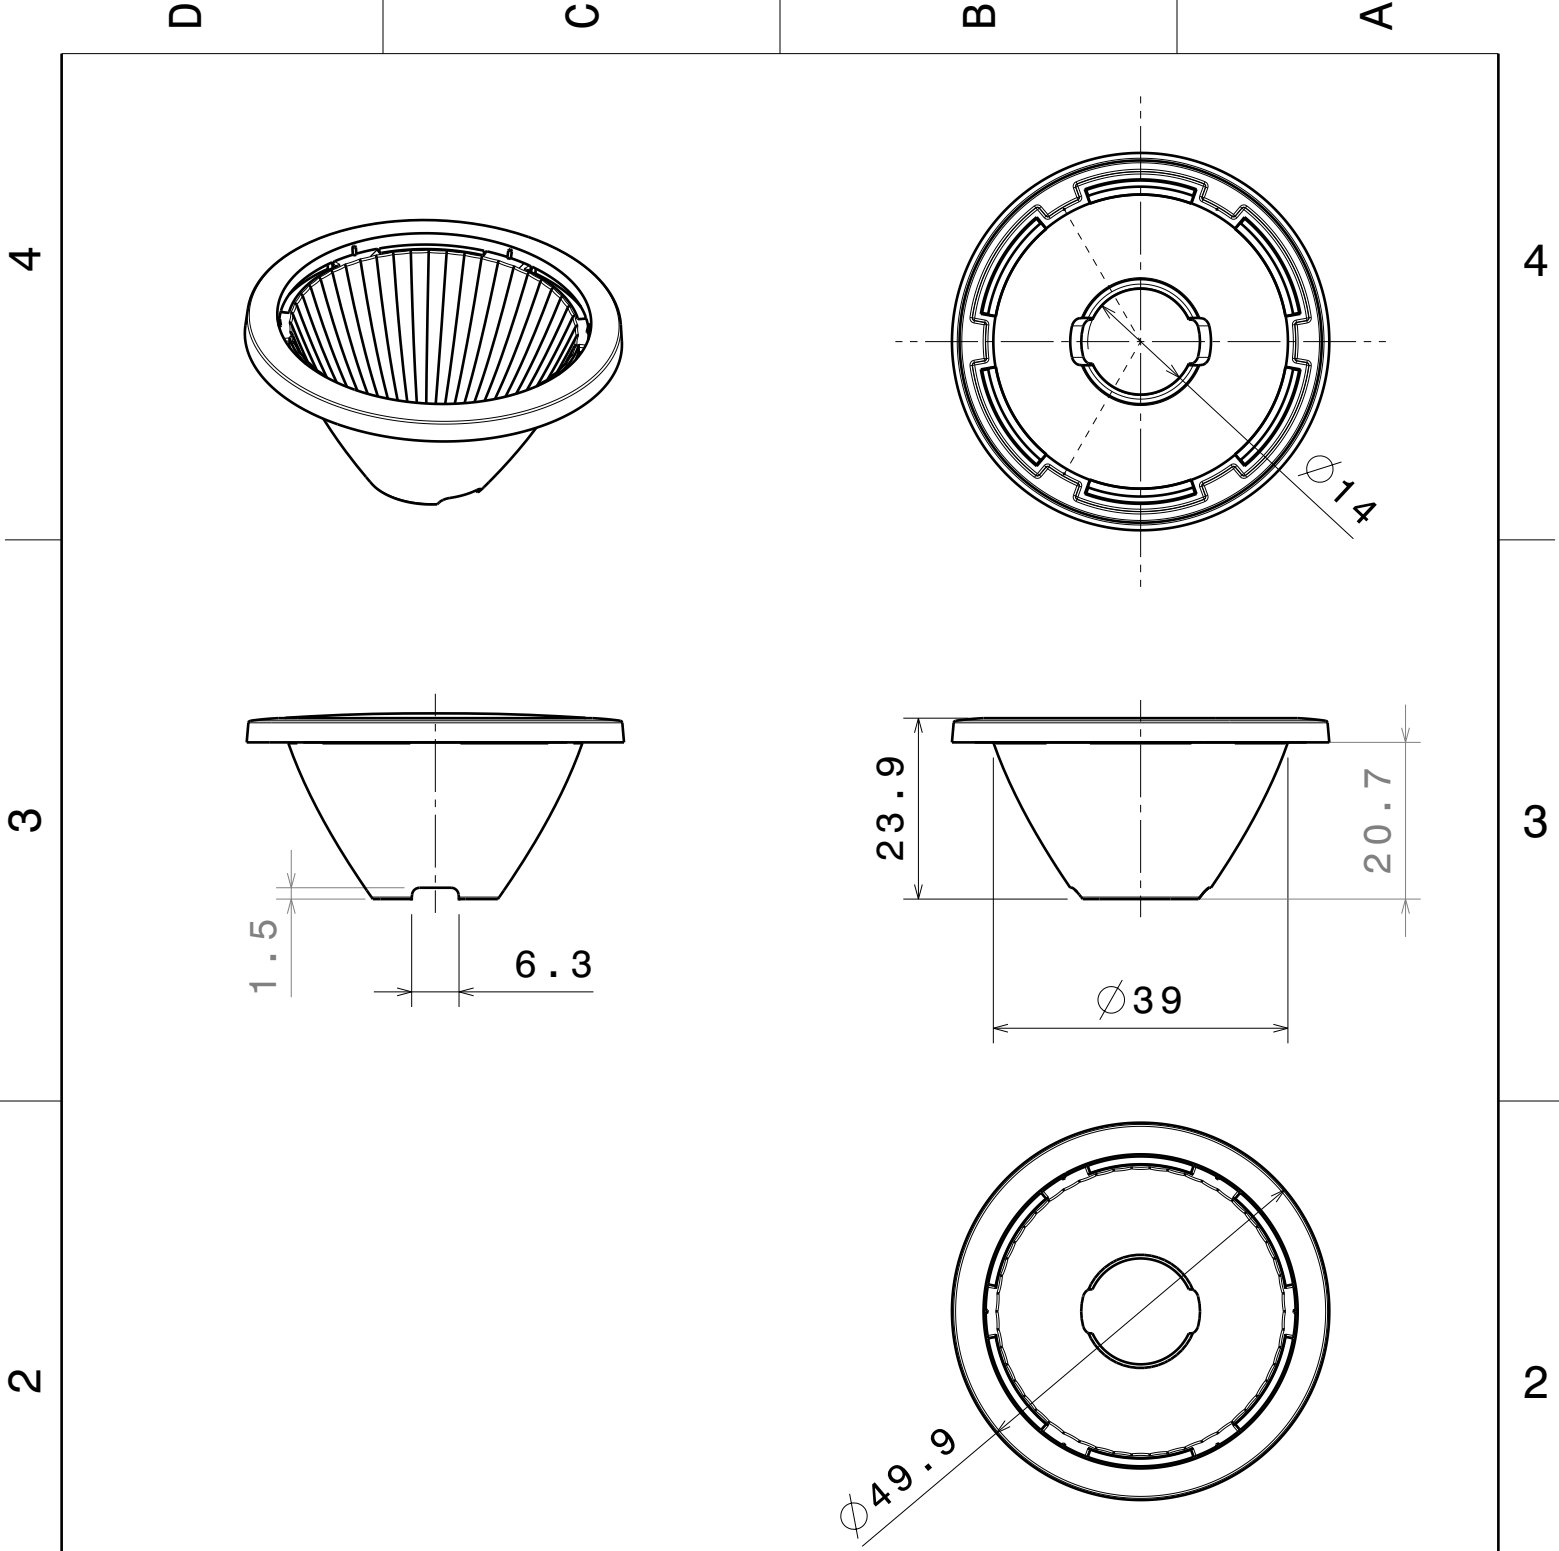

Material: PC, metal plated

This drawing is our property. It can't be reproduced or communicated without our written agreement.		<div></div> <div>Ledil Oy Salorankatu 10 FIN-24240 SALO Finland</div>	
		DRAWING TITLE	
DRAWN BY pl	DATE 25.11.2011	Datasheet Mirella reflector	
CHECKED BY	DATE	SIZE A4	REV 1
DESIGNED BY pl	DATE 25.11.2011	SCALE 1:1	WEIGHT (g)
			SHEET 1/1