THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AA	22

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	0	RLSD; NPR C97-014	24APR97	DLD	JT

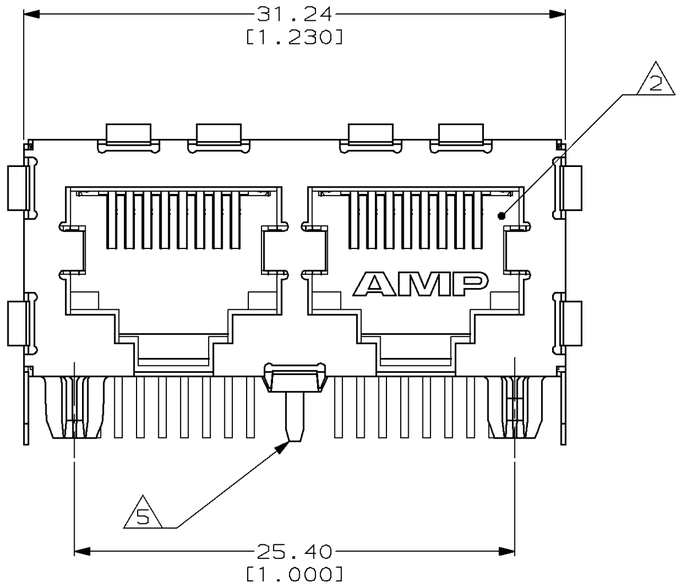

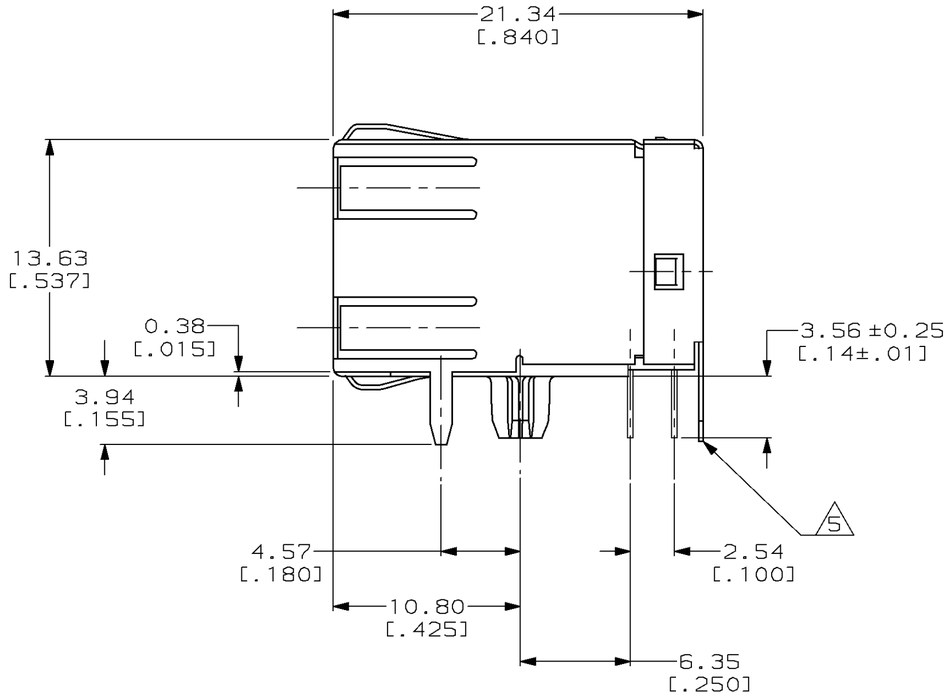

1. MATERIAL: HOUSING - HIGH TEMPERATURE NYLON, BLACK, IR COMPATIBLE, UL 94V-0.
TERMINALS - 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27µm [.000050] THICK HARD GOLD IN LOCALIZED AREA AND 3.81µm [.000150] THICK TIN-LEAD IN SOLDER AREA OVER 1.27µm [.000050] THICK NICKEL UNDERPLATE.
SHIELD - 0.254 [.010] THICK COPPER ALLOY PLATED WITH 2.03µm [.000080] MINIMUM TIN-LEAD OVER 2.54µm [.000100] MINIMUM COPPER.

2. JACK CAVITY COMFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

3. ALL DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.

4. THIS HOLE REQUIRED FOR -2 ONLY.

5. REAR GROUND TAB NOT REQUIRED FOR -1.

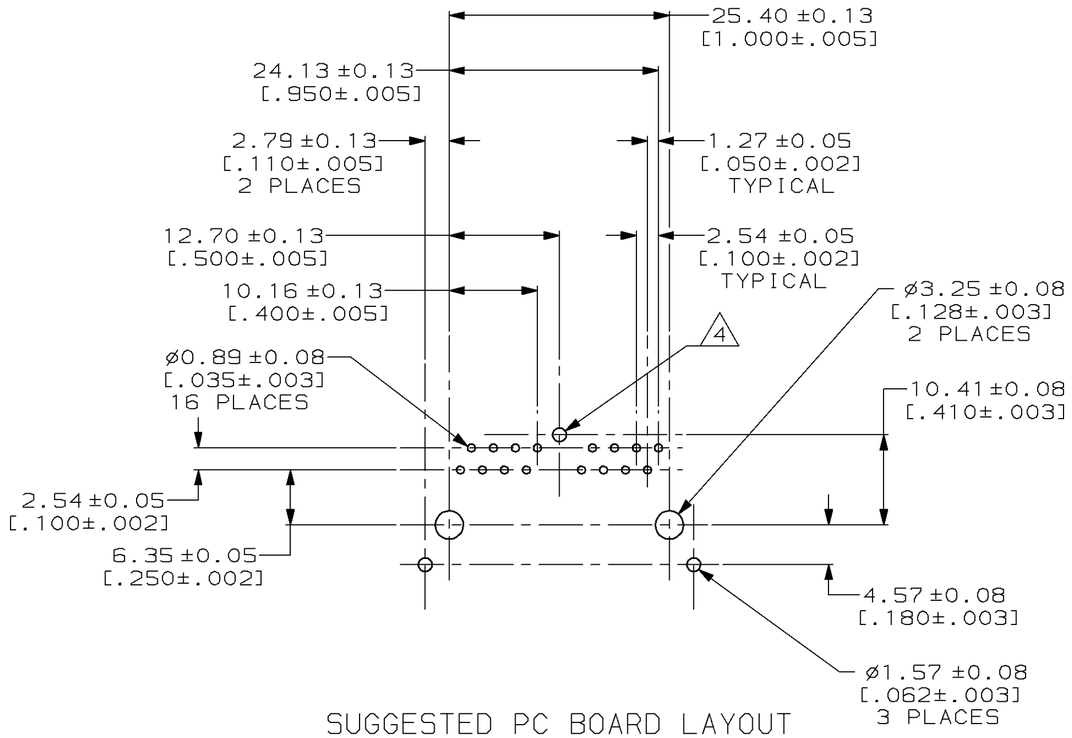

SUGGESTED PC BOARD LAYOUT
COMPONENT SIDE
SCALE 2:1

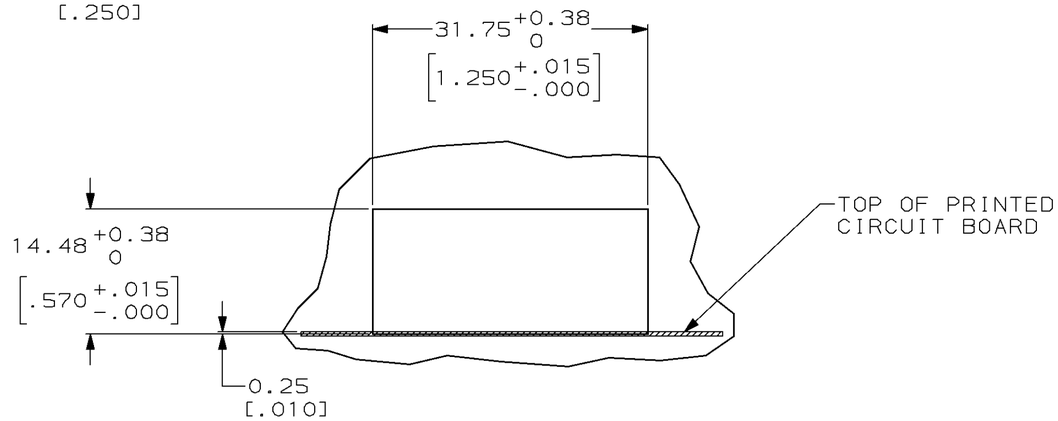

SUGGESTED PANEL CUTOUT
SCALE 2:1

WITH REAR PCB GROUND TAB	406562-2
5 WITHOUT REAR PCB GROUND TAB	406562-1
DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.25[.01]
3 PLC ±0.13[.005]
4 PLC ±-
ANGLES ±-

MATERIAL 1
FINISH 1

DWN DL DRUMMOND 24APR97
CHK DL DRUMMOND 25APR97
APVD J. TONEY 25APR97
PRODUCT SPEC 108-1163
APPLICATION SPEC 114-2048
WEIGHT -

AMP Incorporated
Harrisburg, PA 17105-3608

NAME MODULAR JACK ASSEMBLY, 2 PORT, 8 POSITION, RIGHT ANGLE, SHIELDED, CAT 4

SIZE	CAGE CODE	DRAWING NO
A2	00779	C-406562

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	0

406562