

LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			P4	REVISED PER ECR-12-011660			24JAN2013	KH	TM

1. MATES WITH HOUSING 350736.
2. NOTE DELETED.
3. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
4. CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00076 [0.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
5. CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00038 [0.000015] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.
6. PACKAGED PER SPEC 107-1202.
7. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
8. CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00076 [0.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
9. CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00038 [0.000015] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
10. DIMENSIONS IN BRACKETS ARE IN INCHES.
1. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
2. SUPERSEDED BY 350714-4

D

C





B

A

C

B


A

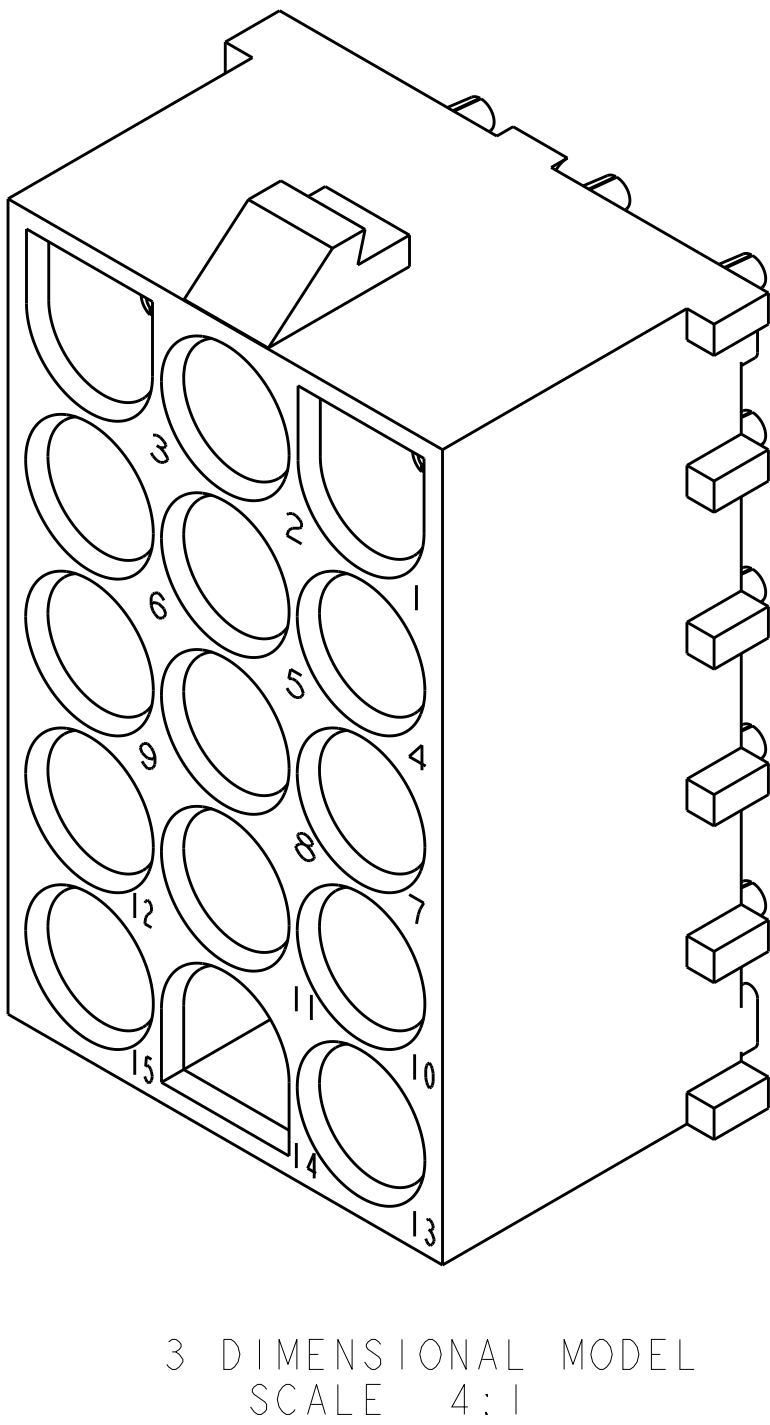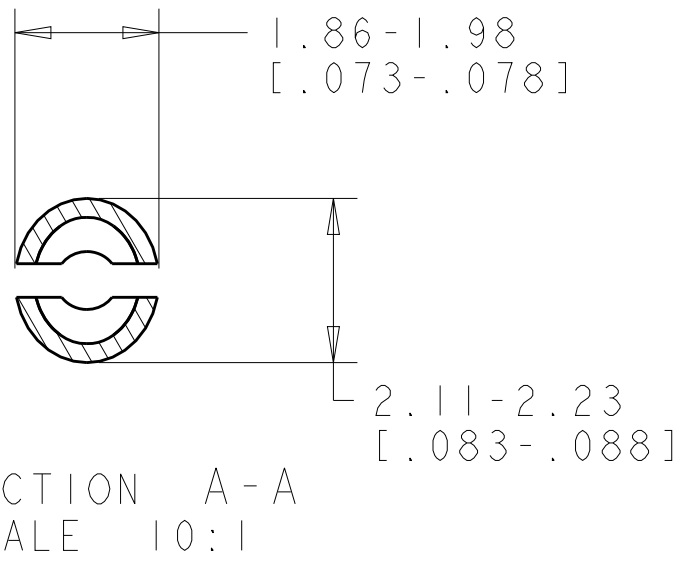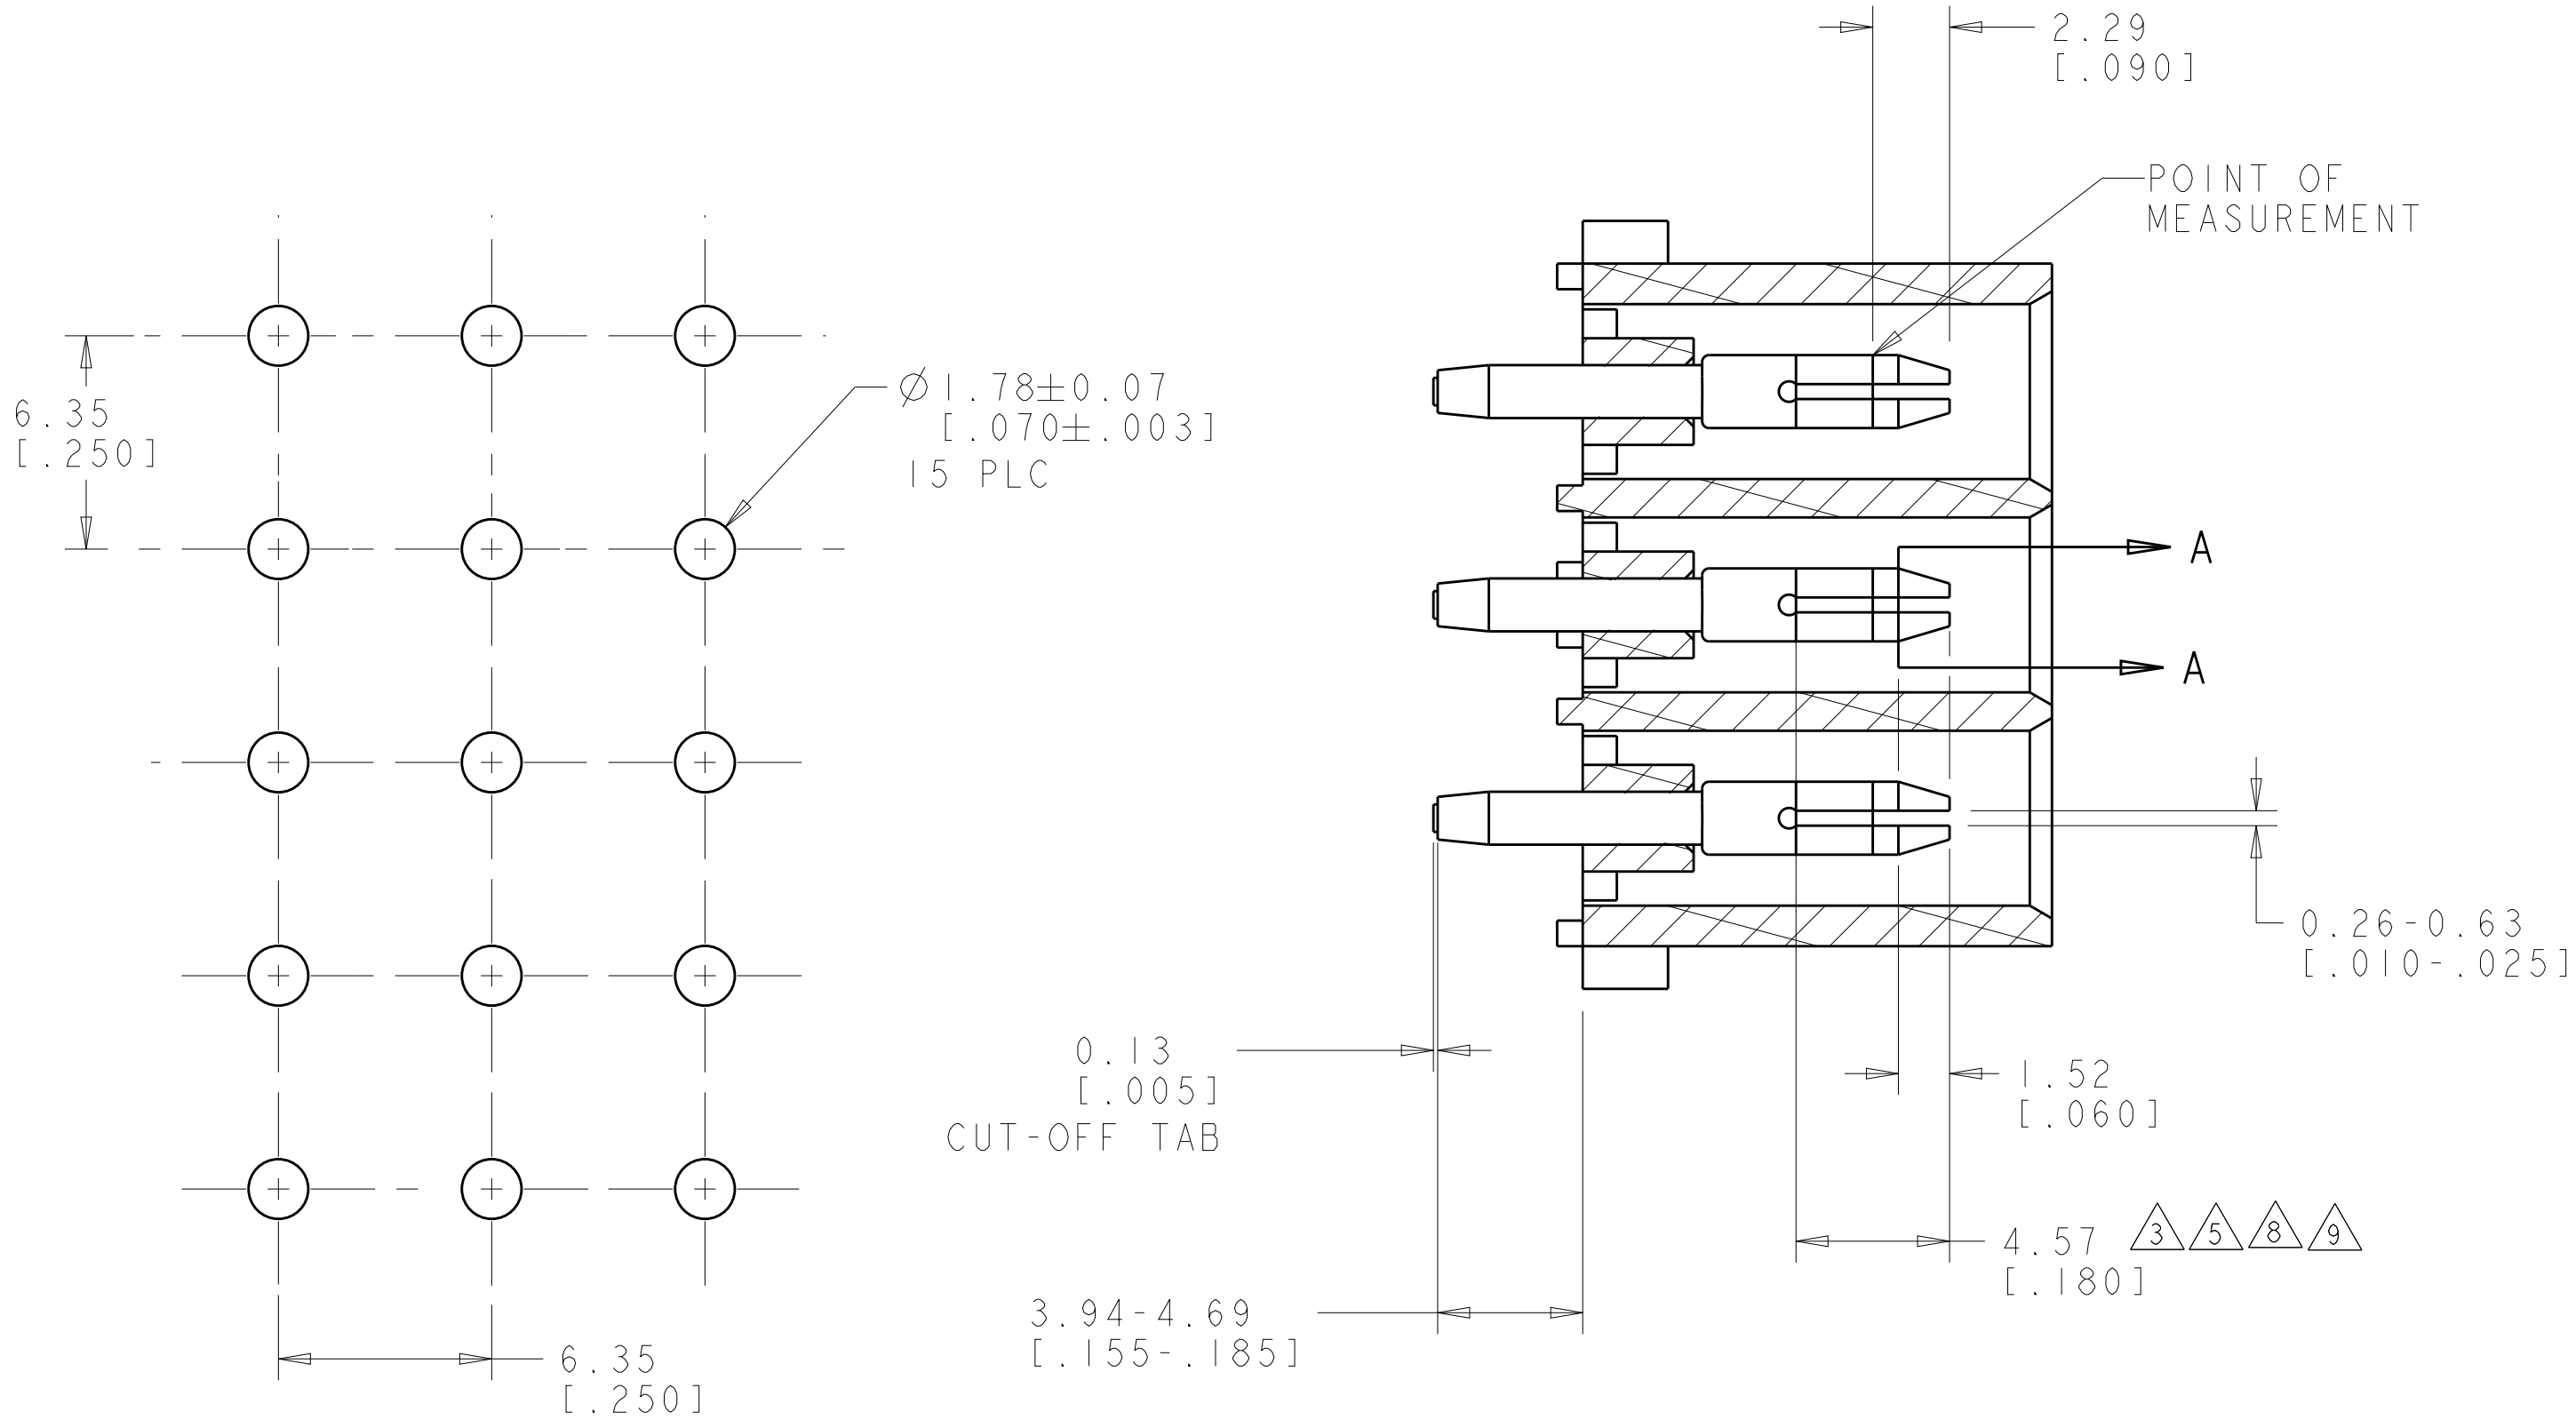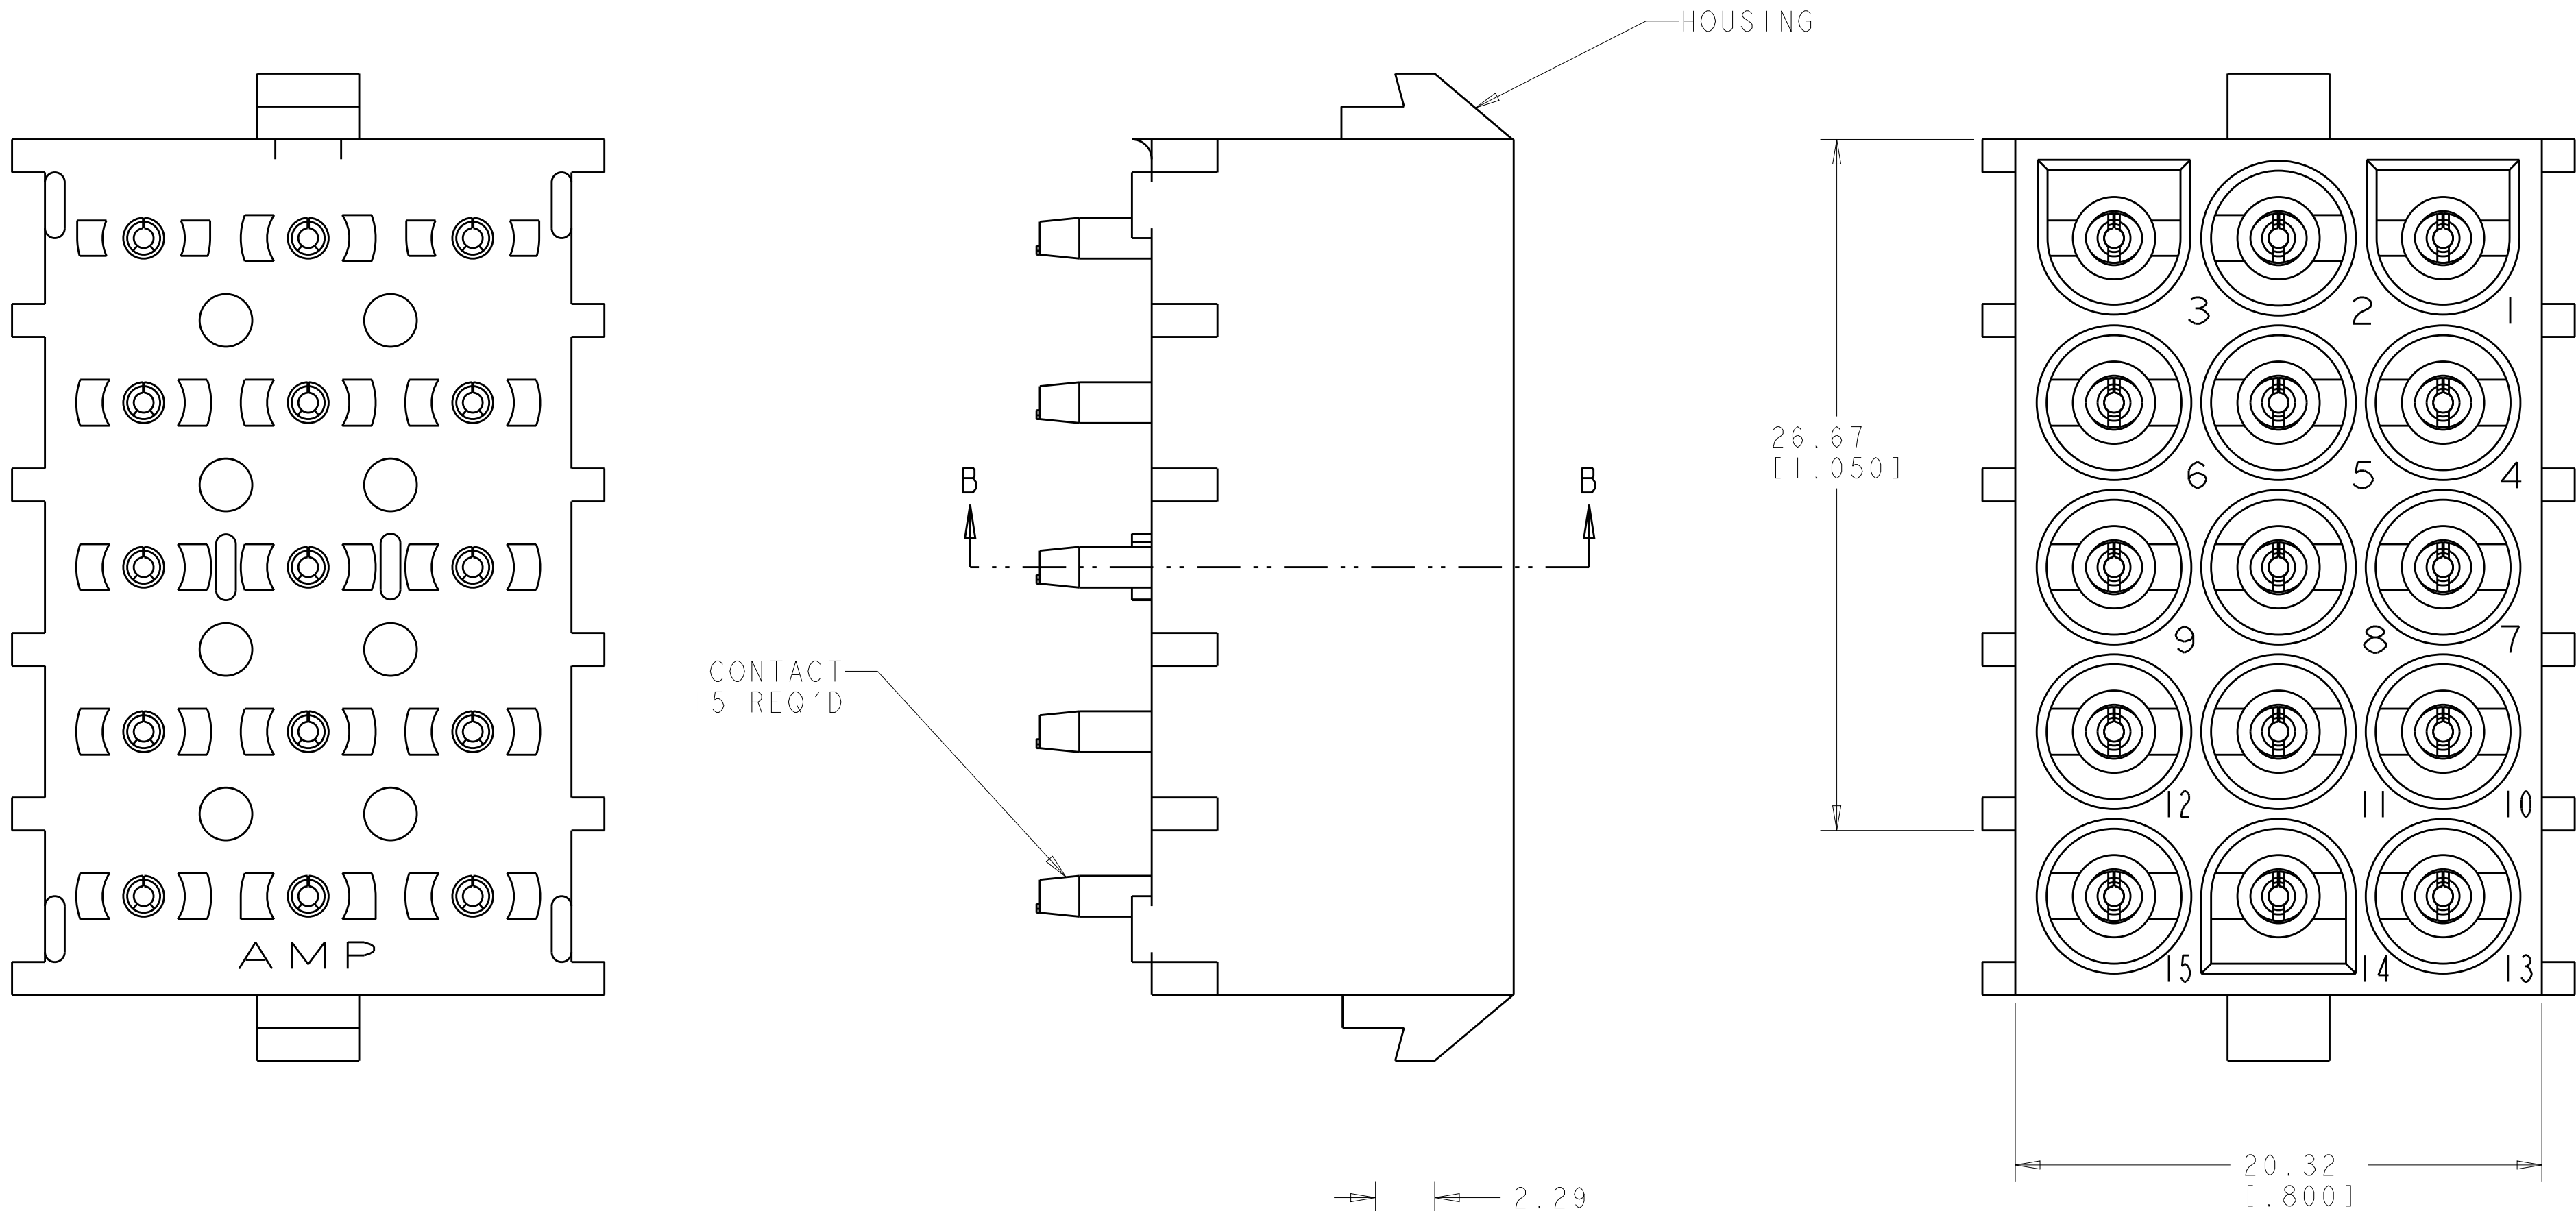

OBSOLETE	6	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, NATURAL	I-350714-1
		PHOSPOR BRONZE, GOLD	NYLON, UL94V-0, NATURAL	350714-5
		PHOSPOR BRONZE, GOLD	NYLON, UL94V-0, NATURAL	350714-4
OBSOLETE		PHOSPOR BRONZE, GOLD	NYLON, UL94V-0, NATURAL	350714-3
	2	PHOSPOR BRONZE, GOLD	NYLON, UL94V-0, NATURAL	350714-2
		PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0, NATURAL	350714-1
PIN CONTACT MATERIAL AND FINISH			HOUSING MATERIAL AND COLOR	PART NUMBER

RECOMMENDED MOUNTING HOLE PATTERN FOR 1.57 [0.062] THICK P.C. BOARD HOLE THAT CORRESPONDS TO REMOVED CONTACT CAN BE OMITTED

SECTION B-B

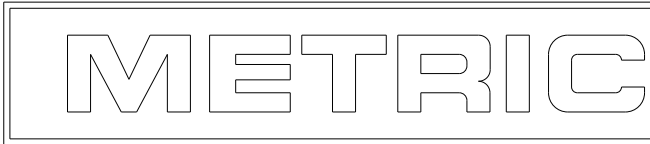

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 26JULY2005	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK S. RIDGILL 26JULY2005		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.13(.005) 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°30'	APVD S. RIDGILL 26JULY2005	NAME PIN HEADER ASSEMBLY, 15 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
			PRODUCT SPEC	
			APPLICATION SPEC	
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		SCALE 1:1	SHEET 1	OF 1
		REV P4		