

Technical Data Sheet

ARC Technologies Inc.
11 Chestnut St., Amesbury, MA 01913
Tel: (978) 388-2993
Fax: (978) 388-6866
www.arc-tech.com

LS-51251

Description: Flexible, low density, high loss, carbon impregnated urethane foam sheet. This product is fabricated with a chlorine-free urethane binder.

Sheet Size: 12" x 12" (30.5cm x 30.5cm)

Thickness: 0.125" \pm 0.030" (3.175 \pm 0.8mm)

Temperature Range: -70° to +250°F (-56°C to 121°C)

Mechanical Data

Resistivity: 0.0003 M-ohms/sq


Optional Features

PSA

Top Coat: Acrylic sealant

Ground Film: Conductive mylar

Electrical Data (Insertion Loss)

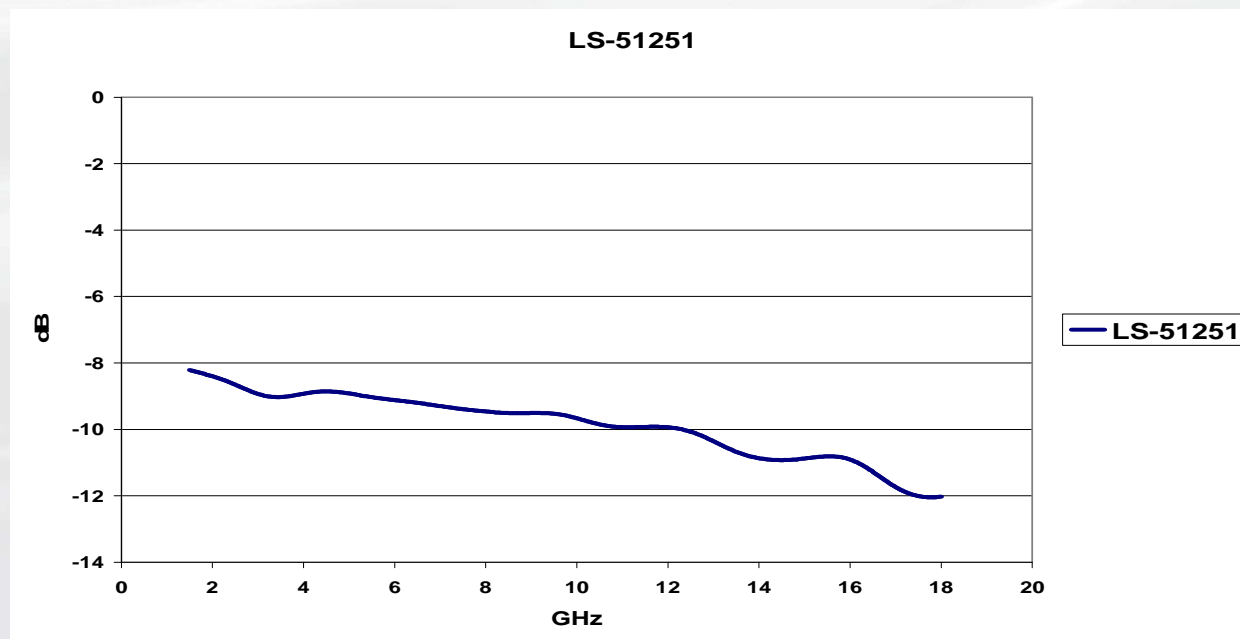

NOTE the information above is accurate at time of publication, but it is incumbent on the end to user to confirm compliance to their application.



ABSORBED IN TECHNOLOGY

www.arc-tech.com