FIBOX
Enclosing innovations

MNX ABS 95/50 LG

Sample photo

Order symbol:	ABS 95/50 LG	**EAN:**	6418074054708
Product nbr:	6082332	**El. number:**	
Description:	Enclosure, ABS	Finland:	3421378
Remarks:	Grey cover	Denmark:	8212023932
		Sweden:	6082332
		Norway:	

Including: Base with PUR gasket, screws for mounting plate/DIN-rail and cover with polyamide cover screws.

Dimensions:	**Length**	**Width**	**Height**
mm:	100	100	50
inch:	3.9	3.9	2.0

Materials:

Material:	ABS
Base colour:	RAL 7035
Cover colour:	RAL 7035
Cover screws material:	Polyamide
Cover screws colour:	Grey
Gasket material:	Polyurethane

Temperatures:

Short term:	-40 ... 80 °C
Continuous:	-40 ... 60 °C
Short term:	-40 ... 175 °F
Continuous:	-40 ... 140 °F

Accessories:

MIV 95	Mounting plate (Galvanized steel)
MIN 8	DIN-15 Mounting rail
B-3	DIN-35 Mounting rail
FP 22046	Wall fastening lug (4 pcs)

Rating:

Ingress Protection (EN 60529): IP 66/67
Impact Resistance (EN 62262): IK 07
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
Flammability Rating (UL 746 C 5): UL 94 HB
Glow Wire Test (IEC 695-2-1) °C: 650
NEMA Class: NEMA 1, 4, 4X, 6, 12, 13

Certificates:

Fimko
Europe EN 62208: 2003
Gost R

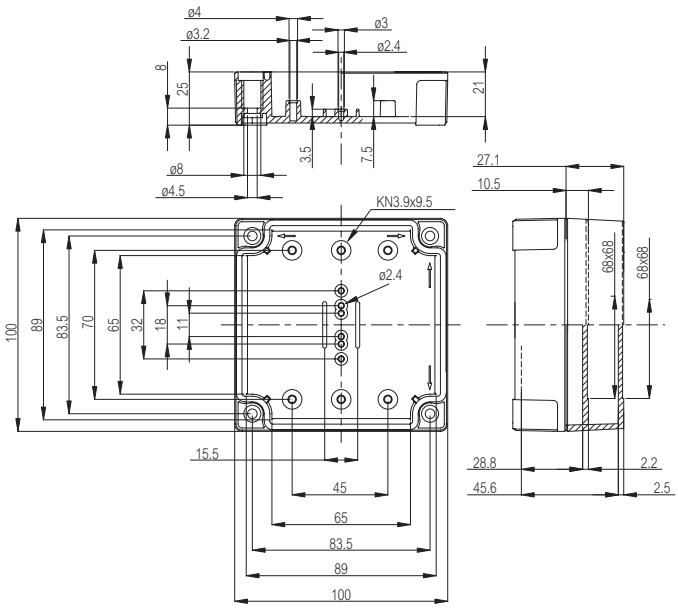

© Fibox Oy, Data subject to change without notice (printed: 12.11.2012)